

SINGLE-PHASE TL INVERTER WITH A DOUBLE MPPT SYSTEM

2.8TL U M / 3.3TL U M / 5TL U M / 6TL U M

The INGECON® SUN 1Play TL U M inverters have been designed to maximize the power generation and also to facilitate user access to the PV plant. This solar inverter family is valid for low kilowatt residential applications, and also for decentralized commercial and utility-scale systems rated up to several hundred kilowatts. In domestic installations, these inverters present the great advantage of integrating an arc fault circuit interruption system (AFCI). Moreover, they are compatible with 30 mA RCDs, the most commonly used to protect the people against electric discharges.

High efficiency system

Ingeteam has developed its own technology to maximize the efficiency rates of the INGECON® SUN 1Play TL U M inverter family. Thanks to this high efficiency system and to the use of innovative electronic conversion topologies, values of up to 98.9% can be achieved. Furthermore, an advanced double-MPPT algorithm makes it possible to harness the maximum energy from the PV array at all times, even in difficult situations, such as scattered clouds and partial shadings.



Easy to install

Every country-specific configuration and language can be easily selected from the inverter screen. Moreover, the INGECON® SUN 1Play TL U M inverters are compatible with all the PV module technologies on the market.

Simple operation and maintenance

Ingeteam is at the forefront of innovative firmware. As a result, the INGECON® SUN 1Play TL U M inverters are extremely easy to operate. The menu displayed on the LCD screen has been designed so that it is simple and easy to use. These inverters feature an internal datalogger for several months data storage, accessible from a PC. Every inverter can be accessed from either a remote PC or on-site from the inverter front touch keypad through its LCD screen. The display also features a number of LEDs to indicate the inverter operating status. These LED indicators light up whenever any incident is detected, thereby simplifying and facilitating equipment maintenance tasks.

Firmware updating

The INGECON® SUN 1Play TL U M inverters allow the user to perform the firmware (FW) updating himself. It is as easy as to download the latest version of the firmware from the Ingeteam website: www.ingeteam.com, and update it using a simple SD memory card. These photovoltaic inverters feature a SD input slit to facilitate the firmware updating by the user.

Standard 10 year warranty, extendable for up to 20 years

2.8TL U M / 3.3TL U M / 5TL U M / 6TL U M

Monitoring and communication

The internal operating variables and the internal datalogger can be monitored through a number of media such as USB communications, supplied as standard. Also, RS-485, Ethernet, Wi-Fi, Bluetooth and GSM / GPRS communications are available upon demand. Included at no extra cost are the INGECON® SUN Manager, INGECON® SUN Monitor and its Smartphone version iSun Monitor -available on the App Store- for monitoring and recording the inverter data over the Internet.

Able to withstand extreme conditions

The INGECON® SUN 1Play TL U M inverter housing is suitable for outdoor use (NEMA 4). Likewise, it can be used under extreme atmospheric conditions with temperature ranges from -13 °F to +149 °F, although its main cooling system is natural air convection.

SiC technology

This solar inverter presents silicon carbide (SiC) components. SiC technology allows higher efficiency levels and also a more reliable, light and compact equipment.

Easy rooftop installation

Vertical or horizontal mounting, enabling the location of the inverter next to the PV modules and avoiding the installation of any additional rapid shutdown device.

PROTECTIONS

- Reverse polarity.
- Input and output overvoltages with type 3 surge arresters.
- Output shortcircuits and overloads.
- Anti-islanding with automatic disconnection.
- Insulation failures.


OPTIONAL ACCESSORIES

- Inverter communication via RS-485, Ethernet, Bluetooth or GSM / GPRS.
- Combiner Box with arc-fault circuit interruption and DC switch.
- INGECON® SUN WeatherBox for meteorological values measurement and registration.
- Four additional digital inputs.
- Self-consumption kit.

MAIN FEATURES

- AFCI (Arc Fault Circuit Interrupt).
- Compatible with 30 mA RCDs.
- Easy rooftop installation.
- Double-MPPT system.
- Available from 2.8 up to 6 kW.
- 98.9% maximum efficiency.
- SiC Technology inside.
- Inverter updating by the user through a SD memory card.
- USB communications.
- Two digital inputs as standard.
- Software INGECON® SUN Manager for PV plant access and data registration.
- Software INGECON® SUN Monitor for PV plant monitoring.
- LCD Display.
- Easy maintenance.
- Suitable for indoor and outdoor installations (NEMA 4).
- Display-configurable potential free contact, to indicate insulation fault or grid connection.
- Compact design.
- Plug & Play technology.
- Language, Country Code and rated voltage configurable by display.

1Play TL U M

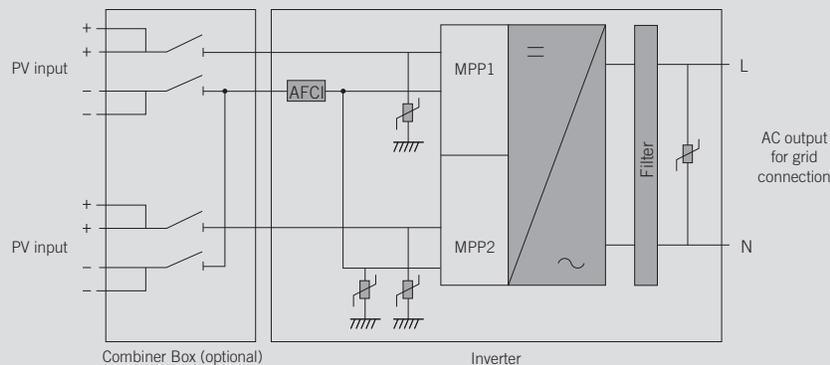

Combiner Box


The Combiner Box is supplied with two inputs per MPPT, DC switch.

COMBINER BOX MAIN FEATURES

- DC switch.
- 2 MPPTs (2 inputs per MPPT).
- Fuses not required, according to NEC 2014 690.9.




Size and weight (inches)

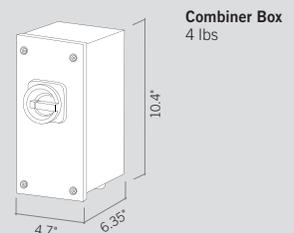


	2.8TL U M	3.3TL U M	5TL U M	6TL U M
Input (DC)				
Recommended PV array power range ⁽¹⁾	2.8 - 3.6 kW	3.4 - 4.3 kW	5.1 - 6.5 kW	6.1 - 7.8 kW
Voltage range MPP ⁽²⁾	125 - 750 V	125 - 750 V	125 - 750 V	125 - 750 V
Voltage range MPP2 ⁽²⁾⁽³⁾	90 - 750 V	90 - 750 V	90 - 750 V	90 - 750 V
Min. voltage for Pnom with parallel inputs	127 V	150 V	227 V	273 V
Maximum voltage ⁽⁴⁾	850 V	850 V	850 V	850 V
Maximum current (Input 1 / Input 2)	11 / 11 A	11 / 11 A	11 / 11 A	11 / 11 A
Inputs (Input 1 / Input 2)	1 / 1	1 / 1	1 / 1	1 / 1
MPPT	2	2	2	2
Output (AC)				
Rated power	2.8 kW	3.3 kW	5 kW	6 kW
Max. temperature at rated power ⁽⁵⁾	113 °F	113 °F	113 °F	113 °F
Maximum current	16 A	16 A	26.2 A	26.2 A
Rated voltage	208 / 240 V	208 / 240 V	208 / 240 V	240 V
Frequency	60 Hz	60 Hz	60 Hz	60 Hz
Phi Cosine	1	1	1	1
Phi Cosine adjustable	Yes. Smax=2.8 kVA	Yes. Smax=3.3 kVA	Yes. Smax=5 kVA	Yes. Smax=6 kVA
THD	<3%	<3%	<3%	<3%
Efficiency				
Maximum efficiency	98.6%	98.5%	98.4%	98.9%
CEC - Weighted efficiency	97%	97.5%	97.5%	98%
General Information				
Refrigeration system	Natural air convection		Forced ventilation	
Stand-by consumption ⁽⁶⁾	<10 W	<10 W	<10 W	<10 W
Consumption at night	0 W	0 W	0 W	0 W
Ambient temperature	-13 °F to 149 °F	-13 °F to 149 °F	-13 °F to 149 °F	-13 °F to 149 °F
Relative humidity (non-condensing)	0 - 100%	0 - 100%	0 - 100%	0 - 100%
Protection class	NEMA 4	NEMA 4	NEMA 4	NEMA 4
DC AFCI	✓			
Marking	CE, ETL			
EMC & Security standards	UL1741, FCC Part 15, IEEE C37.90.1, IEEE C37.90.2			
Grid connection standards	IEC 62116, UL1741, IEEE1547, IEEE1547.1, NEC CODE			

Notes: ⁽¹⁾ Depending on the type of installation and geographical location ⁽²⁾ The output power will be conditioned by the voltage and current configuration selected at each input ⁽³⁾ To drop to 90 V, the other input must be at least at 125 V ⁽⁴⁾ Must not be exceeded under any circumstances. Consider the voltage increase of the 'Voc' at low temperatures ⁽⁵⁾ The output power will be reduced at the rate of 1% for each 1 °F of increase ⁽⁶⁾ Consumption from PV field.

Efficiency INGECON® SUN 6TL U M Vdc = 680 V

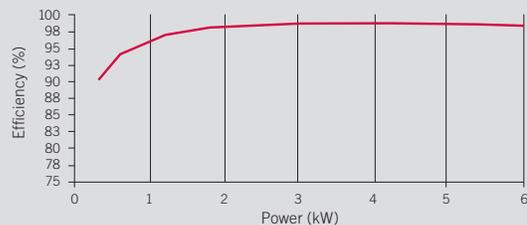

Size and weight (inches)



2.8TL U M / 3.3TL U M
44.1 pounds
5TL U M / 6TL U M
46.3 pounds



Ingeteam

Ingeteam INC.

5201 Great American Parkway, Suite 320
SANTA CLARA, CA 95054 - USA
Tel.: +1 (415) 450 1869 / +1 (408) 524 2929 / Fax: +1 (408) 824 1327
e-mail: solar.us@ingeteam.com

Ingeteam INC.

3550 W. Canal St.
MILWAUKEE, WI 53208 - USA
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190 / Fax: +1 (414) 342 0736
e-mail: solar.us@ingeteam.com

Ingeteam Power Technology, S.A.

Avda. Ciudad de la Innovación, 13
31621 SARRIGUREN (Navarra) - Spain
Tel.: +34 948 288 000 / Fax: +34 948 288 001
e-mail: solar.energy@ingeteam.com

Ingeteam S.r.l.

Via Emilia Ponente, 232
48014 CASTEL BOLOGNESE (RA) - Italy
Tel.: +39 0546 651 490 / Fax: +39 054 665 5391
e-mail: italia.energy@ingeteam.com

Ingeteam GmbH

Herzog-Heinrich-Str. 10
80336 MUNICH - Germany
Tel.: +49 89 99 65 38 0 / Fax: +49 89 99 65 38 99
e-mail: solar.de@ingeteam.com

Ingeteam SAS

La Naurouze B - 140 rue Carmin
31670 Labège - France
Tel: +33 (0)5 61 25 00 00 / Fax: +33 (0)5 61 25 00 11
e-mail: france@ingeteam.com

Ingeteam, a.s.

Technologická 371/1
70800 OSTRAVA - PUSTKOVEC
Czech Republic
Tel.: +420 59 732 6800 / Fax: +420 59 732 6899
e-mail: czech@ingeteam.com

Ingeteam Shanghai, Co. Ltd.

Shanghai Trade Square, 1105
188 Si Ping Road
200086 SHANGHAI - P.R. China
Tel.: +86 21 65 07 76 36 / Fax: +86 21 65 07 76 38
e-mail: shanghai@ingeteam.com

Ingeteam, S.A. de C.V.

Ave. Revolución, nº 643, Local 9
Colonia Jardín Español - MONTERREY
64820 - NUEVO LEÓN - México
Tel.: +52 81 8311 4858 / Fax: +52 81 8311 4859
e-mail: northamerica@ingeteam.com

Ingeteam Ltda.

Estrada Duílio Beltramini, 6975
Chácara Sao Bento
13278-078 VALINHOS SP - Brazil
Tel.: +55 19 3037 3773 / Fax: +55 19 3037 3774
e-mail: brazil@ingeteam.com

Ingeteam Pty Ltd.

Unit 2 Alphen Square South
16th Road, Randjiespark, Midrand 1682 - South Africa
Tel.: +2711 314 3190 / Fax: +2711 314 2420
e-mail: southafrica@ingeteam.com

Ingeteam SpA

Cerro El Plomo 5630, Piso 9, Oficina 901
7560742 Las Condes - Santiago de Chile - Chile
Tel.: +56 2 26664370
e-mail: chile@ingeteam.com

Ingeteam Power Technology India Pvt. Ltd.

2nd Floor, 431
Udyog Vihar, Phase III
122016 Gurgaon (Haryana) - India
Tel.: +91 124 420 6491-5 / Fax: +91 124 420 6493
e-mail: india@ingeteam.com

Ingeteam Sp. z o.o.

Ul. Koszykowa 60/62 m 39
00-673 Warszawa - Poland
Tel.: +48 22 821 9930 / Fax: +48 22 821 9931
e-mail: polska@ingeteam.com

Ingeteam Australia Pty Ltd.

Suite 112, Level 1, Mike Codd Building 232
Innovation Campus, Squires Way
North Wollongong, NSW 2500 - Australia
Tel.: +61 499 988 022
e-mail: australia@ingeteam.com