


Vishakha 1500 V PVDF is a fluoride based weather stable and UV stable back sheet. It can be used for all Crystalline PV Module Manufacturing.

S.N	Properties	UOM	Test Method	Vishakha PVDF	
1	Thickness	µm	Micro meter	370 ± 5 %	
2	Width	Mm	Scale	Up to 1250	
3	Tensile Strength	MPa	ASTM D 882	MD	100
				TD	100
4	Elongation	%	ASTM D 882	MD	≥100
				TD	≥100
5	Thermal Shrinkage @ 150 °C / 30 min	%	ASTM D 1204	MD	≤1.5
				TD	≤0.5
6	Interlayer Adhesion	N/cm	ASTM D 903	PVDF-PET	≥4
				PET- Primer	≥4
7	Adhesion with EVA	N/cm	ASTM D 903	≥75	
8	Breakdown Voltage	Kv/mm	ASTM D 3755	71.55	
9	Dielectric Strength	Kv/mm	ASTM D 149	43.14	
10	Comparative Tracking Index	V	IEC 60112	600	
11	Radiant Panel Test	-	ASTM E 162	75	
12	RTI – Electrical	Deg C	UL 1703	140	
13	RTI – Mechanical	Deg C	UL 1703	150	

Construction of Vishakha 1500 V PVDF backsheet		
Layer No	Particulars	Thickness (µ)
1	Air side layer – PVDF	25
2	Adhesive	10
3	PET	275
4	Adhesive	10
5	Cell side – VishPrime	50
Total Thickness of Back sheet		370

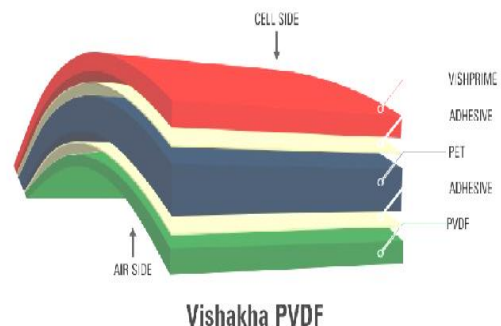

**UL recognised under File No: QIHE2.E487880**

Storage Condition : To be stored in sealed packing at temperature < 30 °C & Humidity < 60 %

Shelf life : It is recommended to use within 12 months from the date of manufacture

---

The above properties are typical range of properties and not to be used for designing or establishing the limits of specifica

The above properties are typical range of properties and not to be used for designing or establishing the limits of speci