




Qoltec Hybrid Solar Inverter Off-Grid 3KVA | 2.4KW | 80A | MPPT | Sinus

Product code: 53876

The off-grid hybrid inverter converts the energy created by PV modules into energy needed to power electrical appliances. It works as a solar charger and battery charger. Equipped with a multifunctional LCD display that records operating data allowing continuous monitoring and management of the entire system. The inverter operates in off-grid mode.

It has a built-in 80A MPPT charge controller. Possibility to connect an additional wi-fi module. Does not support BMS.

HOW DOES THE OFF-GRID HYBRID INVERTER WORK?

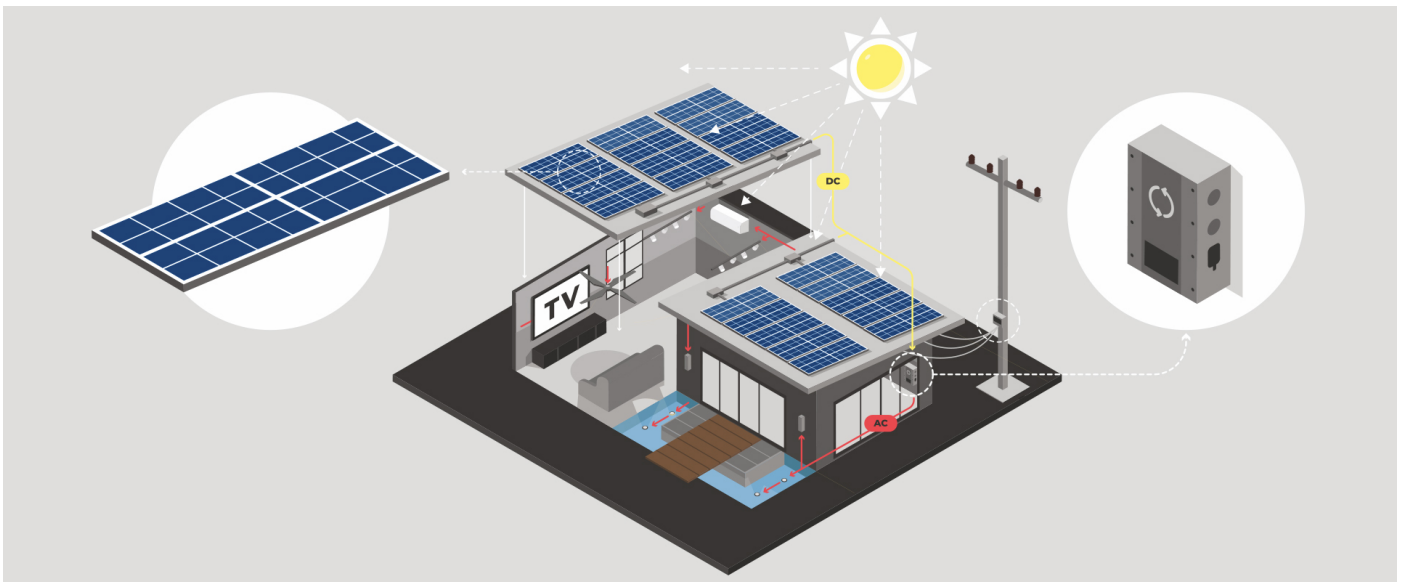

The efficiency of a solar PV system depends on the selection of the right inverter, or solar inverter. The inverter performs a key function in this system, changing the DC current generated by the solar PV panels into AC current used by household appliances.

The off-grid hybrid inverter combines the solar PV system, energy storage and the power grid. During the day, it charges the energy storage from the photovoltaic panels. The energy storage unit powers household appliances from the stored energy during the day, and when the batteries are discharged, it draws energy from the grid.


The inverter works in off-grid mode, using excess solar energy to power consumers and charge the battery. In the event of an emergency, current is drawn from the solar PV system to the energy storage and can safely and uninterruptedly ensure the continuous operation of our appliances.

WHY SHOULD YOU CHOOSE A HYBRID INVERTER ?



- Pure sine wave inverter,
- automatic restart during power restoration,
- easy-to-read multifunction LCD display,
- 80A MPPT charge controller,
- ability to be powered by mains or generator,
- ability to change AC/Solar charger priority settings via LCD display,
- intelligent charger design for optimal battery performance,
- configurable input voltage range for home appliances and personal computers using the settings on the LCD display panel,
- configurable battery charging current according to devices and personal computers via settings on the LCD display panel,
- protection against overload, overheating, overcharging and short circuit,
- cold start function,


MAXIMIZE THE POSSIBILITIES WITH MPPT TECHNOLOGY

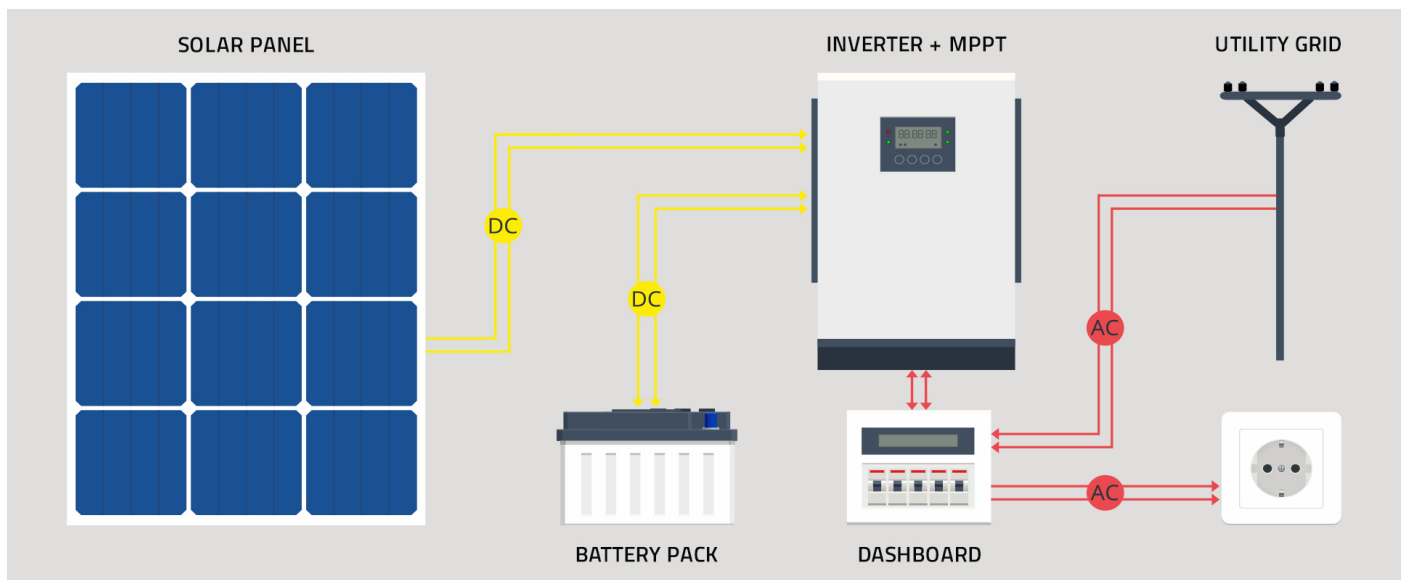

The battery charging inverter uses a state-of-the-art 100A MPPT charge controller to maximize the power drawn from the photovoltaic panels, using advanced maximum power point tracking technology.

Having this feature significantly affects the efficiency of the photovoltaic installation—they can maintain high power even in low sunlight conditions. In addition, the controller controls the battery operation and charging process and protects the battery from damage.

MULTIFUNCTION LCD DISPLAY

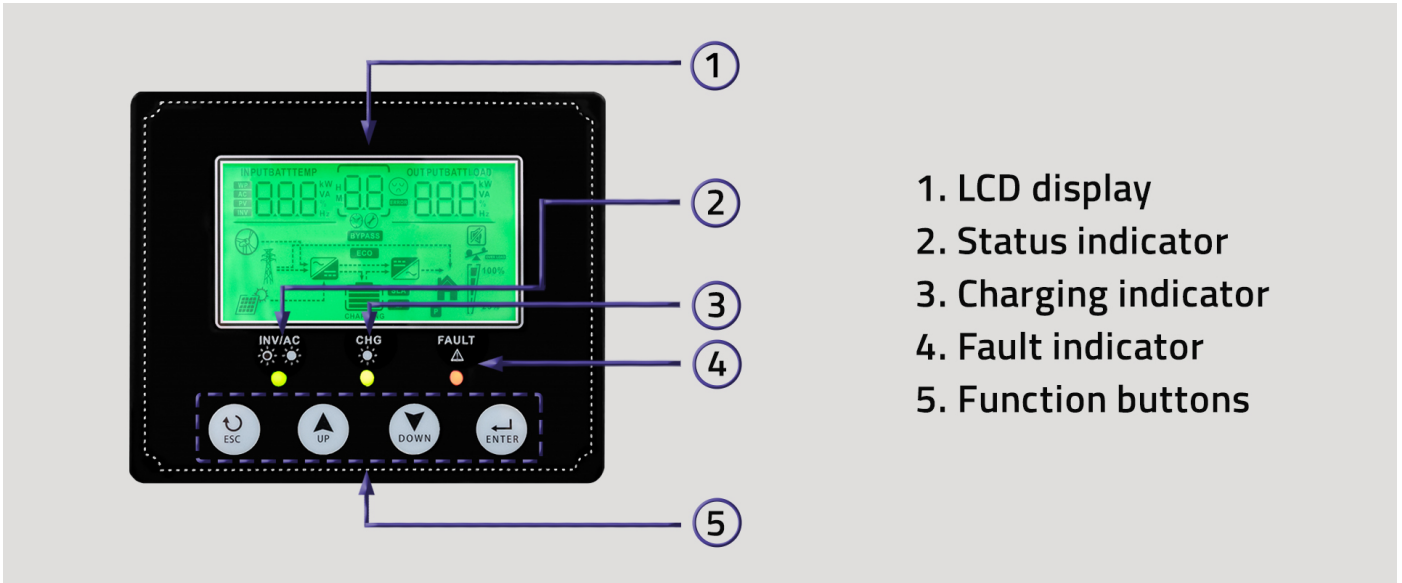

The product is equipped with a multifunctional, easy-to-use LCD display with control panel. Facilitates monitoring of the entire photovoltaic installation . Allows you to configure the input voltage range for home appliances and personal computers or change the priority settings of the AC/Solar charger. In addition, the display records data and informs about failures, reacting accordingly if any of the parameters exceed the norm. If a fault occurs, the inverter shuts down.

CONFIDENCE CONFIRMED BY A WARRANTY

Get clean energy with our solar inverters! Product comes with a **24 month** warranty from the date of purchase.

TECHNICAL DATA

Producer	Qoltec
Type	Off-Grid
Phase	1
Rated Power	3000VA/2400W
Input parameters	
Nominal Input voltage	230VAC
Input Voltage Range	120 - 450 VAC
Working frequency	50/60 HZ
Output parameters	
Maximum power	6000W
Efficiency	95%
Transfer time	10 ms (PC) 20 ms (home appliances)
Waveform	Pure sine wave
Features of the battery	
Type of charging	MPPT
Battery voltage	24 VDC
Battery charging voltage	27VDC
Battery overcharge protection	31VDC
Variable charging voltage	27VDC
Built-in battery	No
Maximum battery charging current from PV	80 A
Solar charger	
Maximum PV array open circuit power	3000 W
MPPT operating voltage range	120 ~ 450VDC
Maximum PV array open circuit voltage	450 VDC
Maximum charging current	80A
Other parameters	
Screen	LCD
EAN code	5901878538761