

## SINGLE-PHASE HYBRID INVERTER WITH TWO SOLAR MPPTs

### 3TL M / 4.5TL M / 6TL M

The INGECON® SUN STORAGE 1Play TL M hybrid inverter makes it possible to combine photovoltaic generation and energy storage with no need for any additional PV inverters.

#### Dual MPPT system

This inverter features a dual maximum power point tracking (MPPT) system, that allows it to draw the maximum power from the PV array, including roof-mounted installations with different orientations or with partial shading.

#### EMS Inside

The inverter is equipped as standard with an energy management system (EMS). The EMS permits more advanced functionalities, such as

self-consumption. Thanks to the built-in EMS, the installation can be monitored at all times via a PC or mobile phone with the free INGECON® SUN Monitor application, available at Play Store and App Store.

#### Start-up and monitoring

Fast and easy start-up and display of data and graphics through the integrated user interface. Furthermore, users can easily upgrade the inverter firmware from the application, through a PC, tablet or mobile.

#### 5 year warranty, extendible up to 25 years

#### PROTECTIONS

- AC overvoltages.
- Insulation faults.
- Short-circuits and overloads at the output.
- DC breaker for the PV array.
- Anti-islanding with automatic disconnection.

#### FEATURES

- Dual MPPT system.
- RS-485 communication for the wattmeter.
- Wi-Fi and Ethernet communication.
- CAN Bus 2.0 communication for the BMS (Battery Management System).
- 2 configurable digital inputs.
- 2 configurable potential free outputs.
- Pre-charging system at the battery input.
- Relay for the neutral to earth connection for critical loads in type TT installations.
- Rapid start-up and view of the installation thanks to the INGECON® SUN Monitor user interface.
- Possibility of operating just from the PV array and of adding the storage system at a later date.
- Suitable for indoor and outdoor installations (IP65).
- Back-up functionality available for self-consumption installations.
- Peak shaving functionality.
- Configuration of the battery charge / discharge times.
- Modbus TCP / Wi-Fi communication with EV chargers.
- DRMO included (for the Australian market).



PV+battery hybrid systems, stand-alone and grid-connected

OPERATING MODES:

GRID CONNECTED MODES


- Self-consumption Mode

This operating mode is directed at grid connection systems with renewable energy sources, in order to minimise grid consumption. If the energy generated is greater than demand, then any surplus energy could either be used to charge the batteries or to be injected into the grid. In addition, it features a back-up and a peak shaving functionality. Also, the user can programme the charge / discharge times of the batteries.

- UPS mode

This operating mode has been designed for systems where grid outages are long and frequent, meaning that a back-up power source is required. In order to guarantee a power source, the inverter maintains the batteries charged. During a grid outage, the inverter generates an AC network and the energy stored in the batteries is used to power the critical loads. Its rapid response time means that the grid outage is insignificant for most loads.

SELF-CONSUMPTION DIAGRAM

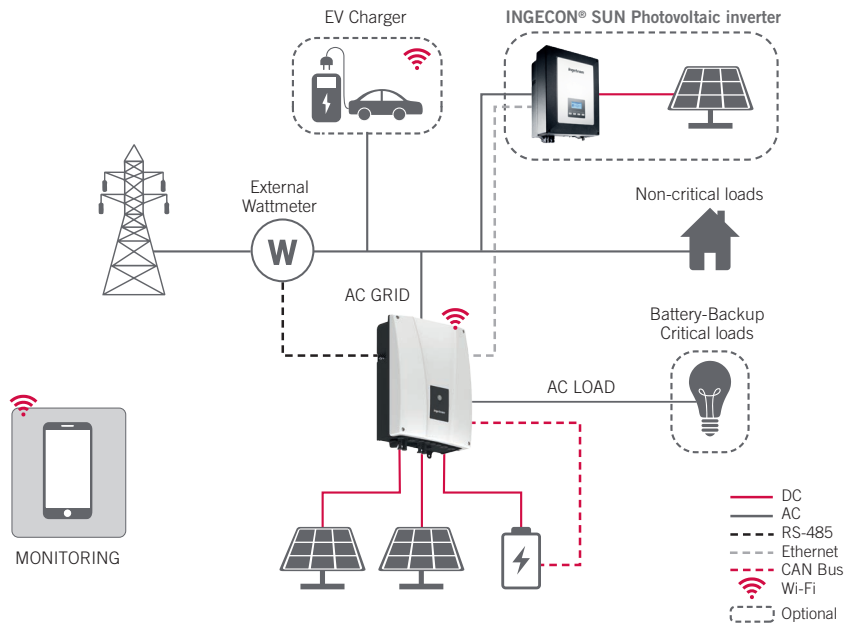


STAND-ALONE MODE

The INGECON® SUN STORAGE 1Play TL M inverter generates a stand-alone AC grid and acts as a grid manager, guaranteeing the correct balance between PV


generation, consumption and the storage system. It is equipped with a relay for the neutral-to-earth connection of the system loads in order to create a TT

stand-alone network. Moreover, the inverter permits the connection of an auxiliary generator, which can be started-up through a potential-free output for charging the batteries.

UPS DIAGRAM

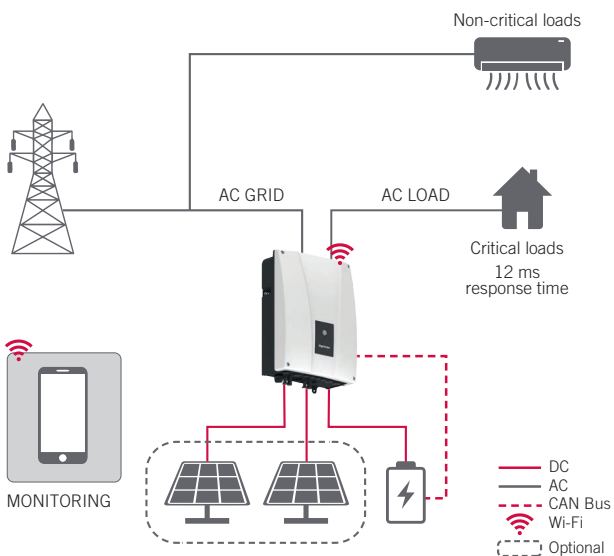

STAND-ALONE DIAGRAM

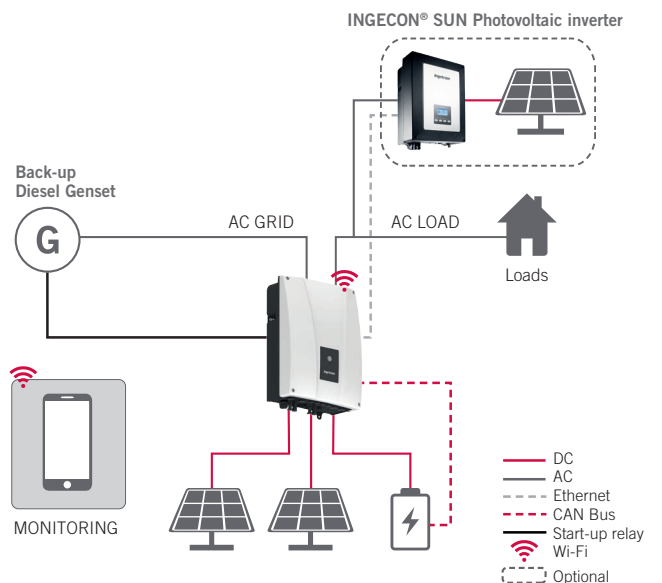


	3TL M	4.5TL M	6TL M
<b>Battery input (DC)</b>			
Voltage range <sup>(1)</sup>	40 ~ 460 V		
Maximum charge / discharge current	66 A		
Type of battery	Lead-acid, ion-lithium (LG, BYD, Pylontech...) <sup>(2)</sup>		
Communication with ion-lithium batteries	CAN Bus 2.0		
<b>PV input (DC)</b>			
PV array maximum power	11.5 kWp		
MPP voltage range	80 ~ 480 V		
Operation voltage range	80 ~ 540 V		
Maximum input voltage <sup>(3)</sup>	550 V		
Maximum input current (input 1 / input 2) <sup>(4)</sup>	13.5 A / 13.5 A		
Shortcircuit current (input 1 / input 2)	18 A / 18 A		
Number of MPPTs	2		
Number of inputs (input 1 / input 2)	1 / 1		
<b>Grid input (AC)</b>			
Rated voltage	230 V		
Voltage range	172 ~ 264 V		
Nominal Frequency	50 / 60 Hz		
Frequency range	40 ~ 70 Hz		
Network type	TT / TN		
Rated power	3 kW	4.5 kW	6 kW
Max. temperature for rated power	40 °C		
Rated current	13 Arms	20 Arms	26 Arms
Power factor	0 ~ 1		
<b>Critical load output (AC)</b>			
Max. power (25 °C) 30 min, 2 min, 3 s <sup>(5)</sup>	6,400 / 6,900 / 7,900 W		
Rated current	13 Arms	20 Arms	26 Arms
Rated voltage <sup>(6)</sup>	220 ~ 240 V		
Rated frequency <sup>(6)</sup>	50 / 60 Hz		
Power factor	-0.8 ~ 1 ~ 0.8		
Back-up function response time	12 ms		
<b>Features</b>			
Maximum efficiency	95.5%	96%	96%
Euroefficiency	95.1%	95.2%	95.2%
<b>Cooling system</b>			
Cooling system	Forced ventilation		
Air flow	45 m³/h		
Consumption in stand-by mode	< 10 W		
Operating temperature	-20 ~ +65 °C		
Relative humidity (non-condensing)	4 ~ 100 %		
Protection class	IP65		
Maximum altitude	2,000 m		
Marking	CE		
EMC and safety regulations	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN62109-2, AS62040.1, FCC Part 15		
Grid connection standards	DIN V VDE V 0126-1-1, EN 50438, CEI 0-21, VDE-AR-N4105:2011-08, G59/3, G83/2, AS4777.2:2015, IEC 62116, IEC 61727, UNE 206007-1:2013, UNE 206006:2011, UNE 217001 IN:2015, NRS097-2-1, ABNT NBR 16149, ABNT NBR 16150, South African Grid code, P.O.12.2, G99, EN 50549-1		

**Notes:** <sup>(1)</sup> The maximum power supplied by the battery shall be the battery voltage multiplied by the maximum discharge current <sup>(2)</sup> Consult the Ingeteam website for a list of compatible batteries <sup>(3)</sup> Never exceed. Consider the voltage increase of the panels 'Voc' at low temperatures <sup>(4)</sup> For parallel connected PV inputs, the total maximum current would be 27 A <sup>(5)</sup> In stand-alone mode, these powers are only available if the power of the batteries added to the PV power reaches these values <sup>(6)</sup> Configurable voltage and frequency.

**Weight and dimensions (mm)**



**AC power in relation to battery voltage (with no PV power)**

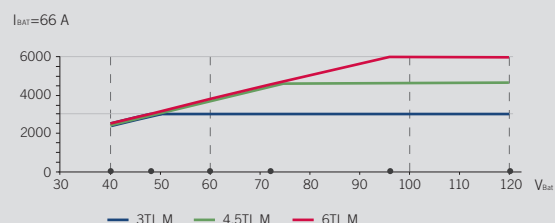



# Ingeteam

**Ingeteam Power Technology, S.A.**  
Avda. Ciudad de la Innovación, 13  
31621 Sarriguren (Navarra) - Spain  
Tel.: +34 948 288 000  
Fax: +34 948 288 001  
e-mail: solar.energy@ingeteam.com

**Ingeteam S.r.l.**  
Via Emilia Ponente, 232  
48014 Castel Bolognese (RA) - Italy  
Tel.: +39 0546 651 490  
Fax: +39 054 665 5391  
e-mail: italia.energy@ingeteam.com

**Ingeteam SAS**  
La Naurouze B - 140 rue Carmin  
31670 Labège - France  
Tel.: +33 (0)5 61 25 00 00  
Fax: +33 (0)5 61 25 00 11  
e-mail: france@ingeteam.com

**Ingeteam INC.**  
3550 W. Canal St.  
Milwaukee, WI 53208 - USA  
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190  
Fax: +1 (414) 342 0736  
e-mail: solar.us@ingeteam.com

**Ingeteam, a.s.**  
Technologická 371/1  
70800 Ostrava - Pustkovec  
Czech Republic  
Tel.: +420 59 747 6800  
Fax: +420 59 732 6899  
e-mail: czech@ingeteam.com

**Ingeteam Shanghai, Co. Ltd.**  
Shanghai Trade Square, 1105  
188 Si Ping Road  
200086 Shanghai - P.R. China  
Tel.: +86 21 65 07 76 36  
Fax: +86 21 65 07 76 38  
e-mail: shanghai@ingeteam.com

**Ingeteam, S.A. de C.V.**  
Leibnitz Ext 13 Int 1102, Colonia Anzures  
11590 - Miguel Hidalgo  
Ciudad de México - Mexico  
Tel.: +52 81 8311 4858  
Fax: +52 81 8311 4859  
e-mail: northamerica@ingeteam.com

**Ingeteam Ltda.**  
Rua Estácio de Sá, 560  
Jd. Santa Genebra  
13080-010 Campinas/SP - Brazil  
Tel.: +55 19 3037 3773  
e-mail: brazil@ingeteam.com

**Ingeteam Pty Ltd.**  
Unit 2 Alphen Square South  
16th Road, Randjiespark  
Midrand 1682 - South Africa  
Tel.: +2711 314 3190  
Fax: +2711 314 2420  
e-mail: southafrica@ingeteam.com

**Ingeteam SpA**  
Los militares 5890, Torre A, oficina 401  
7560742 - Las Condes  
Santiago de Chile - Chile  
Tel.: +56 2 29574531  
e-mail: chile@ingeteam.com

**Ingeteam Power Technology India Pvt. Ltd.**  
2nd Floor, 431  
Udyog Vihar, Phase III  
122016 Gurgaon (Haryana) - India  
Tel.: +91 124 420 6491-5  
Fax: +91 124 420 6493  
e-mail: india@ingeteam.com

**Ingeteam Sp. z o.o.**  
Ul. Koszykowa 60/62 m 39  
00-673 Warszawa - Poland  
Tel.: +48 22 821 9930  
Fax: +48 22 821 9931  
e-mail: polska@ingeteam.com

**Ingeteam Australia Pty Ltd.**  
iAccelerate Centre, Building 239  
Innovation Campus, Squires Way  
North Wollongong, NSW 2500 - Australia  
Tel.: +61 429 111 190  
e-mail: australia@ingeteam.com

**Ingeteam Panama S.A.**  
Av. Manuel Espinosa Batista,  
Ed. Torre Internacional  
Business Center, Apto./Local 407  
Urb.C45 Bella Vista  
Bella Vista - Panama  
Tel.: +50 761 329 467

**Ingeteam Service S.R.L.**  
Bucuresti, Sector 2,  
Bulevardul Dimitrie Pompeiu Nr 5-7  
Cladirea Hermes Business  
Campus 1, Birou 236, Etaj 2  
Romania  
Tel.: +40 728 993 202

**Ingeteam Philippines Inc.**  
Office 2, Unit 330, Milelong Bldg.  
Amorsolo St. corner Rufino St.  
1230 Makati  
Gran Manila - Philippines  
Tel.: +63 0917 677 6039

**Ingeteam Power Technology, S.A.**  
Level 1, Al Bateen Tower C6 Bainunah  
ADIB Building, Street 34  
PO BOX 30010 - Abu Dhabi  
United Arab Emirates  
Tel.: +971 50 125 8244

**Ingeteam Vietnam Ltd.**  
Spaces - 28A Tran Hung Dao Street  
Phan Chu Trinh Ward  
Hoan Kiem District  
Ha Noi City - Vietnam  
Tel.: +84 24 71014057  
e-mail: vietnam@ingeteam.com

**Ingeteam Uruguay, S.A.**  
Avenida 18 de Julio, 1474, Piso 12  
11200, Montevideo - Uruguay  
Tel.: +598 934 92064