


# TSS65TN

6" Mono c-Si Solar Cell

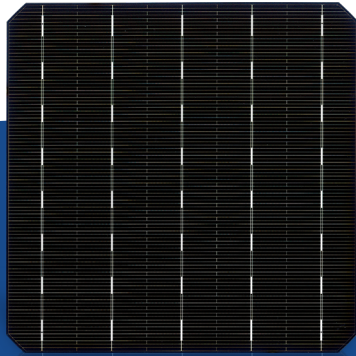

## Physical Characteristics

**Dimensions** 156.75mm X 156.75mm±0.25mm  
Diagonal: 210mm

**Thickness(Si)** 180 μm±20 μm, 200 μm ±30 μm

**Front(-)** Alkaline texturized surface with silicon nitride anti-reflecting coating

Color: Dark Blue, Blue, Sky Blue

5 X 0.8 mm ±0.1 mm wide bus bars

Distance between bus bars : 31.2 mm

**Back(+)** Aluminum back surface field

5x4 soldering pads, 1.3 mm±0.15 mm wide bus bars


Distance between bus bars : 31.2 mm

## Features

- High Cell-To- Module ratio through precise cell conversion efficiency sorting, classified efficiency grade by both minimum power and current.
- Excellent electrical long-term stability and reliability by using of best raw materials and through strict quality inspection control.
- Low breakage rate by using high qualified and stable wafers.
- High quality homogeneous appearance by sorting into defined color classes.
- 100% screened for reverse current and shunt resistance.
- Excellent solderability through high quality conductive materials and regular monitor soldering properties.

## Quality Control and Professional Service

- Regular calibration of test equipment using Fraunhofer ISE reference cell.
- Environmental friendly due to REACH-SVHC and RoHS compliances.
- Professional on-site service and support for module certification.
- Regular light source AAA class calibration for stable conversion efficiency.
- Lowest LID by periodic monitoring and superior wafer incoming control.

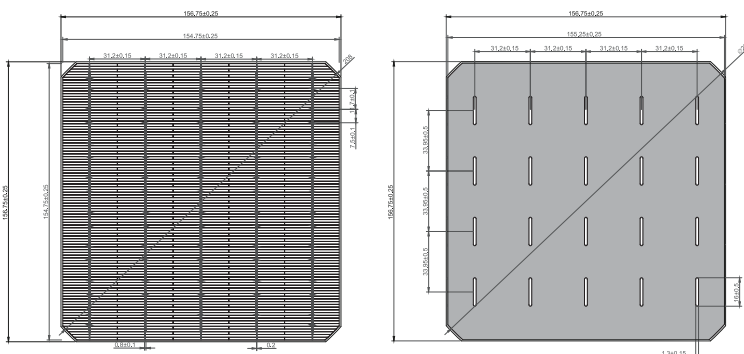

## Electrical Characteristics

Efficiency Code		202	201	200	199	198	197	196	194	192	190	188
Efficiency	Eff(%)	20.20	20.10	20.00	19.90	19.80	19.70	19.60	19.40	19.20	19.00	18.80
Power	Pmpp(W)	4.94	4.91	4.89	4.86	4.84	4.81	4.79	4.74	4.69	4.64	4.59
Max. Power Current	Impp(A)	8.853	8.848	8.839	8.818	8.793	8.769	8.732	8.689	8.661	8.632	8.602
Short Circuit Current	Isc(A)	9.359	9.346	9.336	9.313	9.289	9.267	9.243	9.199	9.179	9.159	9.089
Max. Power Voltage	Vmpp(V)	0.557	0.555	0.553	0.551	0.550	0.549	0.548	0.546	0.542	0.538	0.534
Open Circuit Voltage	Voc(V)	0.649	0.646	0.644	0.642	0.641	0.640	0.640	0.637	0.633	0.626	0.624

Standard test condition: AM1.5, 1000W/m<sup>2</sup>, 25°C  
Average accuracy of all tests is +/-1.5% rel.

# TSS65TN

## 6" Mono c-Si Solar Cell

### Temperature Coefficients

Current Temperature Coefficient	$\alpha(I_{SC})$	0.05%/K
Voltage Temperature Coefficient	$\beta(V_{OC})$	-0.33%/K
Power Temperature Coefficient	$\gamma(P_{max})$	-0.42%/K

Standard test condition: AM1.5, 1000W/m<sup>2</sup>, 25°C

### Processing Recommendations

#### Solder Joint

Copper ribbons coated with 15~25µm:  
62%Sn/36%Pb/2%Ag

Standard test condition: AM1.5, 1000W/m<sup>2</sup>, 25°C

#### Solderability

##### Peel Strength Minimum

> 1.25 N/mm


Soldering results may differ due to different flux, ribbons, soldering methods, and parameters.

### Qualifications and Certificates




RoHS Compliance  
SVHC tested


### Typical Current-Voltage Curve

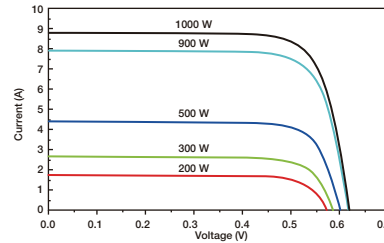

### Typical Spectral Response

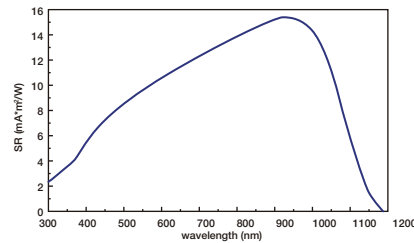


### Typical IV-Power Curve

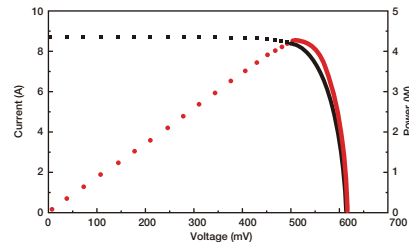


- \* All data measured under standard testing condition (STC): 1000 W/m<sup>2</sup>, AM 1.5, 25 °C.
- \* All figures bear ±2% tolerance.
- \* Reference cell calibrated by the Fraunhofer ISE in Freiburg.

### Calculated Temperature Coefficients


Short Circuit Current  $K(I_{SC})=(4.34 \pm 0.57) \text{ mA} / \text{K}$   
 $K(I_{SC})=(0.0494 \pm 0.0065) \% / \text{K}$

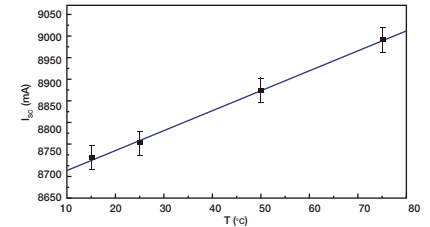

Open Circuit Voltage  $TK(V_{OC})=(-2.063 \pm 0.037) \text{ mV} / \text{K}$   
 $TK(V_{OC})=(-0.3321 \pm 0.0059) \% / \text{K}$

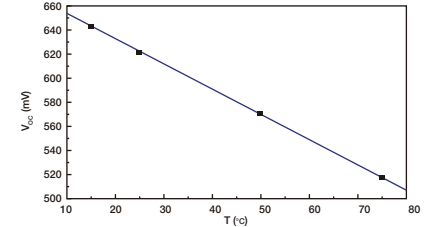

Power  $TK(P_{max})=(-17.71 \pm 0.65) \text{ mW} / \text{K}$   
 $TK(P_{max})=(-0.419 \pm 0.015) \% / \text{K}$

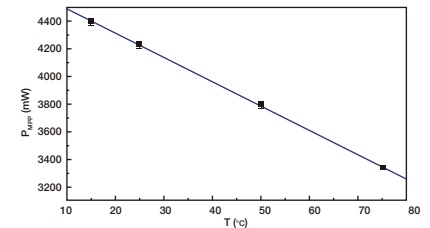

### TSEC Corporation

#### Taipei Headquarters

8F, No.225, Sec. 3, Beixin Rd., Xindian Dist.,  
New Taipei City 23143, Taiwan, R.O.C

t 886 2 2912 2199 f 886 2 2917 5399 m sales@tsecpv.com

#### Hsinchu Plant

No.85, Guangfu N. Rd., Hukou Township, Hsinchu County 30351,  
Taiwan, R.O.C. (Hsinchu Industrial Park)

t 886 3 696 0707 f 886 3 696 0708