
Model	GTB1200
Input Data (DC, PV)	
Number of Input MC4 Connector	4 sets
MPPT Voltage Range	22V-48V
Operation Voltage Range	20V-50V
Maximum Input Voltage	52V
Startup Voltage	18V
Maximum Input Power	1200W
Maximum input Current	15A*2
Output Data(AC)	120//0.220//
Single-Phase Grid Type	120V&230V
Rated Output Power	1200W
Maximum Output Power	1200W
Nominal Output Current	@120VAC:5A/@230VAC:2.6A
Nominal Output Voltage	120VAC /230VAC
Default Output Voltage Range	@120VAC:90V-160V /@230VAC:190V-270V
Nominal Output Frequency	50Hz / 60Hz
Default Output Frequency Range Power Factor	@50Hz:48Hz-51Hz/@60Hz:58Hz-61Hz >0.99%
Total Harmonic Distortion	>0.99% THD <5%
Maximum Units per Branch	@120VAC:2units /@230VAC: 4units
	@120VAC.201103/@230VAC.401103
Efficiency	
Peak Efficiency	95%
Nominal MPPT Efficiency	99.5%
Night Power Consumption	<1w
Mechanical Data	
Operating Ambient Temperature Range	-40℃ to +65℃
Storage Temperature Range	-40°C to +85C
Dimensions(W*H *D)	365mmx230mm x40mm
	(not include connectors and cable)
Weight	3.5kg
Max Current of AC Bus Cable	20A
Waterproof Grade	IP65
Cooling Mode	Natural Convection- No Fans
Other Features	
Communication	WIFI(Cloud monitoring)
Transformer Design	High Frequency Transformers, Galvanically Isolated
Integrated Ground	Equipment ground is provided by the PE in the AC cable.
Integrated Ground	No additional ground is required.
	Isolated Island Protection, Voltage Protection,
Protection Functions	Frequency Protection,
	Temperature Protection, Current Protection, etc.
	EN IEC61000-3-2:2019+A1:2021,
Design Compliance	EN 61000-3-3:2013+A1:2019+A2:2021,
5 .	EN IEC55014-2:2021,EN IEC55014-2:2021,

## **Installation Schematic**


## GTB1200 Micro inverter 230VAC Single-Phase230V

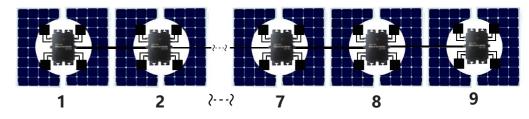

1.GTB1200 @Single-Phase 230V gridMaximum 10 units GTB1200Microinverters per branch.
2.The max DC input power of each inverter is 1200W(the PV module max output power is 2x30W)
3. The VOC of PV modules should not be greater than the max DC input voltage of Microinverters.

ATTENTION: If you combine inverters with different power ratings (e.g. GTB450 with GTB800), the most powerful one must be connected to the mains, otherwise there may be a loss of power

## Wiring Schematic

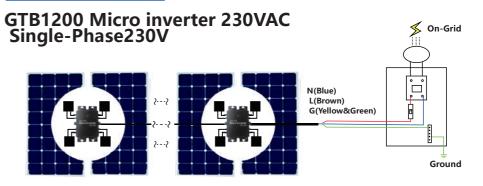

## GTB1200 Micro inverter 230VAC 3-Phase 380V(Single-Phase 230V)

