#### **Installation Schematic**

### Input Data (DC, PV)

Number of Input MC4 Connector	2 sets	
MPPT Voltage Range	22V-48V	
Operation Voltage Range	20V-50V	
Maximum Input Voltage	52V	
Startup Voltage	22V	
Maximum Input Power	800W	
Maximum input Current	12A*2	

### Output Data(AC)

Single-Phase Grid Type	120V&230V	
Rated Output Power	800W	
Maximum Output Power	800W	
Nominal Output Current	@120VAC:5A/@230VAC:2.6A	
Nominal Output Voltage	120VAC /230VAC	
Default Output Voltage Range	@120VAC:80V-160V /@230VAC:180V-270V	
Nominal Output Frequency	50Hz / 60Hz	
Default Output Frequency Range	@50Hz:48Hz-51Hz/@60Hz:58Hz-61Hz	
Power Factor	>0.99%	
Total Harmonic Distortion	THD <5%	
Maximum Units per Branch	@120VAC·5units /@230VAC· 10units	

#### Efficiency


Emelency	
Peak Efficiency 95%	
Nominal MPPT Efficiency 99.5%	
Night Power Consumption <1w	

#### Mechanical Data

Operating Ambient Temperature Range	-40°C to +65°C
Storage Temperature Range	-40°C to +85C
Dimensions(W*H *D)	230mmx200mm x 40mm
	(not include connectors and cable)
Weight	2.45kg
Max Current of AC Bus Cable	20A
Waterproof Grade	IP65

	- 9 -	
	Max Current of AC Bus Cable	20A
	Waterproof Grade	IP65
	Cooling Mode	Natural Convection- No Fans
	Other Features	
	Communication	WIFI(Cloud monitoring)
	Transformer Design	High Frequency Transformers, Galvanically Isolated
	Interreted Craund	Equipment ground is provided by the PE in the AC cable.
	Integrated Ground	No additional ground is required.
		Isolated Island Protection, Voltage Protection,
	Protection Functions	Frequency Protection,
		Temperature Protection, Current Protection, etc.
		EN IEC61000-3-2:2019+A1:2021,
	Design Compliance	EN 61000-3-3:2013+A1:2019+A2:2021,
		EN IEC55014-2:2021,EN IEC55014-2:2021,

## Single phase connection method of micro inverter

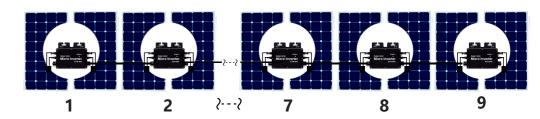


1.GTB800 @Single-Phase 230V gridMaximum 8 units GTB800 Microinverters per branch.

2.The max DC input power of each inverter is 800W(the PV module max output power is 2x400W)


3. The VOC of PV modules should not be greater than the max DC input voltage of Microinverters.

# **Wiring Schematic**

## Single phase connection method of micro inverter

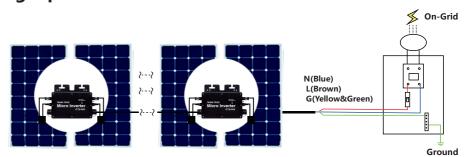

### Three phase connection method of GTB800 micro inverter

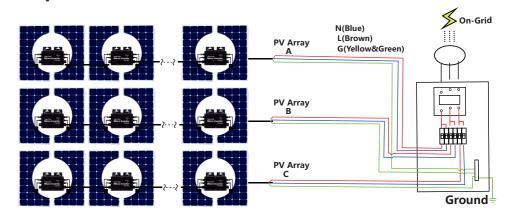

2-11 3-11