


URE

United Renewable Energy Co., Ltd.

Super18 Series

NP6W

Multicrystalline Solar Cell

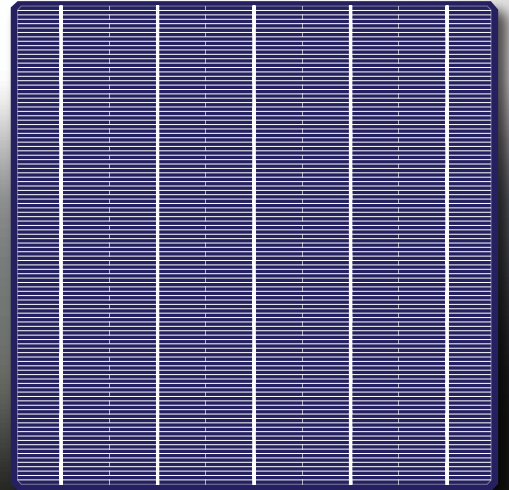

Features

- High efficiency solar cells with an isotropically etched surface
- Silicon nitride anti-reflection coating
- Silver front contact bars and full surface aluminum back contact field

Performance and Quality

- Proper handling from incoming inspection through production, outgoing inspection and packaging
- 100% checked for reverse current and visual appearance
- Calibrated against Fraunhofer ISE
- RoHS compliance
- **100% PID Resistance**



Packaging

- Minimize the risk of broken cells with special design
- Label with product information

Physical Characteristics

Dimension	157 mm x 157 mm \pm 0.25 mm
Cell's Thickness (si)	190 μ m \pm 30 μ m
Front Side (-)	Silicon nitride anti-reflection coating 0.7 mm silver busbar
Back Side (+)	Back surface field and full surface aluminum 1.5 mm (silver) discontinuous soldering pads

Cell Layout

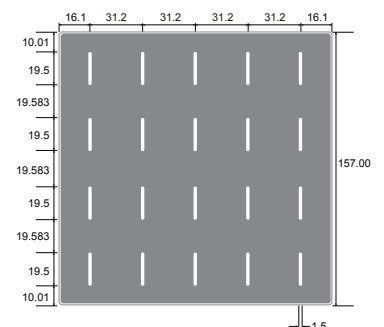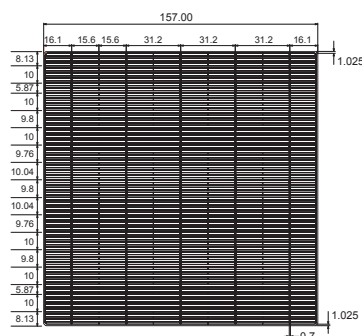

Multicrystalline Solar Cell

NP6W



Electrical Characteristics

Class	Efficiency Range (%)	Rated Power (Wp)	*Maximum Power Current (A)	*Short Circuit Current (A)	*Maximum Power Voltage (V)	*Open Circuit Voltage (V)
180	18.0-18.1	4.436	8.302	8.798	0.538	0.634
182	18.2-18.3	4.486	8.338	8.838	0.540	0.636
183	18.3-18.4	4.510	8.371	8.868	0.541	0.637
184	18.4-18.5	4.535	8.386	8.887	0.543	0.639
185	18.5-18.6	4.560	8.405	8.910	0.544	0.641
186	18.6-18.7	4.584	8.426	8.933	0.546	0.642
187	18.7-18.8	4.609	8.446	8.956	0.547	0.643
188	18.8-18.9	4.634	8.467	8.979	0.548	0.645
189	18.9-19.0	4.658	8.492	9.008	0.550	0.646

Test condition : 1000 W / m², AM 1.5, 25°C Power measuring tolerance: ±1.5% rel.


Temperature coefficients

Current (%/K)	0.0451
Voltage (%/K)	-0.3045
Power (%/K)	-0.3614


Light Intensity Dependence

Intensity [W/m ²]	Vmpp	I _{mp}
1000	1.000	1.000
900	0.996	0.903
500	0.972	0.499
300	0.948	0.298
200	0.928	0.198

IV-Curve

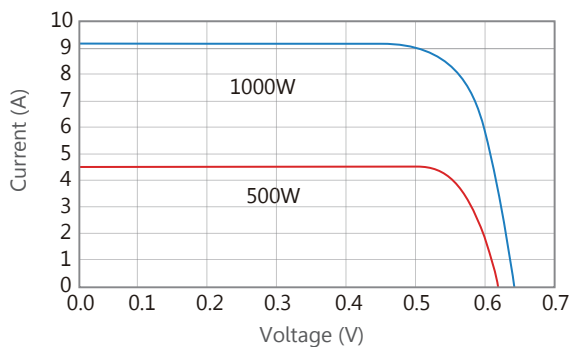

Spectral Response

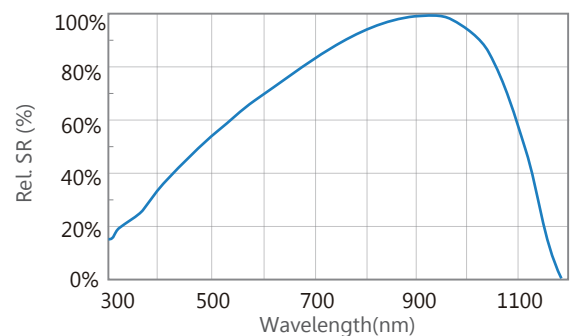

United Renewable Energy Co., Ltd.



Hsinchu HQ

No.7, Li-Hsin 3rd Rd., Hsinchu Science Park, Hsinchu,
30078, Taiwan
Tel: +886-3-5780011 Fax: +886-3-5781255

Taipei Office

9F., No. 295, Tiding Blvd. Sec. 2, Taipei,
11493, Taiwan
Tel: +886-2-26562000 Fax: +886-2-26560593