

Add: No.6, Chuangye 3rd Road, West Area, Free Trade Zone, Ningbo, Zhejiang, China 315800

Tel: +86-574-8681 2925/ 8681 2578 Fax: +86-574-8681 2905

E-mail: info@glenergy.cn Website: www.glenergy.cn

# SOLAR CONTROLLER GLC12(24)15CY

### **DESCRIPTION:**

A solar controller is a small box consisting of solid state circuitry that is placed between a solar panel and a battery. Its function is to regulate the amount of charge coming from the panel that flows into the deep cycle battery bank in order to avoid the batteries being overcharged. A controller can also provide a direct connection to appliances, while continuing to recharge the battery.




#### **♦ FEATURES:**



- PWM Charging: high charge efficiency and greatly extends the battery life.
- MOSFET as Electronic Switch: makes the controller a longer life.
- •Protection Functions: makes the system be more secure and reliable, includes overcharge protection, deep discharge protection, reverse polarity protection of module/battery/load, short circuit protection of module/load, open circuit protection without battery, over-temperature protection, battery overvoltage shutdown.
- •Sufficient Design Margin: maximum capacity exceeds 20% as the rated current/power, which makes the system more secure.

#### **APPEARANCE:**

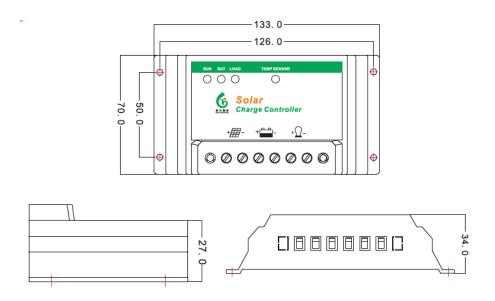

## **◆TECHNICAL PARAMETERS:**

Model		GLC12(24)15CY
	Rated Voltage	12V/24V
System	Rated Current	15A
Specifications	Float Voltage	13.8V/27.6V
	Idle Draw	≤13mA
Input	Max Current On Charging	15A
	Max Open Voltage	30V/50V
Output	Max Load Current	15A
	Over charge	14.6V±0.2V/29.2V±0.2V
	Over discharge Protection(V)	10.8V±0.2V/21.6V±0.2V
Protection	Over discharge Resumption(V)	12.4V±0.2V/24.8V±0.2V
Function	Over-voltage Protection(V)	17V/34V
	Over-voltage	15V/30V
	Reverse Polarity	Yes
	Short Circuit	Yes
Other Data	Working Temperature	-20~70°C
	Storage Temperature	-35~80°C
	Temperature Compensation	-4mV/2V/°C
	Display	LED
	Operating Altitude(m)	≤5000m
	Product Size	133mm×70mm×34mm
	Packing Size	137mm×74mm×37mm
	Product Weight	160g
	Packing Weight	175g

## **♦INSTALLATION DIAGRAM:**

