

# Photovoltaic Modules

## Sovello Pure Power T Series

High Voltage Configuration

Made in Germany

Sovello Pure Power solar modules are produced in Germany according to the highest quality standards in one of the world's most modern, fully integrated solar factories. Our modules are remarkably efficient, easy to operate, and are manufactured in a particularly environmentally friendly way thanks to the STRING RIBBON™ wafers, which feature excellent specific power output and smallest carbon footprint.

- › Best energy efficiency with a high level of specific energy yield
- › Particularly narrow output tolerance with at least 100% guaranteed nominal output
- › Easy installation thanks to torsion-resistant, double-walled module frames and low total module weight
- › Greater security thanks to a 25-year linear performance guarantee from 99% to 85% with performance reduction by no more than 0.6% annually; in addition, there is a 10-year guarantee on the workmanship
- › Most sustainable module – quickest energy payback compared to other products of its kind



## Electrical Nominal Values

### Standard Test Conditions (STC)<sup>1</sup>

|   |   | SV-T-190                          | SV-T-195 | SV-T-200 | SV-T-205 |
|---|---|-----------------------------------|----------|----------|----------|
|   |   | <b>High Voltage Configuration</b> |          |          |          |
| Nominal Power <sup>2</sup>              | W | 190                               | 195      | 200      | 205      |
| Output Tolerance                        | W | 0/+5                              | 0/+5     | 0/+5     | 0/+5     |
| P <sub>mpp</sub> <sup>3</sup> , max     | W | 194.9                             | 199.9    | 204.9    | 209.9    |
| P <sub>mpp</sub> <sup>3</sup> , min     | W | 190.0                             | 195.0    | 200.0    | 205.0    |
| P <sub>mpp</sub> <sup>3</sup> , Average | W | 192.5                             | 197.5    | 202.5    | 207.5    |
| Module Efficiency                       | % | 12.9                              | 13.2     | 13.6     | 13.9     |
| U <sub>mpp</sub> <sup>3</sup>           | V | 26.9                              | 27.3     | 27.7     | 28.1     |
| I <sub>mpp</sub> <sup>3</sup>           | A | 7.16                              | 7.24     | 7.31     | 7.37     |
| U <sub>oc</sub> <sup>3</sup>            | V | 32.9                              | 33.0     | 33.1     | 33.2     |
| I <sub>sc</sub> <sup>3</sup>            | A | 8.08                              | 8.20     | 8.31     | 8.43     |
| FF Fill factor                          | % | 72.5                              | 73.1     | 73.7     | 74.3     |

### Nominal Operating Cells Temperature Conditions (NOCT)<sup>4</sup>

| T NOCT           | °C | 45.2  | 45.2  | 45.2  | 45.2  |
|------------------|----|-------|-------|-------|-------|
| P <sub>max</sub> | W  | 140.6 | 144.3 | 148.0 | 151.6 |
| U <sub>mpp</sub> | V  | 24.6  | 24.9  | 25.3  | 25.6  |
| I <sub>mpp</sub> | A  | 5.70  | 5.77  | 5.85  | 5.92  |
| U <sub>oc</sub>  | V  | 30.3  | 30.4  | 30.5  | 30.6  |
| I <sub>sc</sub>  | A  | 6.55  | 6.64  | 6.74  | 6.83  |

<sup>1</sup> STC: 1,000 W/m<sup>2</sup> irradiance on module level, module temperature 25 °C and spectral distribution of irradiance acc. to Air Mass 1.5

<sup>2</sup> Power rating at standard test conditions (STC)

<sup>3</sup> Measurement tolerances STC: ± 3 % (P<sub>mpp</sub>); ± 10 % (I<sub>sc</sub>, U<sub>oc</sub>, I<sub>mpp</sub>, U<sub>mpp</sub>)

<sup>4</sup> NOCT: Equilibrium temperature at 800 W/m<sup>2</sup> irradiance on module level, air temperature 20 °C, wind velocity 1 m/s

### Temperature Coefficients

|                    |        |       |
|--------------------|--------|-------|
| g P <sub>mpp</sub> | (%/°C) | -0.45 |
| b U <sub>mpp</sub> | (%/°C) | -0.42 |
| a I <sub>mpp</sub> | (%/°C) | -0.03 |
| b U <sub>oc</sub>  | (%/°C) | -0.33 |
| a I <sub>sc</sub>  | (%/°C) | 0.06  |

### System Design

|                             |         |
|-----------------------------|---------|
| Maximum countercurrent flow | 18 A    |
| Maximum system voltage      | 1,000 V |

### Poor lighting conditions

In case of an irradiance of 200 W/m<sup>2</sup> and a module temperature of 25 °C, the reduction of the relative level of efficiency will be less than 4% with regard to STC conditions.


### Mechanical Stability

High level of guaranteed durability in wind and snow up to 5.4 kN/m<sup>2</sup>.

 ELECTRICAL EQUIPMENT  
CHECK WITH YOUR INSTALLER



## Mechanical Specifications

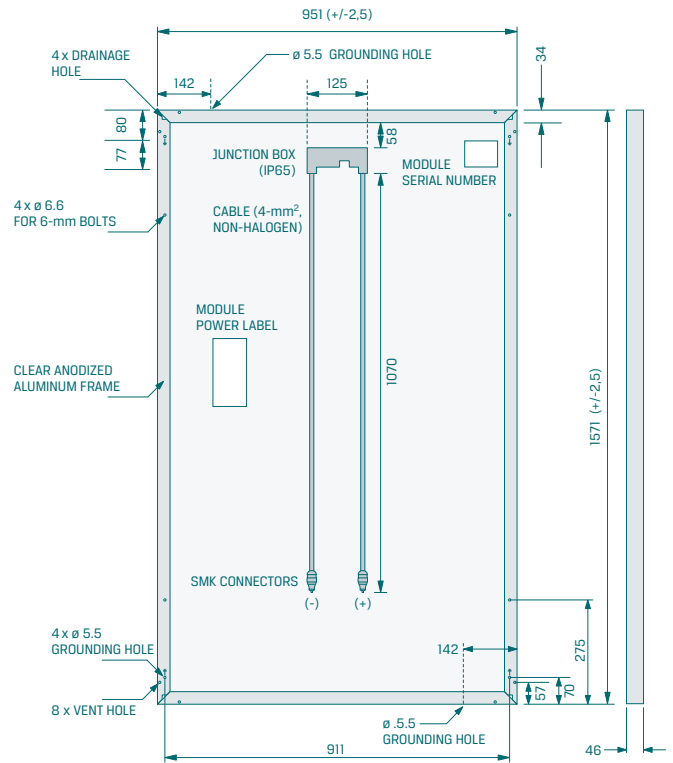

All dimensions in mm; module weight 17.4 kg.

This product was manufactured using the following materials: 108 polycrystalline silicon solar cells, anti-reflective tempered solar glass, EVA encapsulant, polymer back-skin, and a double-walled, anodized aluminum frame. The product packaging has been tested to Assurance Level 2 according to ASTM D4169. All specifications in this product data sheet conform to EN 50380. For more information on the approved installation and use of this product, please see the Sovello safety, installation, and operating manual.

Due to continuous innovation, research, and product improvement, the specifications in this product information sheet are subject to change without prior notice. No legal claims may be made based on this product data sheet. Sovello assumes no liability with regard to the use of the information found here or the consequences thereof.

### Partner

Sovello GmbH

Headquarters:  
Sonnenallee 14-30, 06766 Bitterfeld-Wolfen, Germany  
P +49-3494-6664-0 F +49-3494-6664-1011  
request@sovello.com  
www.sovello.com

Customer Service:  
Sonnenallee 14-30, 06766 Bitterfeld-Wolfen, Germany  
P +49-3494-6664-1555 F +49-3494-6664-1011  
customer-service@sovello.com

