



PV Module TITAN M6-36



High Efficiency PV Modules

Strengths

- Positive power tolerance
- High Efficiency Multi Crystalline Modules
- TUV Certifications:
 - EN IEC 61215 : 2005
 - EN IEC 61730-1 : 2004 / 2007
 - EN IEC 61730-2 : 2004 / 2007
- Withstands heavy loading due to snow & ice; Has higher safety margin for storm weather and gale winds

Product Guarantee : 5 years
Limited Power Warranty : 90% @ 12 Years
 80% @ 25 Years

Certifications



Typical Electrical Characteristics

Type	TITAN M6-36				
Max-Power	Pmp (W)	130	135	140	145
Power Tolerance	(W)	+0 to 4.9Wp or ±2.5%			
Max Power Voltage	Vmp(V)	17.45	17.75	18.05	18.35
Max Power Current	Imp (A)	7.46	7.62	7.77	7.91
Open Circuit Voltage	Voc (V)	21.70	21.99	22.24	22.42
Short Circuit Current	Isc (A)	8.12	8.26	8.43	8.52
Electrical parameters tolerance		±5%			
Max System Voltage	VDC	1000			
Number, type and arrangement of cells		36, Multi-Crystalline, 9 x 4 Matrix			
Cell Size		6" x 6" / 156 x 156 mm			
No. of By-pass Diodes		2			
Max. Series Fuse	(A)	15			
Pm Temperature Co-efficient (γ)	(%/°C)	-0.35			
Isc Temperature Co-efficient (α)	(%/°C)	+0.04			
Voc Temperature Co-efficient (β)	(%/°C)	-0.32			
NOCT at STC	(°C)	45±1			

Mechanical Characteristics

Junction Box		ZJRH
Type of connector		MC4
Dimensions (L x W x Th)	mm	1479 x 659 x 42
Weight	Kg	11.2
No. of Drain Holes in Frame		8
Glass Type and Thickness		3.2 mm Thick, Low iron, Tempered

Packing Configuration

Packing Configuration	23 Modules in each pallet
1 * 20 Ft	336 Modules
1 * 40 Ft STD/HQ	672 Modules


Absolute Ratings

Operating Temperature	(°C)	-40 ~ +85
Storage Temperature	(°C)	-40 ~ +85

NOTE: The data presented may change due to further improvements in the product.


PV Module TITAN M6-36

I-V Curves

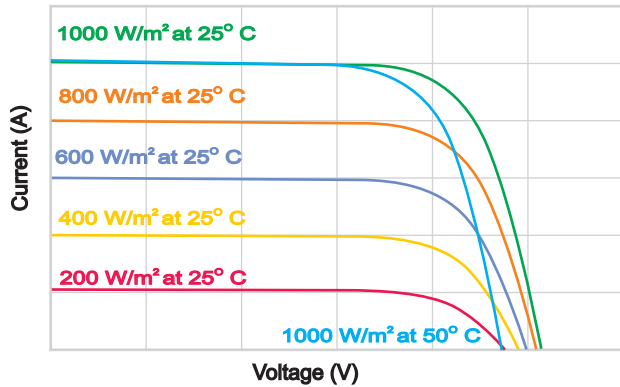

Current/voltage dependence on irradiance and module temperature. These I-V curves indicate the effect of temperature and light intensity on module Performance.

Dimensions

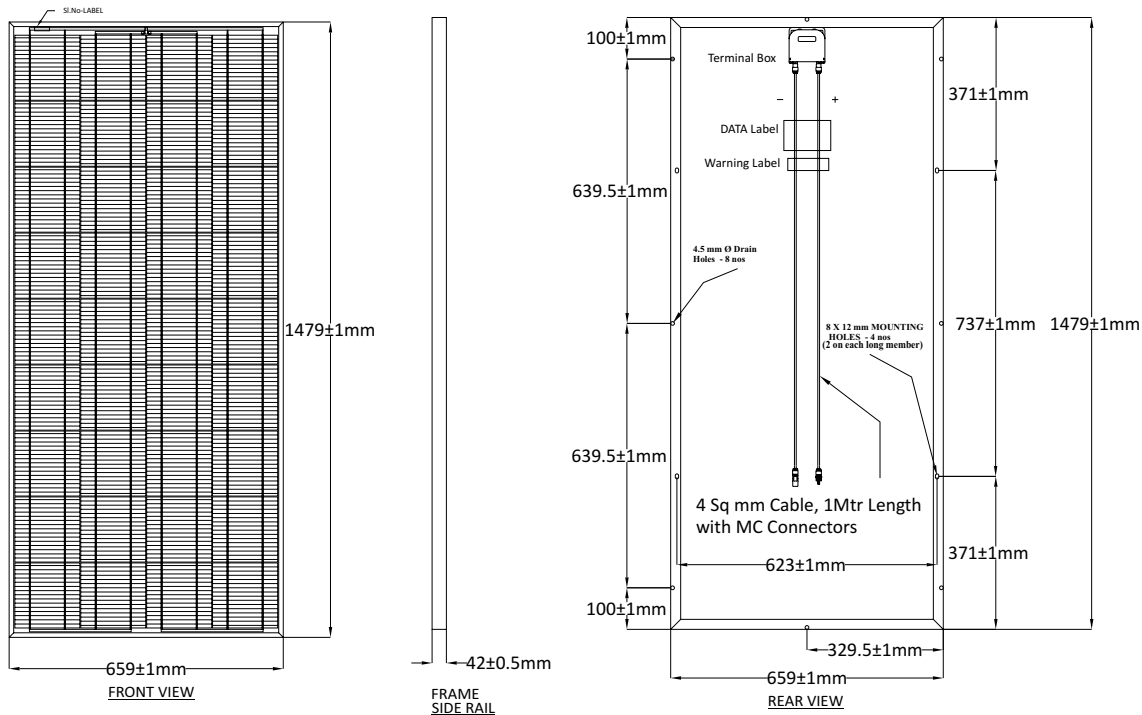

PV Module Products

M6-72 Family Series (285Wp to 130Wp) : M6-72, M6-60, M6-54 & M6-36 - Certified for IEC Standards

M6-60: Certified for UL (USA & Canada) Standard; M6-72: Certification for UL (USA & Canada) is in Progress

S6-60 Family Series (250Wp to 140Wp) : S6-60, S6-54 & S6-36 - Certified for IEC Standards

S6-60 - Certified for UL (USA & Canada) Standard

S6-72 (290Wp to 300Wp) : Certification for IEC & UL (USA & Canada) Standards is in progress

S5-96 Family Series (245Wp to 90Wp) : S5-96, S5-72, S5-60, S5-54 & S5-36 - Certified for IEC Standards



Corporate Office (India) :
TITAN Energy Systems Ltd,
 16, Aruna Enclave, Trimulgherry,
 Secunderabad – 500 015, INDIA
 Phone: +91 (0)40 27791085, 27790751
 Fax: +91 (0)40 27795629
 Email: info@titan-energy.com

Sales Office (Europe) :
TITAN Energy Systems Ltd,
 Basel, 4052
 Switzerland
 Phone: +41-6150-0052-9
 Email: info.eu@titan-energy.com