




Solar Module TITAN S5-96

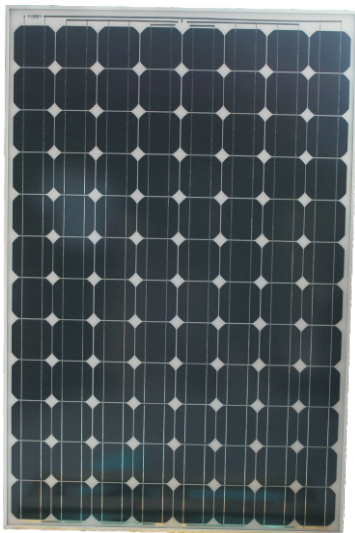

High Efficiency Solar Modules suitable for On Grid Applications

Strengths

- Positive power tolerance (-0 Wp / + 4.99 Wp)
- High Efficiency Mono Crystalline Cell
- Certified for performance as per IEC 61215 : 2005 by TUV Germany
- Certified for safety as per IEC 61730-2 by TUV Germany
- Certified for Mechanical Loads up to 5400 Pascal that withstand heavy accumulation of snow and ice

Product Guarantee : 5 years

Limited Power Warranty : 90% of 12 Years
80% of 25 Years

Certifications



Typical Electrical Characteristics

Type	TITAN S5-96			
Max-Power	Pmp (W)	235	240	245
Power Tolerance	(W)	-0 / + 4.99		
Max-Power Voltage	Vmp(V)	48.66	48.99	49.12
Max-Power Current	Imp (A)	4.83	4.90	4.99
Open Circuit Voltage	Voc (V)	59.81	59.90	60.10
Short Circuit Current	Isc (A)	5.20	5.25	5.29
Max-System Voltage	VDC	1000		
Number, type and arrangement of cells	96, Mono-Crystalline, 8 x 12 Matrix			
Cell Size	5" x 5" / 125 x 125 mm			
No. of By-pass Diodes	4			
Max. Series Fuse	(A)	12		
Pm Temperature Co-efficient	(%/C)	-0.41		
Isc Temperature Co-efficient	(%/C)	0.07		
Voc Temperature Co-efficient	(%/C)	-0.313		
NOCT – Nominal Operating Cell Temp	(°C)	45		

Mechanical Characteristics

Cable Type	Tyco / Lapp Kable		
Type of connector	Tyco / MC4		
Dimension	mm	1069 x 1614 x 42	
Weight	Kgs	20	
No. of Draining Holes in Frame	8		
Glass Type and Thickness	3.2 mm Thick, Low iron, Tempered		

Packing Configuration


Packing Configuration	23 Modules in each pallet		
1 * 20'	138 Modules		
1 * 40Ft STD	322 Modules		
1 * 40Ft HQ	644 Modules		

Absolute Ratings

Operating Temperature	(°C)	-40 ~ +85	
Storage Temperature	(°C)	-40 ~ +85	


Solar Module TITAN S5-96

I-V Curves

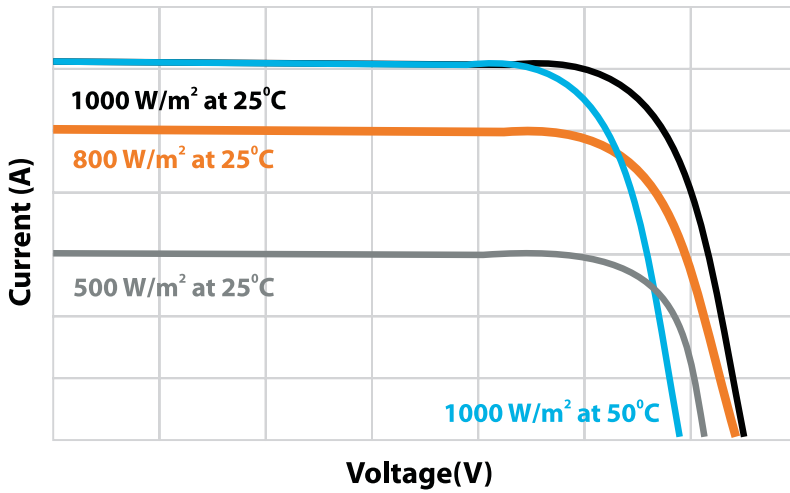

Current/voltage dependence on irradiance and module temperature.
This is only indicative showing effect of temperature and intensity on power

Dimensions

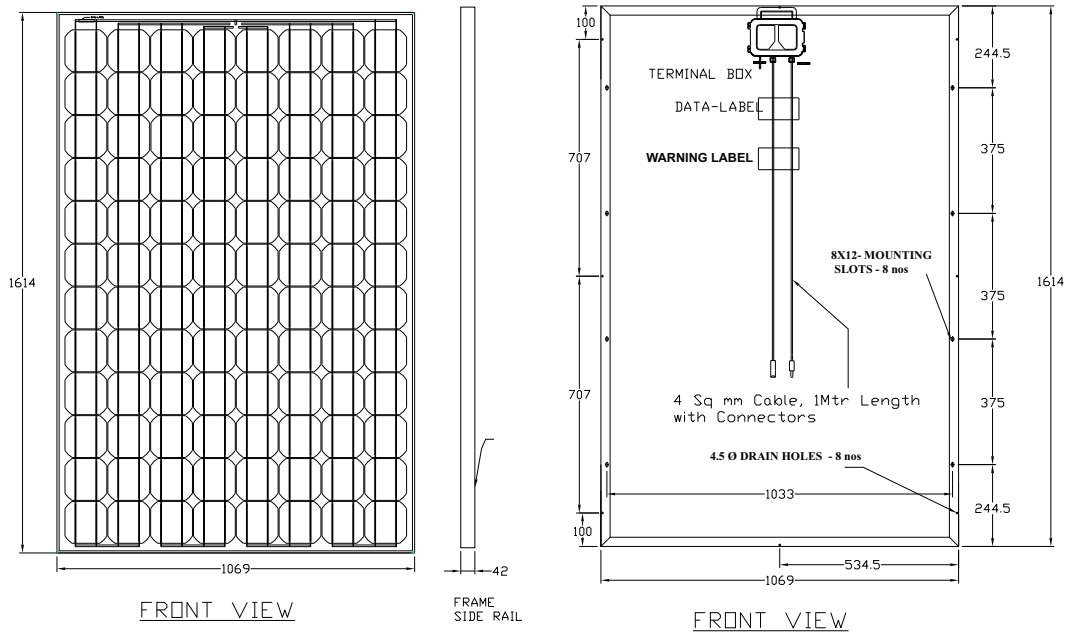

Corporate Office (India)
TITAN Energy Systems Ltd,
 16, Aruna Enclave, Trimulgherry,
 Secunderabad – 500 015, INDIA
 Phone: +91 (0)40 27791085, 27790751
 Fax: +91 (0)40 27795629
 Email: info@titan-energy.com

Sales Office (Europe) :
TITAN Energy Systems Ltd,
 Basel, 4052
 Switzerland
 Phone: +41-6150-0052-9
 Email: info.eu@titan-energy.com

Sales Office (USA) :
TITAN Energy Systems Ltd,
 1118 Ferment Avenue
 Los Altos, California , USA
 Phone: +1-650-714-1989
 Email: info.us@titan-energy.com