


Standard Module



GSS6 6 x10 Series 6" Cell Module (245, 250, 255, 265 Wp)

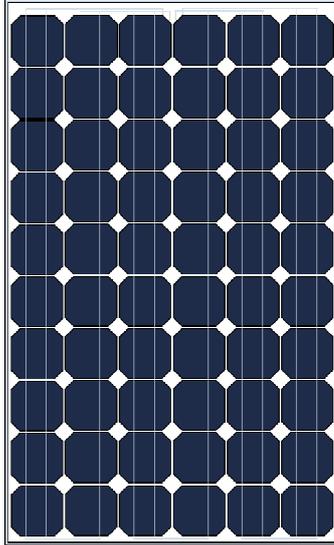

Features

- ✱ 60 presorted high efficient mono-crystalline silicon solar cells.
- ✱ Long term stability by quality control and exact tuning of components.
- ✱ Sorting limit of module classification to 0/+4.99 Watt.
- ✱ TUV mechanical load test certificate upon 5400 Pa.

Quality and safety

- ✱ 5 years material and workmanship warranty.
- ✱ 10 years of 90% and 25 years of 80% power output limited warranty.
- ✱ Rigorous quality control meeting the highest international standards: ISO 9001 and ISO 14001.
- ✱ Certificated by IEC 61215 & IEC 61730 standard and conformity to CE.



Electrical characteristics under standard test condition (STC) ¹					
Typical power (Pmax) ²	245W	250W	255W	260W	265W
Voltage at typical power (Vmp)	30.77V	30.91V	31.07V	31.24V	31.39V
Current at typical power (Imp)	7.96A	8.09A	8.21A	8.32A	8.44A
Open circuit voltage (Voc)	37.31V	37.41V	37.53V	37.64V	37.74V
Short circuit current (Isc)	8.56A	8.65A	8.77A	8.87A	8.97A
Module Efficiency	14.95%	15.26%	15.56%	15.87%	16.17%
Maximum system voltage	1000 V				
Fuse rating	15 A				
Application	DC 24 V system				
System cell	156mm*156mm Mono-crystalline silicon				
No. of cells and connections	60 PCS in series (6 × 10)				

1. STC: AM1.5, 1000 W/m², cell temperature of 25 °C.
2. Power tolerance at maximum power under STC condition = ± 3%.

Parameters of the thermal characteristics	
NOCT (Nominal Operating Cell Temperature)	47±2 °C
Temperature coefficient α of current Isc	0.063 %/°C
Temperature coefficient β of voltage Voc	-0.328 %/°C
Temperature coefficient γ of peak power Pmax	-0.412 %/°C

Absolute maximum ratings	
Operating temperature	-40 to +85 °C
Storage temperature	-40 to +85 °C



Mechanical characteristics		
Dimension (Length*Width*Thickness)	1652 mm * 992 mm * 40 mm	
Weight	Approx. 18.9 kg	
Packing configuration		
Size of pallet (carton)	1698 mm * 1114 mm * 105 mm	
Container size	20 ft.	40 ft.
Pallets per container	12	28
Pieces per container	300	700
Construction	High transmission low-iron tempered glass, 3.2 mm Encapsulates: EVA Frame : Clear anodized aluminum, AL6063-T5	
Junction box	IP65, weatherproof	

Bypass diodes	3 diodes to avoid power decreasing by shade
Output cable	4 mm ² cable with polarized weatherproof connectors Negative 1000 mm, Positive 1000 mm
Cable extraction force	>400 Newton
Connector	IP67

Performance at variable irradiance


- ☀ Module efficiency at 200 W/m², 25 °C is lower than that at STC by approximately 6.3% (relative).

I-V curves for 245W Module

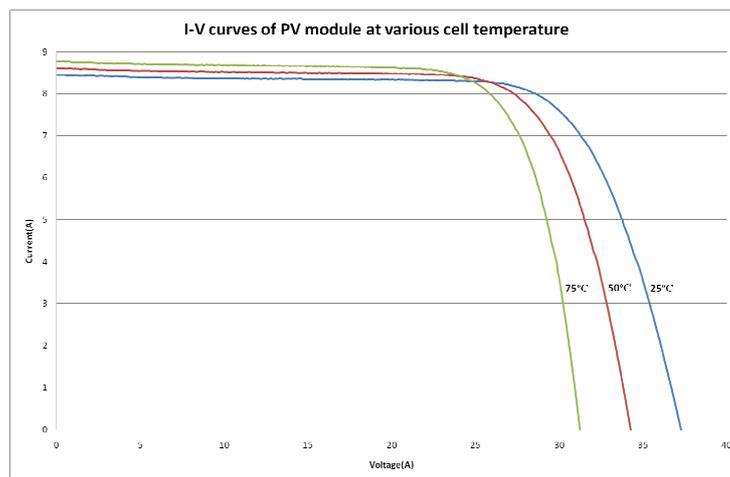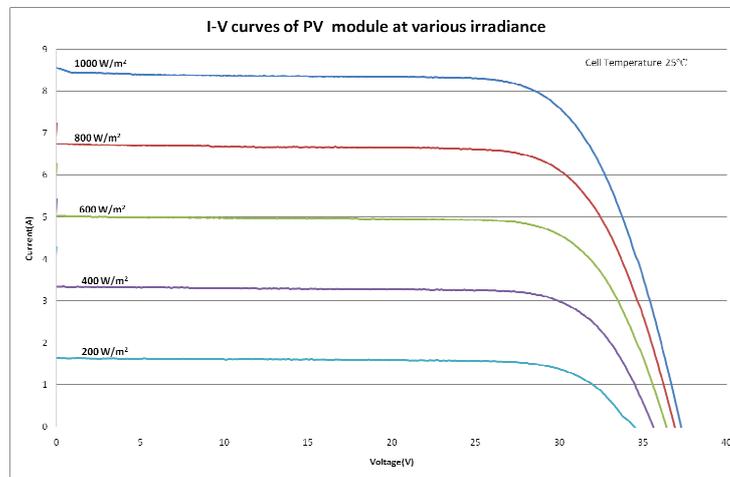

Module dimensions

Front View

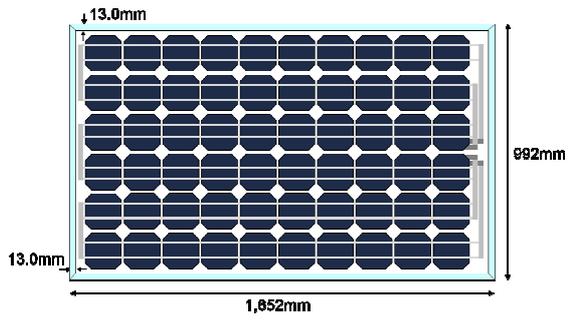

Side View



Back View

