



MULTI-CRYSTALLINE SOLAR MODULE
Enfoton 48E6+3bbxxxQC
POWER CLASSES 180 - 200



Enfoton Solar modules are designed and manufactured for long, reliable operation and high energy production under all climatic conditions. Top quality European materials, strict quality control procedures, excellent technical characteristics and Enfoton's proven expertise combine to ensure a high overall performance and consistently higher energy yields.

YOUR BENEFITS:

- POSITIVE PERFORMANCE SORTING
- PRODUCT WARRANTY
10 YEARS
- PERFORMANCE WARRANTY 1
10 YEARS WITH MAX. LOSS OF 10% ON POWER RATING
- PERFORMANCE WARRANTY 2
25 YEARS WITH MAX. LOSS OF 20% ON POWER RATING
- HIGHEST QUALITY COMPONENTS AND CONTINUOUS INCOMING QUALITY CONTROL (IQC)
- PROFESSIONAL CUSTOMER RELATIONSHIP MANAGEMENT
- CERTIFIED ACCORDING TO IEC EN 61215 FOR 5400 Pa
- CERTIFIED ACCORDING TO IEC EN 61730, SAFETY CLASS II IEC EN 61215



Electrical data (STC)

STC (Standard Test Conditions): 1000W/m², (25 ±2)°C, AM 1,5 in accordance with EN60904-3

Module Type		48E6+3bb 180QC	48E6+3bb 185QC	48E6+3bb 190QC	48E6+3bb 195QC	48E6+3bb 200QC
Rated Power (Pmpp):	Wp	180	185	190	195	200
Open Circuit Voltage (Uoc):	V	29,8	29,86	29,9	30,01	30,12
Short Circuit Current (Isc):	A	8,15	8,21	8,3	8,38	8,46
Max. Power Voltage (Umpp):	V	23,5	23,68	23,88	24,07	24,26
Max. Power Current (Imp):	A	7,68	7,81	7,96	8,1	8,24
Efficiency		13,57%	13,95%	14,32%	14,7%	15,08%

Electrical data - NOCT

Nominal Operating Cell Temperature: 47°C, 800W/m², AM 1,5


Module Type		48E6+3bb 180QC	48E6+3bb 185QC	48E6+3bb 190QC	48E6+3bb 195QC	48E6+3bb 200QC
Rated Power (Pmpp):	Wp	131	135	139	142	146
Open Circuit Voltage (Uoc):	V	27,78	27,83	27,87	27,97	28,08
Short Circuit Current (Isc):	A	6,6	6,65	6,72	6,79	6,85
Rated Voltage (Umpp):	V	21,91	22,07	22,26	22,44	22,61
Rated Current (Imp):	A	5,99	6,11	6,22	6,34	6,45

Additional electrical data

Classification range (positive classification)	W	-0/+3
Measurement accuracy of Pmpp under STC	%	±2,5
Max. System Voltage		1000V
Reverse Current		20A


Temperature Coefficients (Tc)

Isc / K	+0,0567%
Uoc / K	-0,3083%
Pmpp / K	-0,4034%

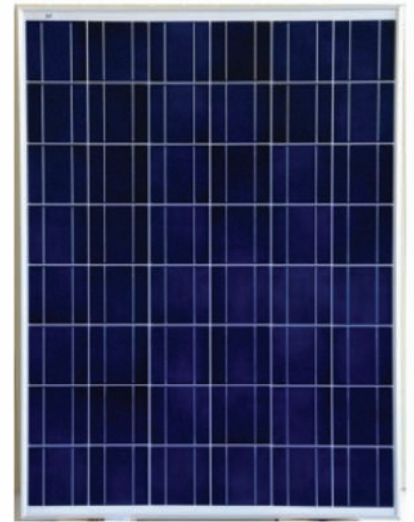

Basic Data

Length x width x height	mm	1340 x 990 x 42
Weight	Kg	18
Number of Cells		48 / 3bus bar
Cell size	mm ²	156 x 156
Cell Material		Multi-crystalline Si
Cell encapsulation		EVA (Ethylene Vinyl Acetate)
Front sheet		Tempered prismatic glass, low iron content 3,2 mm
Back Sheet (white/white)		PET (Polyethylene Terephthalate)
Frame material		Extruded Anodized Aluminum 42 mm
Cable "Flex-Sol-XL"	mm	Length 900 / ø4mm ²
Connectors		MC4
IP class		IP65
Bypass diodes		3 (nominal current 12A)

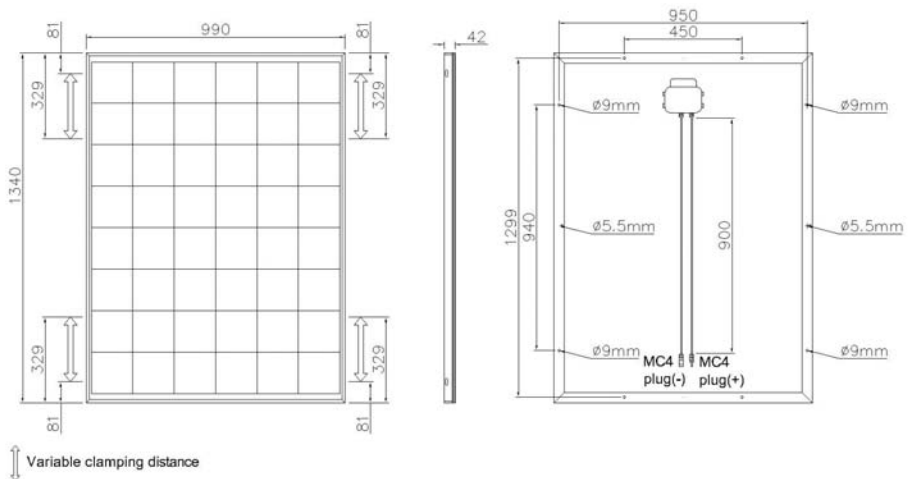

Performance Warranty: 10 years with max. loss of 10% on Power Rating
Performance Warranty: 25 years with max. loss of 20% on Power Rating
Product Warranty: 10 years

Permissible operating conditions

Temperature range	-40°C to +85°C
NOCT	47°C
Max. surface load capacity	Tested up to 5400 Pa according TÜV
Resistance against impact	Hail up to max. Diameter of 28mm, 86 km/h



www.tuv.com
 TÜVRheinland
 ID: 0000024672

- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic inspection

Technical specifications are subject to change. © Enfoton Solar Ltd - 01.12

Address and Contact: Enfoton Solar Ltd, Head Office and Factory: Synt, Georgiou Mbutou 14, 2660 Kokkinotrimithia, Cyprus
 P.O.Box 15046, 2666 Kokkinotrimithia, Cyprus. Tel: +357 22499716, Fax: +357 22499715, info@enfotonsolar.com www.enfotonsolar.com