


## DS-A36-220 Panels Specifications

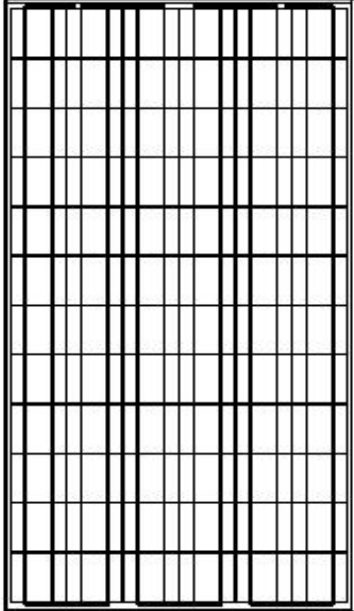

**Solar cells:** Polycrystalline solar cells

**Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

**Front Side:** High-transmission 3.2mm tempered glass

**Back Side:** TPT /TPE

**Frame:** Clear anodized aluminum frame

**Output :** 90cm Cable and Connector

Module Type	Pm(Wp)±5%	Vmpp(V)	Impp(A)	Voc(V)	Isc(A)	Module size	NET(kg)
DS-A36-220	220	36.0	6.11	44.6	6.67	1550*990*45 (mm) 61.0*39.0*1.77 (inch)	17.8

**Operation Temperature Range:** - 40°C ~ 85°C


**NOCT:** 48°C ± 3°C

**Temperature coefficients of Im:** + 0.1 %/°C

**Temperature coefficients of Vm:** - 0.38 %/°C

**Maximum System Voltage:** DC600V

**STC:** 1000W/m<sup>2</sup>, 25°C, AM1.5

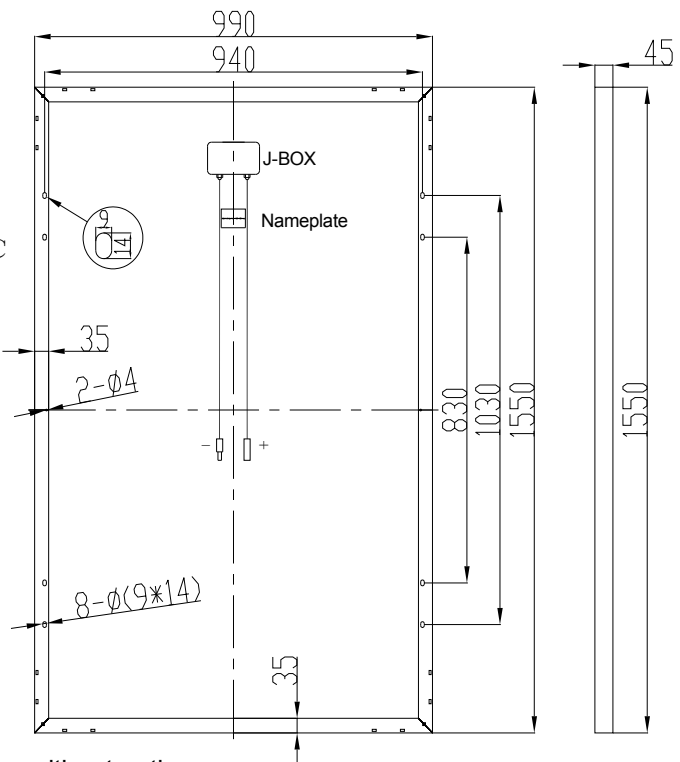

All the data of this sheet are subjected to change without notice.

Anji DaSol Solar Energy Science & Technology Co., Ltd.