

Visionary green energy

Black JT245SCc Series

Monocrystalline Solar Module

**There are no limits to what we can do.
Our possibilities are endless.**

You can buy solar technology anywhere today. But you don't receive the experience that is behind it. As a global company, Jetion has worked on new innovations and ideas since it was founded in 2004, contributing significantly to a clean and environmentally-friendly energy.

From highly efficient solar cells to complete solar energy installations, we offer sustainable solutions for increased performance and, at the same time, a healthier environment.

Jetion modules are particularly employed where long-term profitability, reliability and environmental issues are of great importance.



1 MW, Wirbenz, Germany

Specific conditions of guarantee and further information may be found at: www.jetionsolar.eu



JETION
SOLAR

We guarantee the highest income, for a long life.

Product Warranty

- 12 years for materials and workmanship.

Peak Power Warranty - 25 year linear warranty



Plus-Sorting

- With this plus-sorting we ensure that our customers pay for the watts they receive and guarantee the highest efficiency.

Key Features

- 60 monocrystalline solar cells.
- Strong aluminum frames in order to improve the bearing capacity and withstand strong wind.
- Special mounting holes on the frames for long and short side mounting.
- High transparency low iron tempered glass with enhanced stiffness and impact resistance.
- Advanced EVA encapsulation system with multilayer backsheets.



Electrical Features


All parameters are given in relation to 25 °C ambient temperature, 1000 W/m² irradiance and AM 1.5

Type		JT230SCc (Black)	JT235SCc (Black)	JT240SCc (Black)	JT245SCc (Black)
Max-Power	P _m (W)	230	235	240	245
Modul Power Range	(W)	235 > P _m ≥ 230	240 > P _m ≥ 235	245 > P _m ≥ 240	P _m ≥ 245
Power Tolerance	(W)	+0 ~ +5	+0 ~ +5	+0 ~ +5	+0 ~ +5
Max-Power Voltage	V _m (W)	30.3	30.8	31.1	31.4
Max-Power Current	I _m (A)	7.6	7.64	7.73	7.81
Short-Circuit Current	I _{sc} (A)	8.5	8.55	8.65	8.75
Open-Circuit Voltage	V _{oc} (V)	36.1	36.6	37	37.3
Max-System Voltage	(VDC)	600 V(UL)/1.000 V(IEC)			
Module Efficiency	(%)	14	14.3	14.6	14.9
Max. Series Fuse	(A)	15			
P _m Temperature Coefficients	(%/°C)	-0.4677			
I _{sc} Temperature Coefficients	(%/°C)	0.0492			
V _{oc} Temperature Coefficients	(%/°C)	-0.3374			
NOCT Nominal Operating Cell Temperature		45 ± 2 °C			

Maximum load rating: 5.400 Pa (112,78 lbf/ft²)

Mechanical Characteristics

Cable type, Diameter and Length	4 mm ² , TUV certified, 1.000 mm
Type of Connector	Compatible Type IV
Number, type and arrangement of cells	60 pcs, monocrystalline silicone (6x10)
Cell size (mm)	156x156
Dimension (mm)	1655x992x40
Weight (kg)	22.5
No. of Draining Holes in Frame	10
Color of frame	Black
Bypass-Diodes	6
Glass, Type and Thickness	High Transmission, Low Iron Tempered Glass 3.2 mm

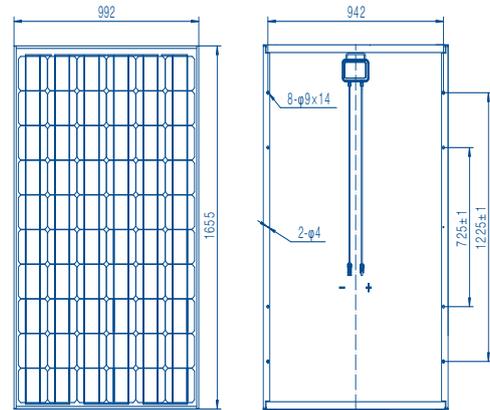

Packaging Configuration

Packing Configuration: 24 pcs in box

Quantity/Pallet: 48 pcs on pallet

Loading Capacity: 624 pcs in container (40 ft)



Absolute Ratings

Dielectric Insulation Voltage: 3000 V

Operating Temperature (°C): -40 ~ +85

Storage Temperature (°C): -40 ~ +85

I-V Kurven bei verschiedenen Beleuchtungsichten (AM 1,5; 25 °C)

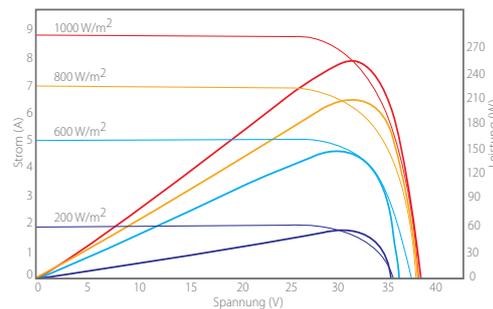

Certificates

IEC 61215.2 / IEC 61730

IEC 62716 / IEC 61701

UL 1703.3rd



Specifications included in this datasheet are subject to change without prior notice.

JETION SOLAR EUROPE

Jetion Solar (Europe) Ltd. | Industriering 10 | 9491 Ruggell | Liechtenstein

T: +423 265 3830 | F: +423 265 3839 | E: info@jetionsolar.eu | www.jetionsolar.eu



JETION
SOLAR

visionary green energy