


# AXN-P6T SERIES

## 210 – 235 WATT HIGH QUALITY POLY-CRYSTALLINE PV MODULES

### AUXIN SOLAR<sup>®</sup>

Using automated production lines, top of the line solar cells and materials complying to highest industry standards, Auxin Solar provides a complete set of poly and mono-crystalline PV modules ranging from **10W to 315W**.

Auxin Solar offers panels for use in small off-grid systems to the largest on-grid solar farms. Panels are tested and qualified for the severest weather conditions.

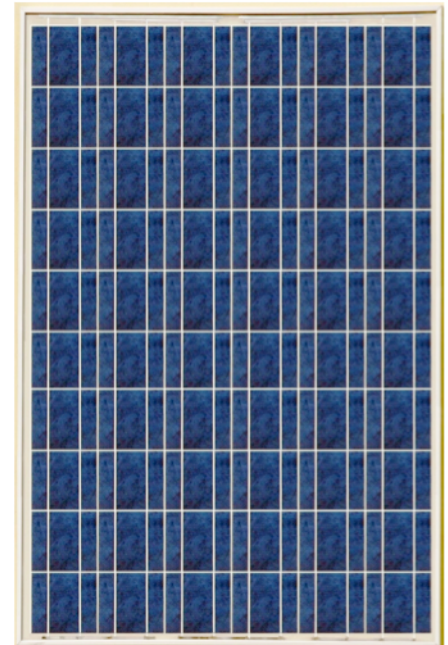

FEATURES	BENEFITS
Solar cell efficiency over 16.1%	Generate more energy per square meter
Protective, Bypass diodes	Avoids effect of partial shading
Factory equipped weatherproof junction box Waterproof (UL94, V-O) connector Anodized aluminum frame 24v system	Flawless operation in wet weather and marine applications Perfect for <b>GRID</b> applications
White tempered glass EVA resin Weather proof film Anodized aluminum frame	Resilient to harsh weather conditions
Highest standards in manufacturing and design quality Cleanroom-like production line ISO9001:2008	Optimal panel performance Long term product performance

### QUALITY ASSURANCE

- Backed by liability insurance
- Salt Mist Corrosion Certified
- Wind Resistance Load: 6000Pa
- ISO9001:2008

- Electrical insulation test
- Outdoor exposure test
- Hot spot endurance test
- UV exposure IEC61345
- Thermal cycling
- Humidity freeze
- Damp heat test
- Robustness of termination test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test

### INVESTMENT PROTECTION

- 5 years product workmanship guarantee
- 12 years 90% power output warranty
- 25 years 80% power output warranty



- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection






Specifications subject to change without notice.



# AXN-P6T SERIES

Electrical Characteristics	AXN-P6T210	AXN-P6T215	AXN-P6T220	AXN-P6T225	AXN-P6T230	AXN-P6T235
Maximum Power [W]	210	215	220	225	230	235
Tolerance	+ 3%					
Open circuit Voltage [V]	35.94	36.00	36.06	36.42	36.60	36.72
Short circuit Current [A]	7.60	7.83	7.95	8.10	8.17	8.23
Maximum Power Voltage [V]	29.64	29.94	30.12	30.36	30.48	30.60
Maximum Power Current [A]	7.09	7.18	7.30	7.41	7.55	7.68
Solar Cell Efficiency [%]	14.37	14.87	15.12	15.62	15.87	16.12
Series Fuse Rating [A]	15					
Terminal Box Protection Code	IP65					
Maximum System Voltage [V]	DC1000(IEC), DC600(UL)					
Operating Temperature [C]	-40 to 85					
Number of cells	60 (6" Poly)					

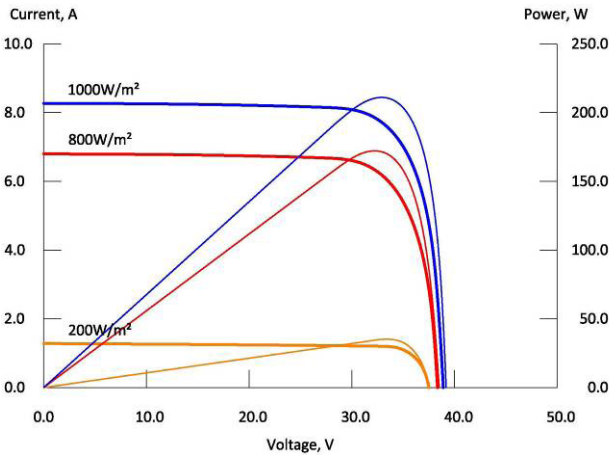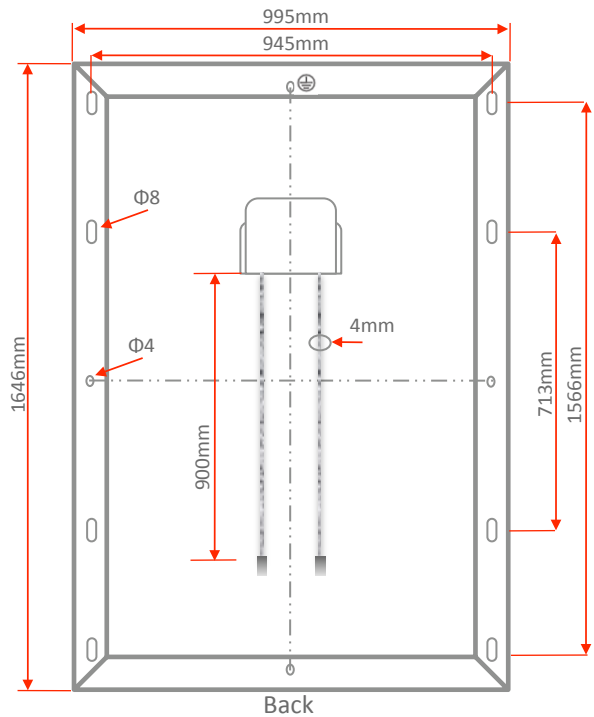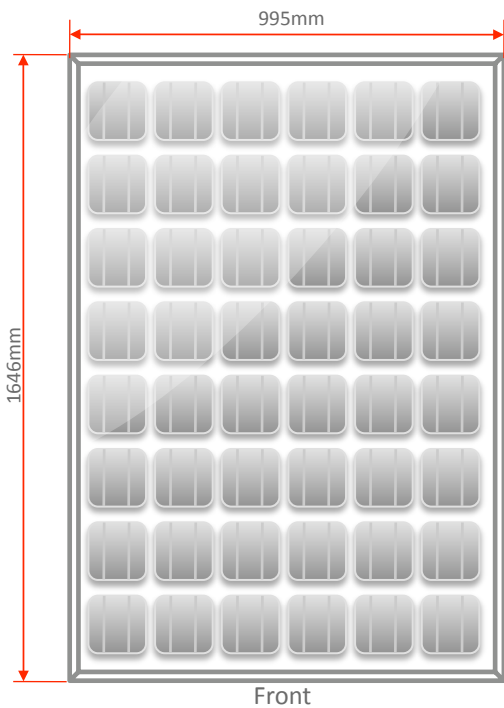

Legend: — Current & Voltage    — Power & Voltage

Mechanical Characteristics	
Frame	Anodized Aluminum
Dimension (L x W x D)	64.80" x 39.17" x 1.97" / 1646mm x 995mm x 50mm
Weight/pc	20.0kg/44.1lbs
Packing	10pcs/carton
Loading/container	240pcs/20ft; 560/40ft
Maximum wind load	6000 Pa

Temperature Coefficients		Standard Test Conditions (STC)	
NOCT	44.9±0.1°C	Irradiance	1000W/m <sup>2</sup>
Short circuit current	+0.06%/C	Module Temperature	25 °C
Open circuit voltage	-0.15%/C	AM	1.5
Max power output	-0.45%/C		

Specifications subject to change without notice.