




Front

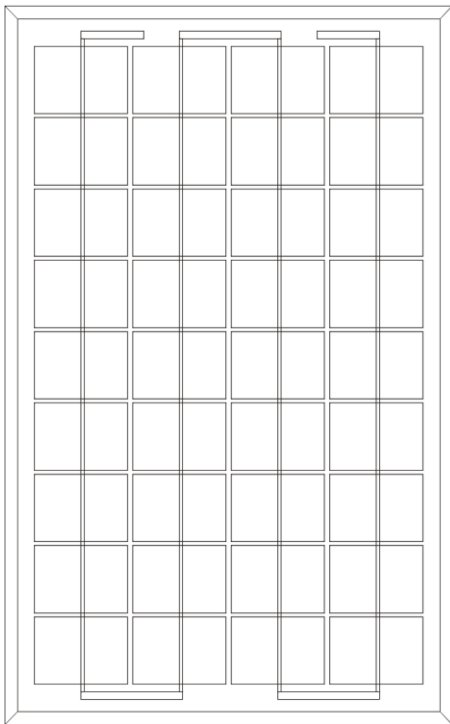

Rear

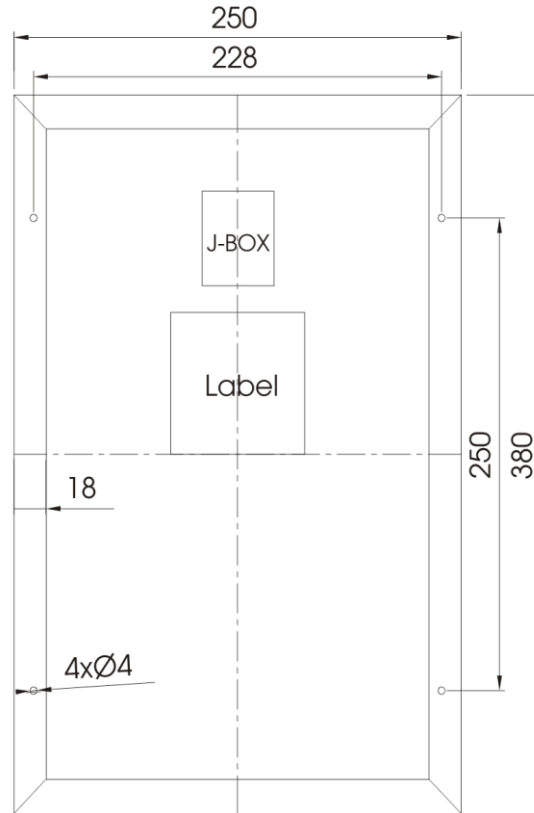

Section

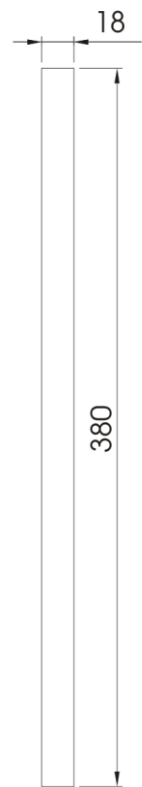

Dimensions:

(380 x 250) ± 2mm x 17 mm
Weight: 1.2 kg (NET)

Technical specification:

Laminate: Glass / EVA / TPE (tedlar / PET / tedlar) or TPT (white backsheet).
 Front: High-transmission 3.2 mm tempered glass
 Rear: TPT/TPE
 Cells: 36 multi-Si solar cells
 Frame: Clear anodized aluminium frame
 Output: Junction box, multicontact connectors (optional with cable)

Electrical data (at STC*): P_{mpp} : 10 W* (± 10%) / V_{mpp} : 17.1 V* / I_{mpp} : 580 mA* / V_{oc} : 21.4 V* / I_{sc} : 650 mA*

Operation temperature range: - 40 °C .. 85 °C
 NOCT: 48 °C ± 3 °C
 Temp. coeff. of I_m : + 0.1 % / °C
 Temp coeff. of V_m : -0.38 % / °C

Guarantee:

Product workmanship: 24 months**
 Power output: 66 months (92% of minimum P_{mpp})**

*: Standard Test Conditions (1000W/m², 25°C, 1.5 AM).

** : EXW SOLARC

SOLARC Innovative Solarprodukte GmbH Glogauer Straße 21, D-10999 Berlin Tel/Fax 030-3198554-00/99 info@solarc.de www.solarc.de	Product / Project CSM 36.1000 / Standard	Document Tech. Data Sheet	Issued 11.08.2011	Author AN
	Comments Data subject to change	Document no./ Ref. - / -	Modified	Author