



Monocrystalline Solar Module---SSxxx-72M

SS205-72M

SS200-72M SS195-72M
 SS190-72M SS185-72M
 SS180-72M SS175-72M



KEY FEATURES


- Guaranteed positive tolerance 0/+5W ensures output reliability
- Strong aluminum frames can bear snow loads up to 5400Pa and wind loads up to 2400Pa.
- Excellent performance under low light environments(morning evenings and cloudy days).
- 12 years for product defects in materials and workmanship and 25 years for 80% of warranted minimum power.
- Certifications and standards: IEC61215, IEC61730, conformity to CE.
- Manufactured according to International Quality(ISO9001).



Electrical Characteristics

All specified Parameters are at STC 25°C Ambient, 1000W/m² irradiance and AM 1.5

Type		SS175-72M	SS180-72M	SS185-72M	SS190-72M	SS195-72M	SS200-72M	SS205-72M
Max-Power	Pm(W)	175	180	185	190	195	200	205
Module Power Range	(W)	180>Pm≥175	185>Pm≥180	190>Pm≥185	195>Pm≥190	200>Pm≥195	205>Pm≥200	210>Pm≥205
Power Tolerance	(W)	+0~+5	+0~+5	+0~+5	+0~+5	+0~+5	+0~+5	+0~+5
Max-Power Voltage	Vm(V)	35.6	36.0	36.3	36.7	37.1	37.5	37.9
Max-Power Current	Im(A)	4.92	5.01	5.10	5.18	5.26	5.34	5.41
Open-Circuit Voltage	Voc(V)	44.2	44.3	44.4	44.5	44.6	44.6	44.7
Short-Circuit Current	Isc(A)	5.28	5.38	5.48	5.59	5.69	5.80	5.91
Cell Efficiency	(%)	16.3	16.8	17.3	17.7	18.2	18.7	19.1
Module Efficiency	(%)	13.7	14.1	14.5	14.8	15.2	15.6	16.0
Max-System Voltage	(VDC)	1000V(IEC)						
Max.Series Fuse	(A)	10						
Pm Temperature Coefficients	(%/°C)	-0.4601						
Isc Temperature Coefficients	(%/°C)	0.0981						
Voc Temperature Coefficients	(%/°C)	-0.5186						
NOCT Nominal Operating Cell Temperature		45±2°C						
Maximum load rating		5400Pa						

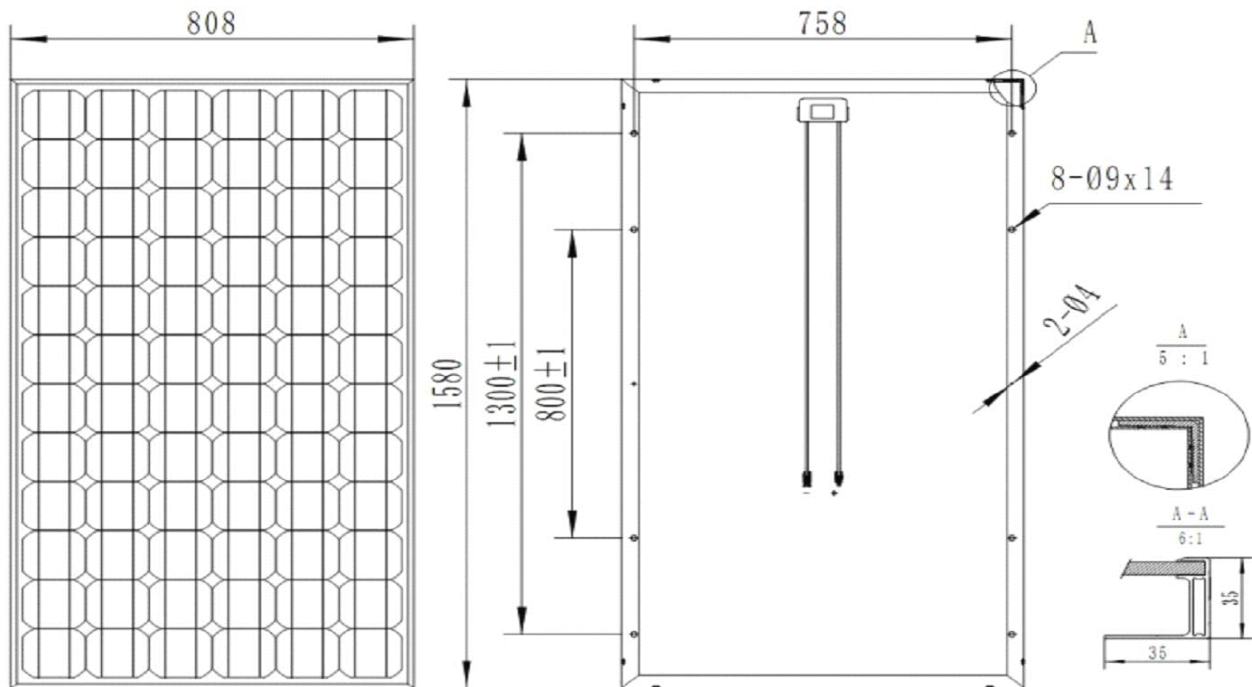


Packaging Configuration

Packing Configuration	26 pcs/box
Quantity/Pallet	52 pcs/pallet
Loading Capacity	840 pcs/40ft(H)

Absolute Ratings

Dielectric Insulation Voltage	3000V
Operating Temperature (°C)	-40~+85
Storage Temperature (°C)	-40~+85

I-V Curves

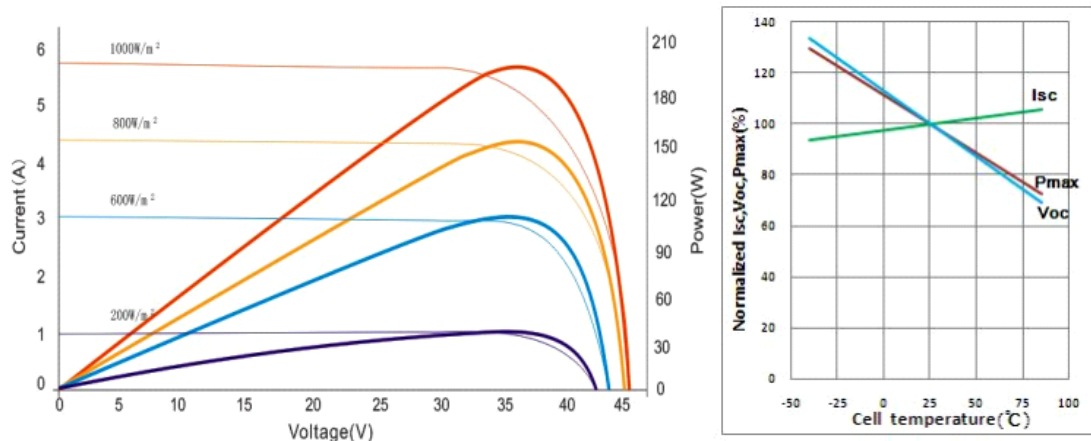

I-V Curves at different Irradiances (AM1.5 25°C)

Specifications included in this datasheet are subject to change without prior notice

Mechanical Characteristics

Cable type, Diameter and Length	4mm ² , TUV certified, 900mm
Type of Connector	Compatible with 05-6 plug
Number, type and arrangement of cells	72pcs, Mono-Crystalline Silicon(6×12)
Cell Size (mm)	125×125(D165)
Dimension (mm)	1580×808×35
Weight (Kg)	15.5
No. of Draining Holes in Frame	10
Glass, Type and Thickness	High Transmission, Low Iron, Tempered Glass 3.2mm

Jiangyin Shine Science and Technology Co., Ltd
 NO.1199 Bingjiang Road(W), Jiangyin, Jiangsu,
 214444, China

Tel: +86-510-66285883

Fax: +86-510-66285882

E-mail: sales@shine-solar.com.cn