


150-200 Watt

MONOCRYSTALLINE SOLAR MODULE

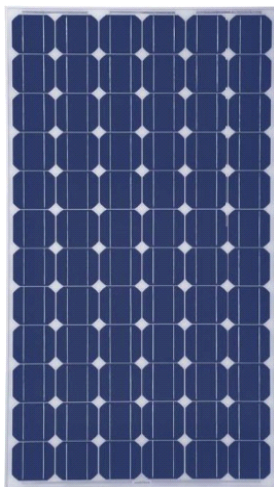

- High efficiency crystalline silicon cells
- High transmission low iron tempered glass, strong mechanical resistance
- Standard waterproof junction box, with bypass diode
- High endurance to different atrocious weather
- Custom designed modules according to clients' requirement

Electrical Characteristic

Module type		AP-M150	AP-M160	AP-M170	AP-M180	AP-M190	AP-M200
Maximum Power at STC(Pmax)	W	150	160	170	180	190	200
Power Output Tolerance	%	+/-3					
Module Efficiency	%	14.02	15	15.89	16.8	17.3	18.2
Optimum Operating Voltage(Vmp)	V	34.3	34.4	35.2	36	36.2	36.5
Optimum Operating Current(Imp)	A	4.37	4.66	4.83	5	5.25	5.48
Open-Circuit Voltage(Voc)	V	43.2	43.2	43.8	44.8	45	45.2
Short-Circuit Current(Isc)	A	4.87	5	5.14	5.3	5.55	5.78
Operating Module Temperature		-40°C to +80°C					
Maximum Series Fuse Rating		15A					


Mechanical Characteristics

Solar Cell	Monocrystalline 125x125 mm
No. of Cells	36(4x9)
Dimensions	1580x808x35mm
Weight	15.5kg
Front Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	IP65



Packing Configuration

Pieces Per Container	20'GP	40'GP
	290	636

Unit: mm

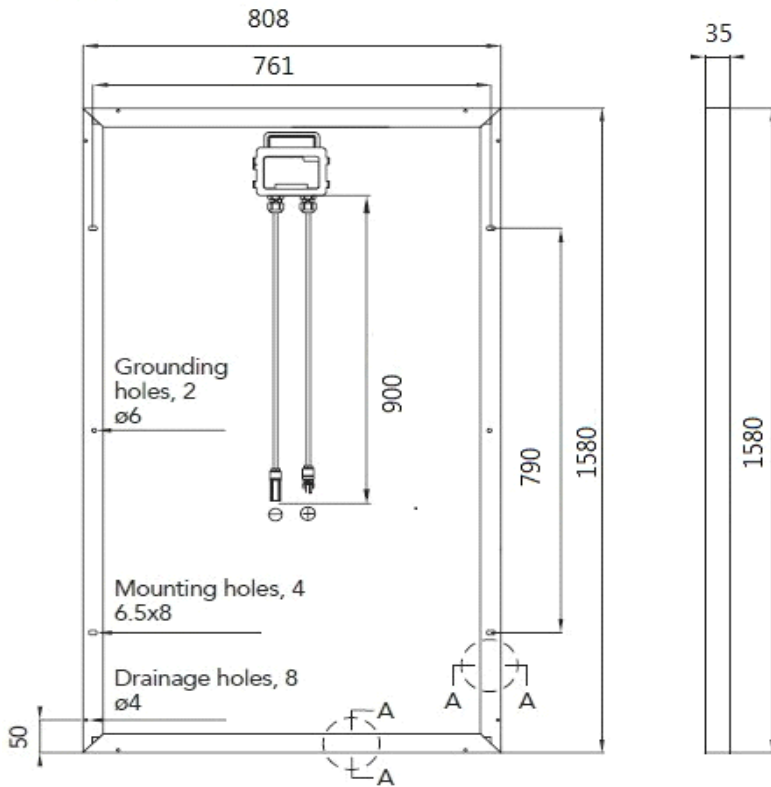

I-V Curve

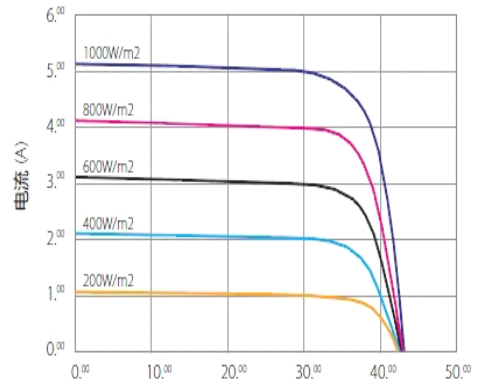

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of P _{max}	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of I _{sc}	0.050%/°C

Hebei Anpro New Energy S&T Ltd.,

Add: Handan Equipment Industrial Park, Hebei Province, China

Tel: 86-310-8679555 8679099

Email: anprosolar@anprogroup.com

www.anprogroup.com

