


SPECIFICATION OF 175W.180W.185W MONO SOLAR MODULE

Mono-Crystalline

Module type	Pm(W)	Number of cell	Cell Dimension (mm)	Max System Voltage(V)	Vm(V)	Im(A)	Voc(V)	Isc(A)
TYSM175	175W	72	125	1000	36.45	4.81	43.7	5.1
TYSM180	180W	72	125	1000	36.73	4.91	44.3	5.2
TYSM185	185W	72	125	1000	36.81	5.02	44.5	5.3

Parameter

Maximum system voltage (V)	1000
Temperature coefficients of Isc (%)	+0.1%/°C
Temperature coefficients of Voc (%)	-0.38%/°C
Temperature coefficients of Pm (%)	-0.47%/°C
Temperature coefficients of Im (%)	+0.1%/°C
Temperature coefficients of Vm (%)	-0.38%/°C
Temperature Range	-40°C ---85°C
Tolerance Wattage (e.g. +/-5%)	± 5%
Surface Maximum Load Capacity	60m/s (200kg/sq.m)
Junction Box Type	PPO, black
Connectors and Cables Type	4mm ²
Length of Cables (mm)	900
Cell Efficiency (%)	>17.5%
Output tolerance (%)	± 5%
Frame (Material, Corners, etc.)	Anodized Aluminum Alloy
Standard Test Conditions	AM1.5 100MW/cm ² 25°C
Guarantee of power	5 years for whole products,90% power for 10years, 80% power for 25years.
FF (%)	≥73.3%

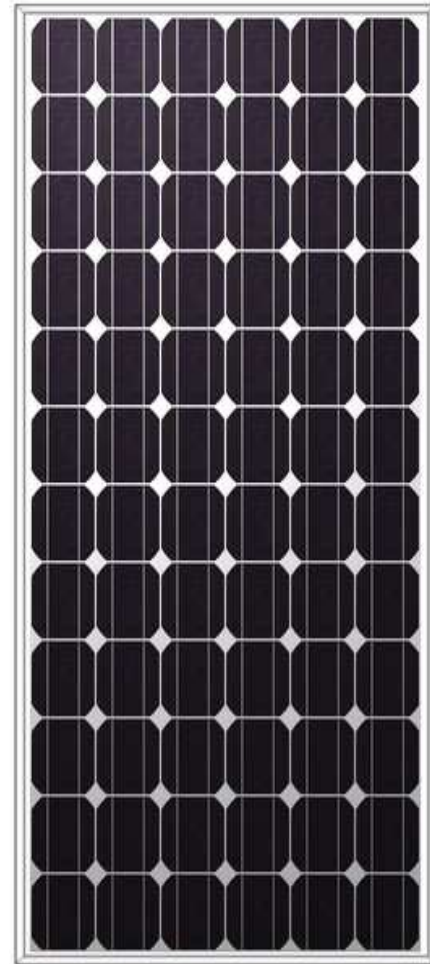

Physical Characters

Output	Module Net Weight	Module Size (MM)	Packing	20' Container	40' Container
175W	14.5(kg)	1580*808*35	2pcs/carton	288 pcs	672 pcs
180W	14.5(kg)	1580*808*35	2pcs/carton	288 pcs	672 pcs
185W	14.5(kg)	1580*808*35	2pcs/carton	288 pcs	672 pcs

深圳市拓阳新能源科技有限公司
SHENZHEN TUOYANG NEW ENERGY CO.,LTD
Tel: +86-755-2305 5561 Mobile : +86-13717084860

