


SPECIFICATION OF 50W POLY SOLAR MODULE

Poly-Crystalline

Module type	Pm(W)	Number of cell	Cell Dimension (mm)	Max System Voltage(V)	Vm(V)	Im(A)	Voc(V)	Isc(A)
TYSM50	50W	36	156	1000	18	2.78	22.190	3.16

Parameter

Maximum system voltage (V)	1000
Temperature coefficients of Isc (%)	+0.1%/°C
Temperature coefficients of Voc (%)	-0.38%/°C
Temperature coefficients of Pm (%)	-0.47%/°C
Temperature coefficients of Im (%)	+0.1%/°C
Temperature coefficients of Vm (%)	-0.38%/°C
Temperature Range	-40°C ---85°C
Tolerance Wattage (e.g. +/-5%)	± 5%
Surface Maximum Load Capacity	60m/s (200kg/sq.m)
Junction Box Type	PPO, black
Connectors and Cables Type	4mm2
Length of Cables (mm)	900
Cell Efficiency (%)	>16.0%
Output tolerance (%)	± 5%
Frame (Material, Corners, etc.)	Anodized Aluminum Alloy
Standard Test Conditions	AM1.5 100MW/cm² 25°C
Guarantee of power	5 years for whole products,90% power for 10years, 80% power for 25years.
FF (%)	≥73.3%

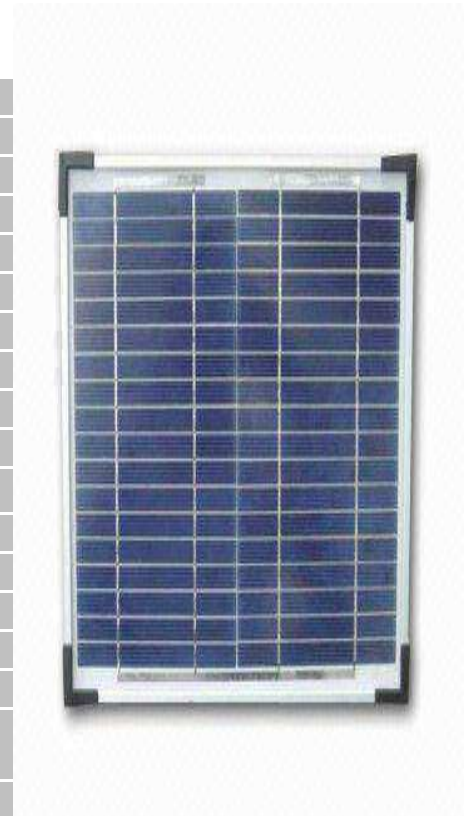

Physical Characters

Output	Module Net Weight	Module Size (MM)	Packing	20' Container	40' Container
50W	5.5(kg)	610*670*35	2pcs/carton	700 pcs	1500 pcs

深圳市拓阳新能源科技有限公司

SHENZHEN TUOYANG NEW ENERGY CO., LTD

Tel: +86-755-2305 5561 Mobile : +86-13717084860

www.sztuoyang.com

Email:szsyty@163.com

