


D. TS6S72_Mono • Multi 6 Inch 72cells

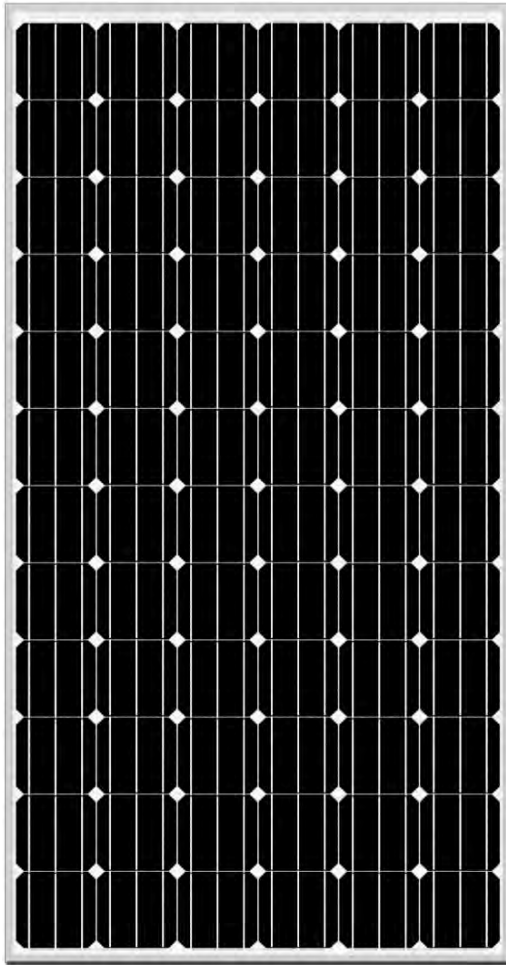

TS-S300 TS-S305 TS-S2310 TS-S315

	Pmpp	300	305	310	315
Nominal power [Wp]	Pmpp	300	305	310	315
Voltage at nominal power [V]	Vmpp	36.02	36.19	36.39	36.55
Current at nominal power [A]	Imp	8.33	8.43	8.52	8.62
Open-circuit voltage [V]	Voc	44.91	45.19	45.40	45.65
Short-circuit current [A]	Isc	8.80	8.89	8.99	9.09
Module efficiency level [%]		15.49	15.75	16.01	16.27
Output tolerance [%]		±2	±2	±2	±2
Dimensions (HxWxT)		1960 x 991 x 40 mm			
Weight		24 kg			

TS-M280 TS-M285 TS-M290 TS-M295

	Pmpp	280	285	290	295
Nominal power [Wp]	Pmpp	280	285	290	295
Voltage at nominal power [V]	Vmpp	36.80	37.11	37.52	37.78
Current at nominal power [A]	Imp	7.61	7.68	7.73	7.81
Open-circuit voltage [V]	Voc	45.46	45.87	46.28	46.63
Short-circuit current [A]	Isc	8.11	8.18	8.25	8.33
Module efficiency level [%]		14.46	14.72	14.98	15.23
Output tolerance [%]		±2	±2	±2	±2
Dimensions (HxWxT)		1960 x 991 x 40 mm			
Weight		24 kg			

