


E. TS6S60_Mono • Multi 6 Inch 60cells

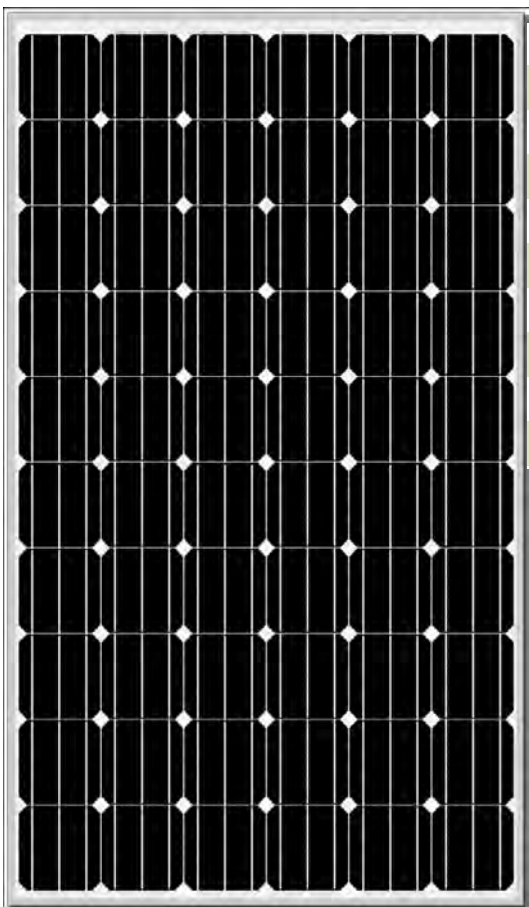

TS-S245 TS-S250 TS-S255 TS-S260

Nominal power [Wp]	Pmpp	245	250	255	260
Voltage at nominal power [V]	Vmpp	29.92	30.16	30.40	30.63
Current at nominal power [A]	Impp	8.19	8.29	8.39	8.49
Open-circuit voltage [V]	Voc	37.02	37.33	37.69	37.99
Short-circuit current [A]	Isc	8.72	8.82	8.91	9.01
Module efficiency level [%]		15.25	15.56	15.87	16.18
Output tolerance [%]		±2	±2	±2	±2
Dimensions (HxWxT)		1640 x 988 x 40 mm			
Weight		18 kg			

TS-M235 TS-M240 TS-M245 TS-M250

Nominal power [Wp]	Pmpp	235	240	245	250
Voltage at nominal power [V]	Vmpp	31.01	31.38	31.86	32.20
Current at nominal power [A]	Impp	7.58	7.65	7.69	7.77
Open-circuit voltage [V]	Voc	38.35	38.87	39.29	39.75
Short-circuit current [A]	Isc	8.07	8.13	8.21	8.28
Module efficiency level [%]		14.50	14.81	15.12	15.43
Output tolerance [%]		±2	±2	±2	±2
Dimensions (HxWxT)		1640 x 988 x 40 mm			
Weight		18 kg			

