


VIGESTSOLAR

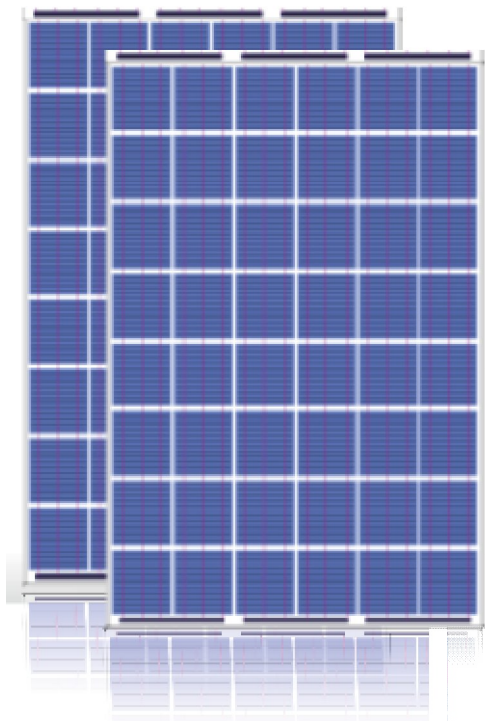

POLYCRYSTALLINE MODULES VG - P 200 –205 W

Tempered glass with high optical transmittance

High efficiency cells, mechanical strength

Efficiency and reliable performance



ELECTRICAL CHARACTERISTICS

	Watts	200	205
Maximum power (Pmpp)	Watts	200	205
Tolerance	%	± 3	
Voltage at maximum power (Vmpp)	Volts	24.3	24.5
Current at maximum power (Impp)	Amperes	8.23	8.37
Open circuit voltage (Voc)	Volts	30.38	30.63
Short circuit current (Isc)	Amperes	8.73	8.74
Maximum system voltage (Vsyst)	Volts	600 (UL) 1000 (IEC)	
Diodes (By-pass)	Quantity	3 pcs or 6 pcs	
Efficiency (ηm)	%	15.3	15.7

MECHANICAL CHARACTERISTICS

Size	mm	1330x992x35
Weight	Net	14.5 kg
Frame	Material	Electrophoresis silvery white
Cells	Type	Polycrystalline
	Quantity	6 x 8 = 48
	Size	156 x 156 mm.
Encapsulation	Materials	High-strength 3,2mm low-iron tempered glass, anti-aging EVA and TPT composite membrane with excellent weatherability
Junction box	Type	PVRH0502B

CHECK FOR
AVAILABILITIES





TEMPERATURE COEFFICIENTS



Power temperature coefficient	-0.43 %/°C
Current temperature coefficient	0.02 %/°C
Voltage temperature coefficient	-0.34 %/°C
NOCT (Nominal Operating Cell Temperature)	+ 47 ± 2 °C
Working temperature	- 40 ~ + 85 °C

WARRANTIES

10 years limited warranty on material and workmanship

90% performance assurance on 12 years

80% performance assurance on 25 years

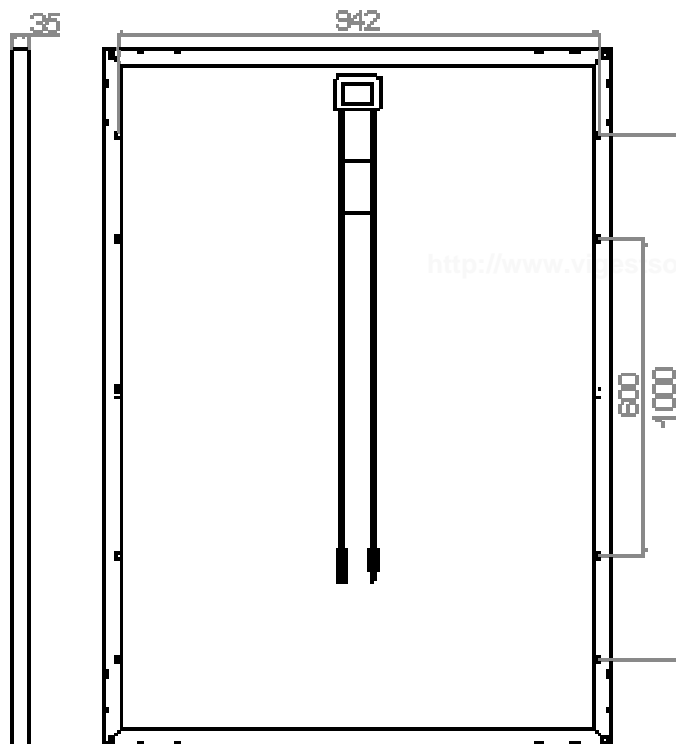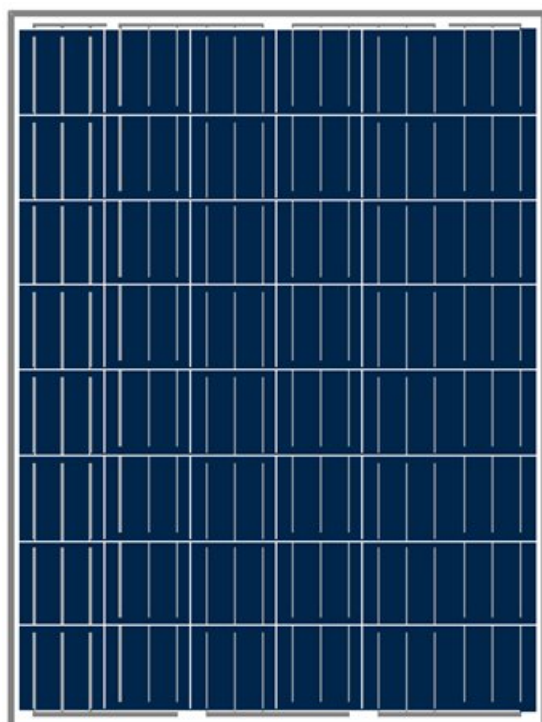

Spain
Calle Almendralejos 25
2814 Madrid
Tel./Fax: (+34) 916203245
Mobile: (+34) 646180927

Italy
Via Della Poesia 5
547030 (FC)
Tel./Fax: (+39) 5411793069
Mobile: (+34) 3474533429

Bulgaria
D. Manovstreet
1408 Sofia
Mobile: (+359) 886 497607

I-V CURVES

