

MONOCRYSTALLINE MODULES

D-SWM-195W/72M-SE-Quadra



**optimise the roof area
with Quadra**

Product features

Guaranteed positive output tolerance of 0-3%

Junction box with 3 bypass diodes minimises decline in output when shadowing

3.2mm tempered glass for more stability and corrosion resistance

Backsheet lamination for long-term weather protection and anti-moisture

Warranty

Product warranty:
12 years (material & manufacture)

Output guarantee:
10 years on 90% of maximum output
25 years on 80% of maximum output





TECHNISCHES DATENBLATT
High Power Photovoltaic Module

MONOCRYSTALLINE MODULES
D-SWM-195W/72M-SE-Quadra



Electrical Data

Maximum Power (0-3%Wp)	195W
Maximum power voltage (Vmp)	37.3V
Maximum power current (Imp)	5.23A
Open circuit voltage (Voc)	45.3V
Short circuit current (Isc)	5.56A
Maximum system voltage (Vmax)	1000V
Cell Efficiency	17.5%
Module Efficiency	15.3%
Cell Configuration	72 in Series
NOCT	45°C±2°C
Temp. coefficient Power	-0.50%/°C
Temp. coefficient Isc	+0.043%/°C
Temp. coefficient Voc	-0.34%/°C

*Measurement conditions under irradiance level of 1000W/m², 1.5 Air Mass Spectrum, cell temperature of 25°C

Mechanical Data

Dimension of module	1191(L) x 1067(W) x 35(H) mm
Weight	15.5 kg
Frame structure (Material)	Aluminium
Front side	Glass
Front glass thickness	3.2 mm
Encapsulant	EVA
Back side	TPT
Junction Box	IP65
Cable	900 mm (Ø 4mm ²)
Max. Series Fuses	8A


Absolute Maximum Ratings

Operating Temperature	-40°C to +85°C
Maximum Hail diameter	up to 25mm Ø
Continuous wind pessure	up to 130 Km/h


Packing Configurations

Packing configuratin	26 pcs. / box
Quantity/pallet	1 box / pallet
HQ Container	936 pcs. / container

Characteristic Curves

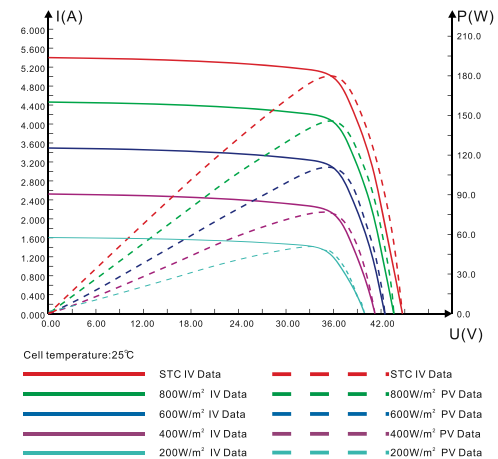

Dimensions

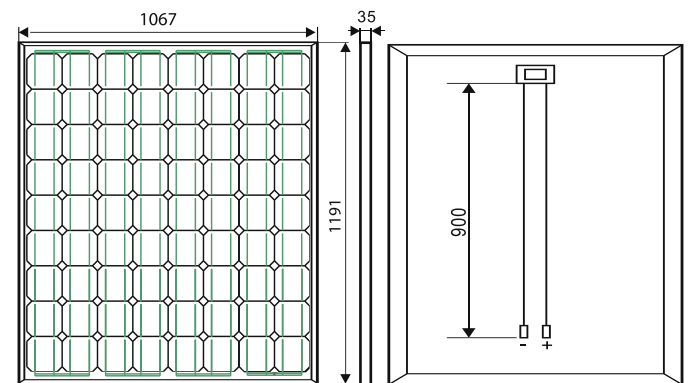

Indemnity against liability: Given technical data are averages and could vary slightly. The directly related data of the special measuring - flashreport are decisive. Subject to changes, errors and omissions excepted. Technical changes within the further development are to be reserved by the manufacturer and producer. Images can differ from actual/original product.

Data as: January 2012



Gleimstraße 50 | 10437 Berlin, Germany
 T +49 (0)30 63 22 29-60 | F +49 (0)30 63 22 29-59
 info@deng-sunwin-solar.de | www.deng-sunwin-solar.de