
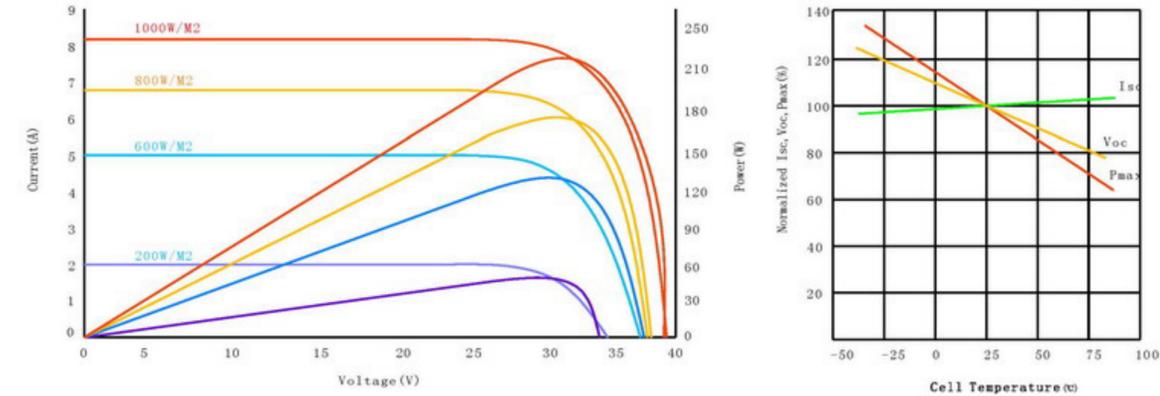


PRODUCTS

Polycrystalline
Silicon Solar Panel

ZC156P/60

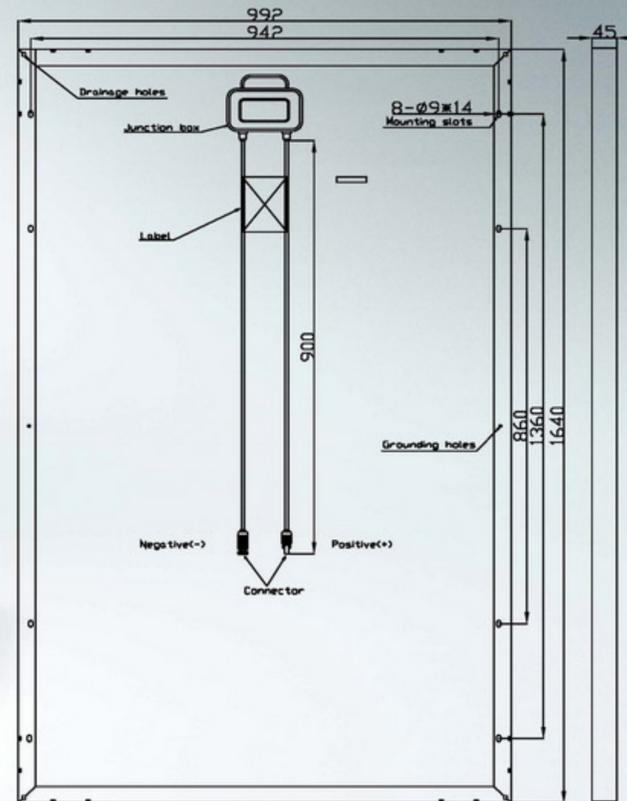

Electrical Characteristics

Item	ZCS225P	ZCS230P	ZCS235P	ZCS240P	ZCS245P	ZCS250P
Maximum Power (Pmax)	225	230	235	240	245	250
Maximum Power voltage(Vm)	30.3	30.5	30.9	31.4	31.8	32.3
Maximum Power current(I _m)	7.44	7.55	7.61	7.64	7.70	7.74
Open circuit voltage(Voc)	36.5	37.1	37.3	37.7	38.0	38.4
Short circuit current(I _{sc})	8.09	8.11	8.18	8.22	8.28	8.32
Module efficiency	13.83	14.14	14.44	14.75	15.06	15.37
Maximum series fuse	15A					
No. of diode	6					
Power Tolerance	0~3%					
Type of junction box	IP65					
Maximum system voltage	1000V					
Temperature coefficient of I _{sc}	+0.042%/°C					
Temperature coefficient of Voc	-0.393%/°C					
Temperature coefficient of power	-0.52%/°C					
NOCT(Nominal operating cell temperature)	47°C±2°C					
Standard test conditions	STC: AM1.5, 1000 W/m ² , Module Temperature 25°C					

Mechanical Characteristics

Cable type ,Diameter and Length	4mm ² ,TUV certified,900mm
Quantity of cells	60 pcs (6x10)
Cell Type	156×156Poly Solar Cell
Size of module (Length and Width)	1640mm x 992mm
Weight	22 Kg
No. of Draining Holes in Frame	20
Frame (type, material and thickness)	Anodized Alu. alloy frame, 45 mm thickness
Glass,Type and Thickness	High transmission,Low Iron, Tempered Glass 3.2mm

Absolute Ratings

Dielectric Insulation Voltage	3000V
Operating temperature (°C)	-40°C +85°C
Storage Temperature(°C)	-40°C +85°C

Performance

Warranty	90%power output over 10 years 80%power output over 25 years Free from defects in materials and workmanship for 10 years
----------	---

Qualification Test

Temperature cycling range	-40°Cto+85°Cfor 200 cycles
Damp heat test	-85°Cto+85°Crelative humidity for 1000h
Front & rear static load test(eg.wind)	2400Pa
Front load test(eg.snow)	5400Pa
Impact Resistance Hail Impact Test	227g steel ball fall down from 1m height

