


TECHNICAL SPECIFICATIONS	MODEL NUMBER: NS260P-6M	
Maximum Power (Pmax)	260 W	
Optimum Power Voltage (Vmp)	31.09 V	
Optimum Operating Current (Imp)	8.33 A	
Open Circuit Voltage (Voc)	37.60 V	
Short Circuit Current (Isc)	9.01 A	
Maximum System Voltage	600 V	
Temperature Coefficient of Isc	0.035 %/C	
Temperature Coefficient of Voc	-0.341 %/C	
Temperature Coefficient of Pm	-0.482 %/C	
length	1628 mm	64.09 in
width	982 mm	38.66 in
height	40 mm	1.57 in
Front glass thickness	3.2 mm	0.13 in
Weight	18 kg	49.38 Lbs
Surface Maximum Load Capacity	5400 Pa	50.13 psf
Allowable Hail Load	23 m/s, 25 mm	52 mph, 1 in
Number of Internal Bypass Diodes	3	
Solar Cell Dimensions (mm)	156 mm x 156 mm	6.14 in x 6.14 in
Solar Cell Type	Monocrystalline	
Number of Solar Cells	60 (6 x 10)	
Ambient Operating temperature	-40 C to 85 C	-40 F to 185 F
Module Efficiency (%)	16.26	
Standards tested to by certification Agency	UL1703	
Power output /workmanship warranty	90% : 10 years, 80%: 25 years/10 years	

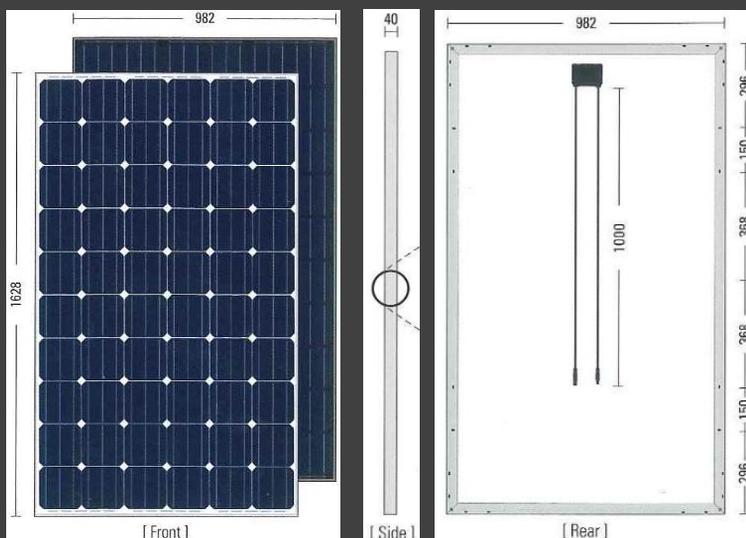

#### FEATURES

- Specifically engineered to maintain optimal functionality in extreme climates
- Composed of highly efficient cells
- Ideal for integration into residential and commercial applications
- Backed with 25 year warranty (90%: 10 years, 80%: 25 years)
- Available in triple black/original blue