

SD ECO PLUS 15Wp



SD DirectPro

SD ECO PLUS 15Wp

Specifications	
Cell	polycrystalline solar cell 52mm x 52mm
No. of cells and connections	36(6 x 6)
Dimension of module (mm)	375 x 365 x 25
Weight	1.7kg

Characteristics	
Model	SD ECO PLUS 15Wp
Open circuit voltage (Voc)	21.4V
Optimum operating voltage (Vmp)	18.1V
Short circuit current (Isc)	0.92A
Optimum operating current (Imp)	0.83A
Maximum power at STC (Pm)	15Wp


STC: Irrandiance 1000W/m2, Module temperature 25°C, AM=1.5

Limits	
Operating temperature	-40°C to + 85°C
Maximum system voltage	1000V DC

Temperature and Coefficients		
NOCT	48°C ± 2°C	
Current temperature coefficient	%/K	0.035
Voltage temperature coefficient	MV/K	-0.37
Power temperature coefficient	%/K	-0.5

NOCT: Nominal Operation Cell Temperature

5 year warranty

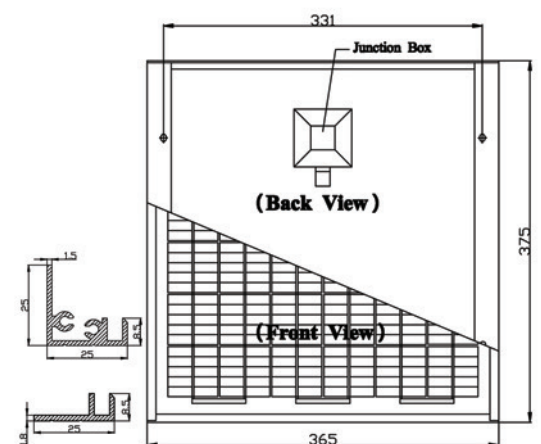

ITEM	MODULE SIZE	PALLET SIZE	Qty Per Pallet	Pallet per 40' Container	Qty 40' Container
SD ECO PLUS 15Wp	375*365*25	1310*1170*2100mm	840pcs	9 Pallets	13440pcs