




JG-D36PCS-30W

标准测试条件下的电性能


标准测试条件：太阳能辐射强度1000W/m²，组件温度25℃，AM=1.5

组件规格	D36PCS-30W		
最大功率(Pmax)	30W(0~+3W)		
Max-Power Voltage (Vmp) (V)	17.80		
Max-Power Current (Imp) (A)	3.37		
Open-Circuit Voltage (Voc) (V)	21.36		
Short-Circuit Current (Isc) (A)	3.71		
Max-System Voltage (VDC)	1000		
Module Efficiency (%)	12.12%		

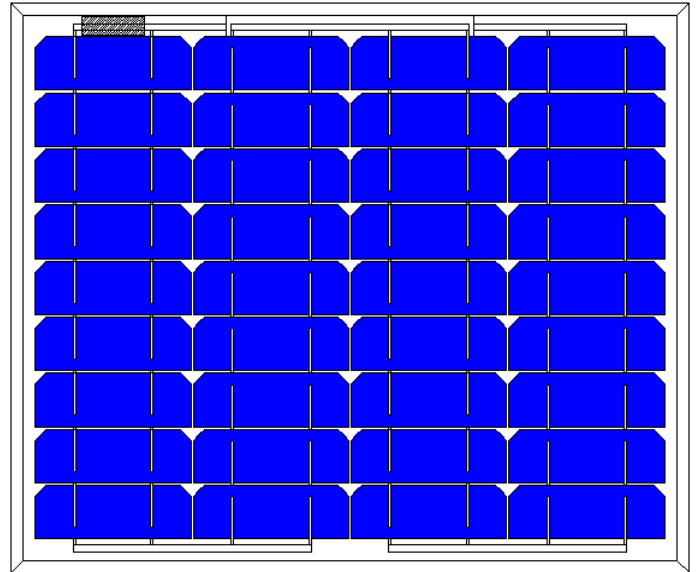

GENERAL CHARACTERISTICS

Dimension (mm)	550×450×30	
Cell and Connections (mm)	125×125 Mono-crystalline silicon, 36 in series(4×9)	
Number of Bypass Diodes	1	
Max. Series Fuse (A)	6A	
Junction Box (Protection Degree)	≥ IP65	
Module Weight (Kg)	3.33	

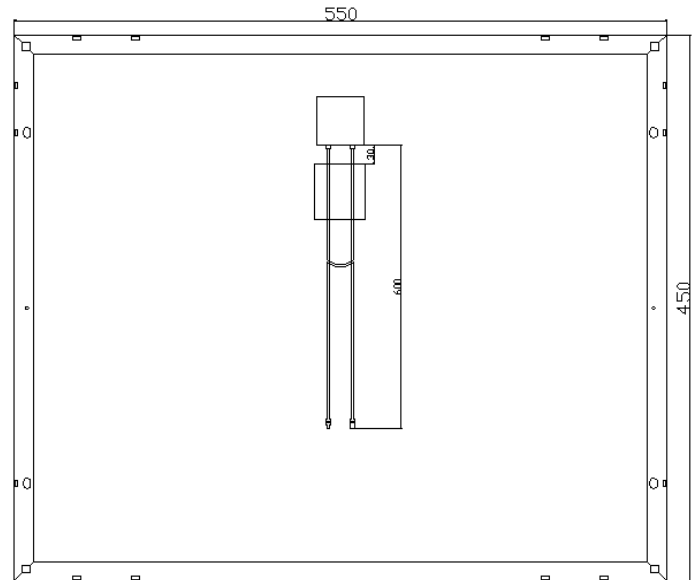

TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature	47± 2 °C
Pm Temperature Coefficient	- 0.42 %/°C
Voc Temperature Coefficient	- 0.29%/°C
Isc Temperature Coefficient	0.037%/°C
Operating Temperature	-40~+85 °C
Storage Temperature	-40~+85 °C



Clean Energy Council
MEMBER

