


### Model (SL30TU-18MD) Specifications

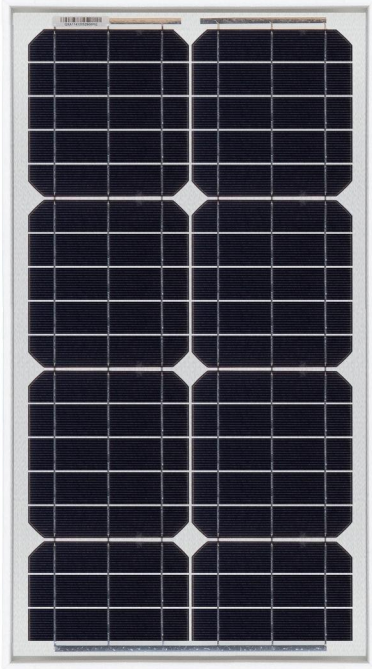


#### Electrical Data

Maximum Power(W)	30W
Optimum Power Voltage(Vmp)	18.57V
Optimum Operating Current(Imp)	1.62A
Open Circuit Voltage(Voc)	22.64V
Short Circuit Current(Isc)	1.73A
Cell Efficiency (%)	17.96%
Module Efficiency (%)	12.65%
Tolerance Wattage(e.g. +/-3%)	0 +3%
NOCT	47°C +/-2°C

#### Benefits

- High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- Bypass diode minimizes the power drop caused by shade;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.

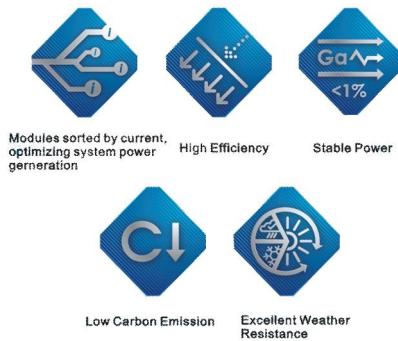

#### Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

#### Temperature Coefficients

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38





IGNITE THE POWER OF NATURE

Monocrystalline Module  
--small size 30Watt

Components & Mechanical

Solar Cell	156*30.6(32.1) Mono
Number of Cell(pcs)	2*18
Size of Module(mm)	650*360*28
Front Glass Thikness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	2.9
Frame(Material Corners,etc.)	28#
Backing (Brand Type)	TPT
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m <sup>2</sup> 25°C


Packing

Packing	Wooden Box
Pieces per container	105pcs/Pallets

Project Picture



Engineering Drawings

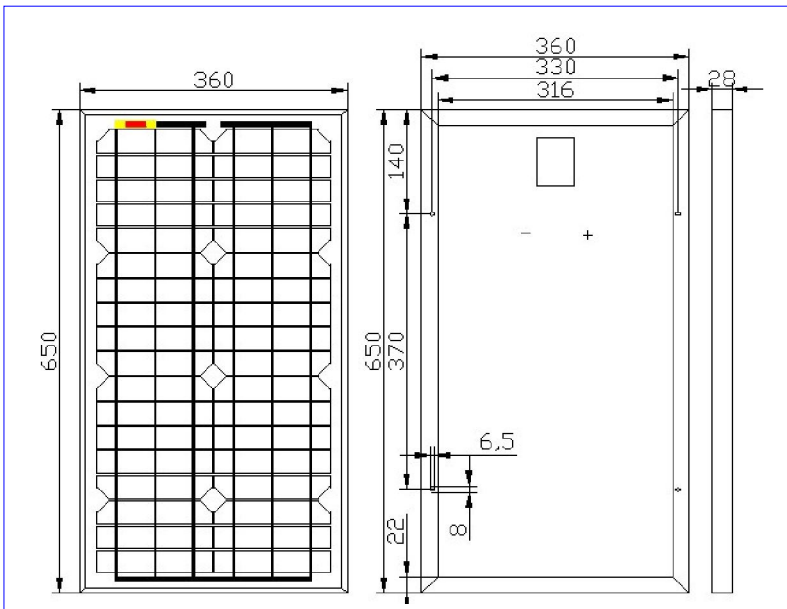

©2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved.  
Specifications included in this datasheet are subject to change without notice.



**Ningbo Qixin Solar Electrical Appliance Co., Ltd**  
ADD: No. 37 Jingang Road, Binhai Industrial Park,  
Xiangshan County, Ningbo, 315700, China  
TEL: 0086 (0)574 25758821  
FAX: 0086 (0)574 25758820  
E-mail: info@nbqxsolar.com

