

Visionary green energy



# JT200SAb

## Monocrystalline Solar Module

There are no limits to what we can do.  
Our possibilities are endless.

You can buy solar technology anywhere today. But you don't receive the experience that is behind it. As a global company, Jetion has worked on new innovations and ideas since it was founded in 2004, **belonging to CNBM who is Chinese State owned company with over 30 years history.**


From highly efficient solar cells to complete solar energy installations, we offer sustainable solutions for increased performance and, at the same time, a healthier environment.

Jetion modules are particularly employed where long-term profitability, reliability and environmental issues are of great importance.

We guarantee the highest income, for a long life.

### Product Warranty

- 12 years for materials and workmanship.
- **Peak Power Warranty - 25 year linear warranty**

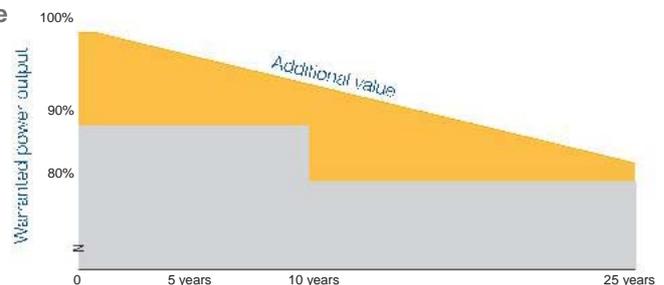

### Plus-Sorting

- With this plus-sorting we ensure that our customers pay for the watts they receive and guarantee the highest efficiency.

### Key Features

- 72 monocrystalline solar 125\*125mm cells.
- Strong aluminum frames in order to improve the bearing capacity and withstand strong wind.
- Special mounting holes on the frames for long and short side mounting.
- High transparency low iron tempered glass with enhanced stiffness and impact resistance.
- Advanced EVA encapsulation system with multilayer backsheets.





50MW, Prakhonchai Thailand

Specific conditions of guarantee and further information may be found at: [www.jetionsolar.com](http://www.jetionsolar.com)



# Mono-crystalline 125x125 Module JT SAb

I-V Curves at different Irradiances

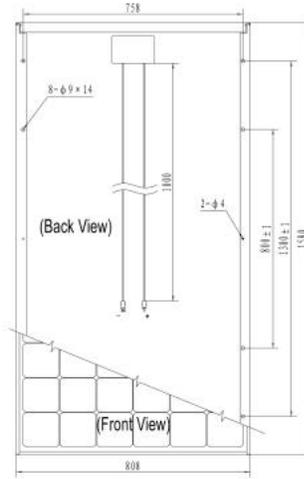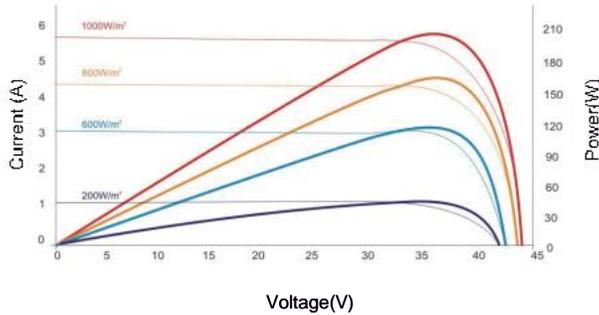

All specified Parameters are at STC 25°C Ambient ,1000W/m<sup>2</sup> irradiance and AM 1.5

STC		Electrical Characteristics				
Type		JT185SAb	JT190SAb	JT195SAb	JT200SAb	JT205SAb
Module Power Range	(W)	185 ≤ P <sub>m</sub> < 190	190 ≤ P <sub>m</sub> < 195	195 ≤ P <sub>m</sub> < 200	200 ≤ P <sub>m</sub> < 205	205 ≤ P <sub>m</sub>
Max-Power	P <sub>m</sub> (W)	185	190	195	200	205
Max-Power Voltage	V <sub>m</sub> (V)	36.27	36.5	36.75	37.0	37.2
Max-Power Current	I <sub>m</sub> (A)	5.1	5.2	5.31	5.42	5.51
Open-Circuit Voltage	V <sub>oc</sub> (V)	45	45.2	45.4	45.6	45.9
Short-Circuit Current	I <sub>sc</sub> (A)	5.5	5.6	5.7	5.8	5.9
Module Efficiency	(%)	14.5	14.9	15.3	15.7	16.1
Max-System Voltage	(VDC)	600V(UL)/1000V(IEC)				
Max.Series Fuse	(A)	10				
P <sub>m</sub> Temperature Coefficients	(%/°C)	-0.42				
V <sub>oc</sub> Temperature Coefficients	(%/°C)	-0.31				
I <sub>sc</sub> Temperature Coefficients	(%/°C)	0.039				
NOCT Nominal Operating Cell Temperature		45 ± 2°C				
Maximum load rating		5400Pa(112.78lbf/ft <sup>2</sup> )				
Class AAA solar simulator (IEC 60904-4), power measurement uncertainty is within ± 3%						

NOCT		JT200SAb	JT205SAb
Max-Power	P <sub>m</sub> (W)	148.2	150.5
Max-Power Voltage	V <sub>m</sub> (V)	34.6	34.5
Max-Power Current	I <sub>m</sub> (A)	4.28	4.36
Open-Circuit Voltage	V <sub>oc</sub> (V)	42.6	42.6
Short-Circuit Current	I <sub>sc</sub> (A)	4.67	4.75

Absolute Ratings	
Dielectric Insulation Voltage	3000V
Operating Temperature (°C)	-40~+85
Storage Temperature (°C)	-40~+85

Packaging Configuration	
Packing Configuration	25 pcs/box or 2 pcs/box
Quantity/Pallet	52 pcs/pallet
Loading Capacity	728 pcs/40ft

Cable type, Diameter and Length	4mm <sup>2</sup> , TUV certified, 1000mm
Type of Connector	Compatible with MC4 plug
Number, type and arrangement of cells	72pcs, Mono-Crystalline Silicon(6 × 12)
Cell Size (mm)	125x125(D165)
Dimension (mm)	1580x808x40
Weight (Kg)	15.5
No.of Draining Holes in Frame	10
Glass, Type and Thickness	Low Iron, High Transmission, Tempered Glass 3.2mm

NOCT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, AM=1.5, wind speed 1m/s  
 Specifications included in this datasheet are subject to change without prior notice