




**KFSOLAR**  
wisdom enlighten future

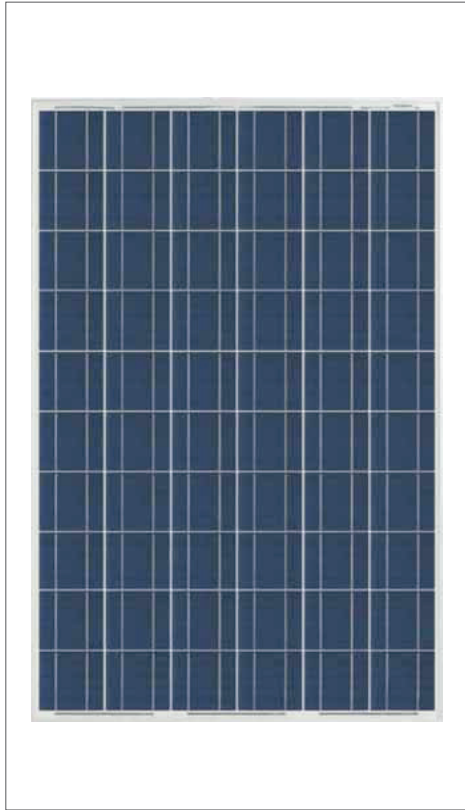

## KF MODULE

### Polycrystalline

KF-60P6-200W KF-60P6-205W KF-60P6-210W  
KF-60P6-215W KF-60P6-220W

- \* High transmittance, low iron tempered glass with enhanced stiffness and impact resistance.
- \* Unique frame design with high mechanical strength for easy installation.
- \* Advanced encapsulation material with multilayer sheet lamination to provide long-life and enhanced cell performance.
- \* Outstanding electrical performance under high temperature and low irradiance conditions.
- \* Carbon Friendly.


### Warranty:

5 years for product defects in materials and workmanship  
10 years for 90% of warranted minimum power  
25 years for 80% of warranted minimum power

### Certificates:



IEC: IEC 61215, IEC 61730 (1&2), conformity to CE  
ISO9001:2008 GB/T 19001-2008  
ISO9001:2008 Quality Management System  
PV Cycle: Voluntary module take back and recycling program

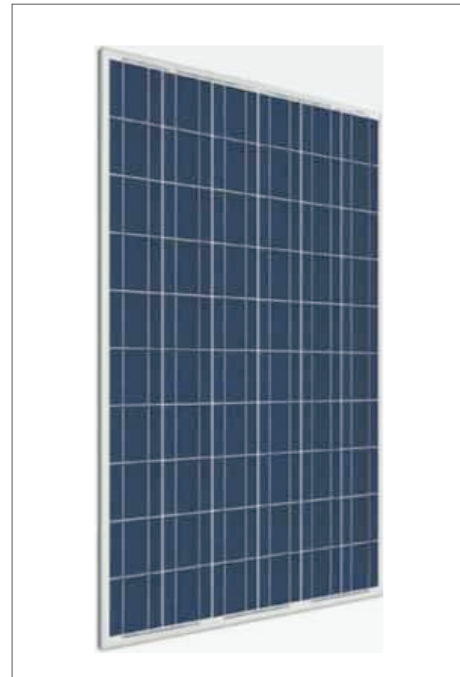



## ELECTRICAL CHARACTERISTICS

Type	KF-60P6-200W	KF-60P6-205W	KF-60P6-210W	KF-60P6-215W	KF-60P6-220W
Nominal Out	200W	205W	210W	215W	220W
Power Tolerance	(0, +5) W	(0, +5) W	(0, +5) W	(0, +5) W	(0, +5) W
Voltage At Pmax(Vmp)	29.5V	29.6V	29.7V	29.82V	29.8V
Current At Pmax(Imp)	6.75A	6.93A	7.07A	7.23A	7.40A
Open Circuit Voltage(Voc)	36.0V	36.0V	36.1V	36.3V	36.5V
Short Circuit Current(Isc)	7.82A	7.82A	7.83A	7.98A	8.12A
Maximum System Voltage	1000V(TUV) ; 600V(UL)				
Cell Efficiency	14.12%	14.47%	14.83%	15.18%	15.53%
Module Efficiency	12.25%	12.56%	12.87%	13.17%	13.48%


## MECHANICAL CHARACTERISTICS

Dimensions	1640x992x40mm
Weight	19.93kg
Junction Box	Ip65 Rated
Type Of Connector	Mc4 Or Compatible Connector
Solar Cells	60(6x10) Poly-crystalline Cells 156mm
Frame	Anodized Aluminum Alloy


## TEMPERATURE CHARACTERISTICS

Noct	44.4±2°C
Temperature Coefficient Of Pmax	-0.46%/°C
Temperature Coefficient Of Voc	-0.346%/°C
Temperature Coefficient Of Isc	0.065%/°C
Operating Temperature	-40~+80°C


## DIMENSIONS

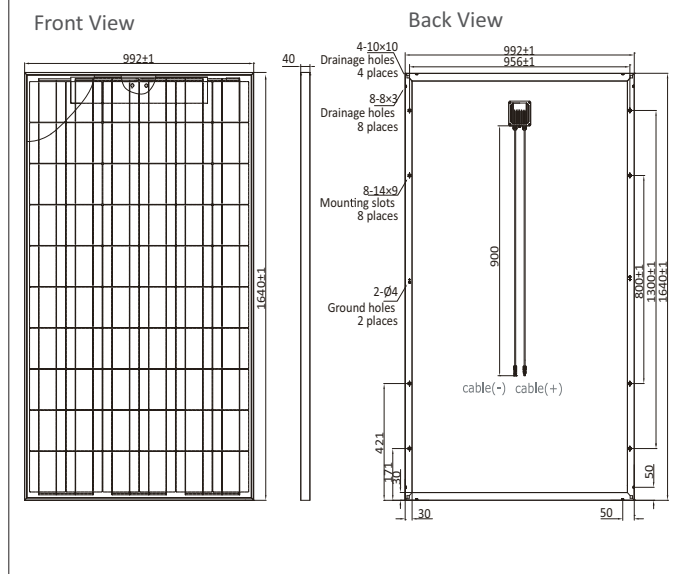

## IV CURVE AT DIFFERENT IRRADIANCE LEVELS

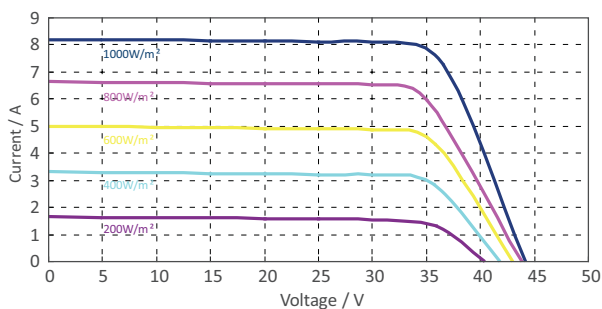

## Temperature dependence of Isc, Voc and Pmax



## Irradiance dependence of Isc, Voc and Pmax (cell temperature: 25°C)

