





## THE ANTARIS M6-SERIES



-  ANTARIS modules are manufactured from high-quality components for worldwide use in grid-connected systems.
-  Continuous quality controls throughout the entire production process
-  Production using state-of-art quality assurance technology
-  Quality assurance by an external, independent testing institute based in Germany

**On the AS M6 series, we grant a 30-year performance guarantee and a 12-year product guarantee.**



Also available  
**IN BLACK**

**AS M6 SERIES**



**ANTARIS SOLAR GmbH & Co. KG**  
Head office  
63735 Aschaffenburg, Germany

Phone: +49 (0) 6095 950-441  
Fax: +49 (0) 6095 950-544  
Email: [info@antaris-solar.com](mailto:info@antaris-solar.com)  
Internet: [www.antaris-solar.com](http://www.antaris-solar.com)

**LIVING BY THE SUN!**

### ELECTRICAL PROPERTIES (STC\*)

ANTARIS SOLAR AS M6 series		M6 300	M6 305	M6 310
Rated output (P <sub>max</sub> )	[Wp]	300	305	310
Voltage with P <sub>max</sub> (V <sub>mpp</sub> )	[V]	36,3	36,4	36,5
Current with P <sub>max</sub> (I <sub>mpp</sub> )	[A]	8,27	8,38	8,49
Open circuit voltage (V <sub>oc</sub> )	[V]	45,7	45,9	46,1
Short circuit current (I <sub>sc</sub> )	[A]	8,63	8,71	8,79
Output tolerance to rated output		0 - 5 W		
Max. reverse current (I <sub>r</sub> )	[A]	15		
Max. system voltage	[V]	IEC 1000		
Degree of module effectiveness [%]		15,5	15,7	16,0
Application category		(as per IEC 61730) A		
Fire category		(as per IEC 61730) C(UL)		
Protection rating		(as per IEC 61730) II		

STC \* (Standard test conditions): Irradiation 1000 W/m<sup>2</sup>, module temperature 25°C, air mass 1.5

### ELECTRIC OUTPUT WITH NOCT

ANTARIS SOLAR AS M6 series		M6 300	M6 305	M6 310
Rated output (P <sub>max</sub> )	[Wp]	227,1	230,9	234,6
Voltage with P <sub>max</sub> (V <sub>mpp</sub> )	[V]	32,5	32,6	32,7
Current with P <sub>max</sub> (I <sub>mpp</sub> )	[A]	6,99	7,08	7,17
Open circuit voltage (V <sub>oc</sub> )	[V]	41,7	41,9	42,1
Short circuit current (I <sub>sc</sub> )	[A]	7,34	7,41	7,48

NOCT: Irradiation 800 W/m<sup>2</sup>, air 20°C, module temperature 45 +/- 2°C, air mass 1.5

### TEMPERATURE PROPERTIES


NOCT**	45 +/- 2°C
Temperature coefficient P <sub>max</sub>	-0.445 %/ °C
Temperature coefficient V <sub>oc</sub>	-0.334 %/ °C
Temperature coefficient I <sub>sc</sub>	0.05 %/ °C
Operating temperature	from -40 to +85°C

NOCT\*\*: Nominal cell operating temperature sun 800 W/m<sup>2</sup>, air 20°C, wind speed 1m/s


### MECHANICAL PROPERTIES

Solar cells	72 (6x12) monocrystalline silicon solar cells, 156 x 156 mm
Front surface	3.2 mm thick, low-iron solar glass
Rear side cover	Film compound (EVA/TPT)
Frame	Anodised aluminium
Diodes	6 bypass diodes
Junction box	Protection degree IP65
Plug-in connector	MC4 compatible
Cables	Length: 1250 mm / profile: 4 mm <sup>2</sup>
Dimensions	1956 x 992 x 45 mm 77 x 39.1 x 1.77 inches
Weight	24 kg / 52,91 lbs
Snow load	5400 Pa
Wind load	200 kg/m <sup>2</sup> (60 m/s)
Hail test	227 g steel balls from 1 m height
Performance guarantee	10 years at 90 %, 30 years at 80 % of the min. rated output

### SCHEMATIC DIAGRAMM

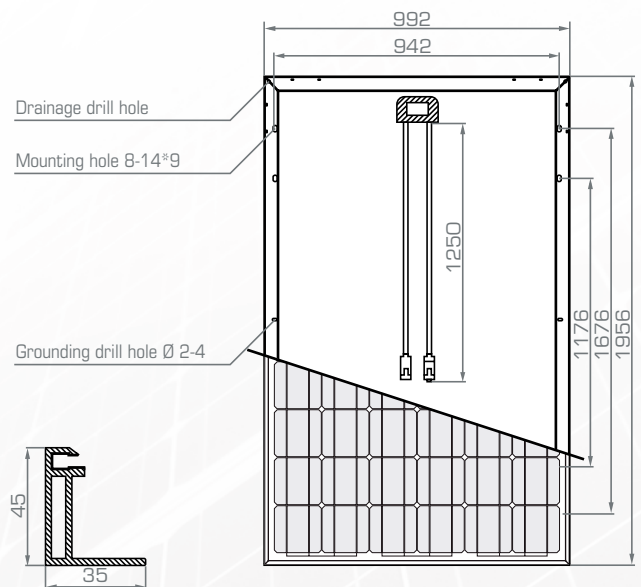

### CURRENT-VOLTAGE CHARACTERISTIC CURVE

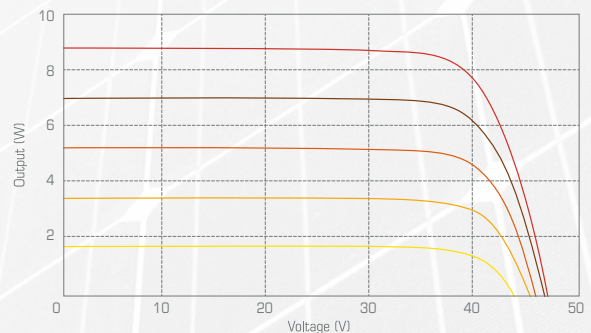

— 1000 W/m<sup>2</sup> IV Data — 800 W/m<sup>2</sup> IV Data — 600 W/m<sup>2</sup> IV Data — 400 W/m<sup>2</sup> IV Data — 200 W/m<sup>2</sup> IV Data