

200W, 205W, 210W, 215W, 220W, 225W, 230W, 235W Polycrystalline Solar Panels

Fortune CP Polycrystalline modules are advanced, utilizing polycrystalline cells with anti-reflective coating. Features include: plug and play connectors, high transmission, tempered glass and bypass diodes protection.

The modules have been designed for both grid and off-grid applications such as large commercial systems, residential systems, telecommunication, and many more.

These modules offer superior performance, larger high efficiency cells, providing superior power density.

Applications

- Grid-tie residential systems
- Power plants/solar farms
- Off-grid home/industrial systems
- Water pumping
- Telecommunication
- Rural Electrification

Performance, Warranties

Rated power : 200W to 235W
Power tolerance : 1.5%


10 year warranty - At least 90% of rated output
25 year warranty - At least 80% of rated output
5 years materials and workmanship



SPECIFICATIONS

Module Type		FCSR235P	FCSR230P	FCSR225P	FCSR220P	FCSR215P	FCSR210P	FCSR205P	FCSR200P
		235W	230W	225W	220W	215W	210W	205W	200W
Maximum Power	Pm(W)	239.9	234.9	229.9	224.9	219.9	214.9	209.9	204.9
Tolerance	(%)	±1.5	±1.5	±1.5	±1.5	±1.5	±1.5	±1.5	±1.5
Open Circuit Voltage	Voc(V)	36.72	36.60	36.42	36.06	36.00	35.94	35.94	35.88
Short Circuit Current	Isc(A)	8.23	8.17	8.10	7.95	7.83	7.60	7.47	7.35
Maximum Power Voltage	Vm(V)	30.60	30.48	30.36	30.12	29.94	29.64	29.58	29.28
Maximum Power Current	Im(A)	7.68	7.55	7.41	7.30	7.18	7.09	6.93	6.83
Module Efficiency	(%)	14.35	14.04	13.74	13.43	13.13	12.82	12.52	12.21
Solar Cell Efficiency	(%)	16.12	15.87	15.62	15.12	14.87	14.37	14.12	13.75
Cell Type	(mm)	156×156 (Poly-Crystalline Silicon)							
Number of Cells	(Pcs)	60							
Maximum System Voltage	(V)	DC1000							
Temp. Coeff. of Voc	(%/°C)	-0.32							
Temp. Coeff. of Isc	(%/°C)	0.04							
Temp. Coeff. of Pm	(%/°C)	-0.35							
Operating Temperature	(°C)	-40 to 85							
Nominal Operating Cell Temperature(NOCT)	(°C)	45±2							
Max.Series Fuse	(A)	15							
Insulation	(MΩ)	50							
Wind Bearing	(Pa)	≤ 5400							
Pressure Bearing	(Pa)	≤ 2400							



PHYSICAL CHARACTERISTICS Unit:mm

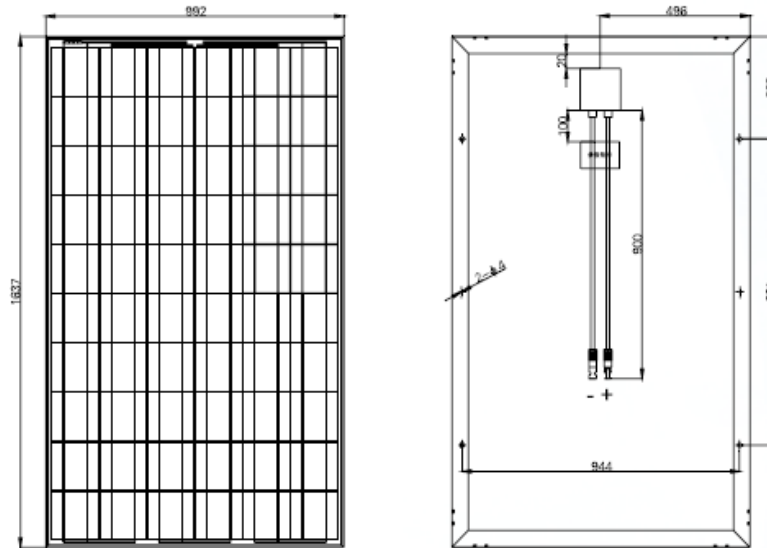

Dimensions	(mm)	1637×992×48
Weight	(kg)	20

Packing Configuration	2 pcs/carton
Quantity/Pallet	36 pcs/pallet
Loading Capacity	216 pcs/20ft container
	468 pcs/40ft container

ELECTRICAL CHARACTERISTICS

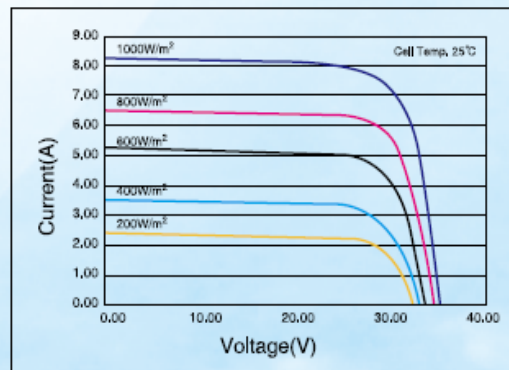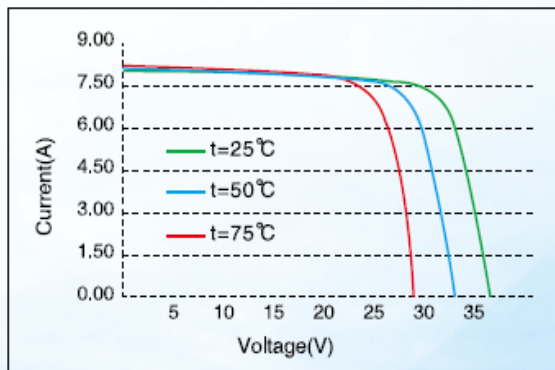

Panels are manufactured by a factory with the following certificates



Regus House, Victory Way, Admirals Park
Dartford, DA2 6QD, Kent, UK

Tel: (44)1322303070 Fax: (44)1322303072

Email: sales@fortunecp.co.uk

Websites: www.fortunecp.co.uk, www.solar2renewableenergy.com