

180W, 185W, 190W, 195W, 200W Mono-crystalline Solar Panels

Fortune CP Mono-crystalline modules are advanced, utilising mono-crystalline cells with anti-reflective coating. Features include: plug and play connectors, high transmission, tempered glass and bypass diodes protection.

The modules have been designed for both grid and off-grid applications such as large commercial systems, residential systems, telecommunication, and many more.

These modules offer superior performance, larger high efficiency cells, providing superior power density.

Applications

- Grid-tie residential systems
- Power plants/solar farms
- Off-grid home/industrial systems
- Water pumping
- Telecommunication
- Rural Electrification

Performance, Warranties

Rated power : 180W to 200W
Power tolerance : 1.5%

- 10 year warranty - At least 90% of rated output
- 25 year warranty - At least 80% of rated output
- 5 years materials and workmanship





SPECIFICATIONS

Module Type		FCSR200M	FCSR195M	FCSR190M	FCSR185M	FCSR180M
		200W	195W	190W	185W	180W
Maximum Power	Pm(W)	204.9	199.9	194.9	189.9	184.9
Tolerance	(%)	±1.5	±1.5	±1.5	±1.5	±1.5
Open Circuit Voltage	Voc(V)	30.25	30.12	30.00	29.86	29.76
Short Circuit Current	Isc(A)	8.40	8.32	8.26	8.18	8.14
Maximum Power Voltage	Vm(V)	25.16	25.00	24.77	24.38	24.19
Maximum Power Current	Im(A)	7.95	7.80	7.67	7.59	7.44
Module Efficiency	(%)	15.27	14.89	14.51	14.13	13.75
Solar Cell Efficiency	(%)	17.63	17.13	16.63	16.13	15.88
Cell Type	(mm)	156×156 (Mono-Crystalline Silicon)				
Number of Cells	(Pcs)	48				
Maximum System Voltage	(V)	DC1000				
Temp. Coeff. of Voc	(%/°C)	-0.31				
Temp. Coeff. of Isc	(%/°C)	0.03				
Temp. Coeff. of Pm	(%/°C)	-0.37				
Operating Temperature	(°C)	-40 to 85				
Nominal Operating Cell Temperature(NOCT)	(°C)	45±2				
Max.Series Fuse	(A)	15				
Insulation	(MΩ)	50				
Wind Bearing	(Pa)	≤ 5400				
Pressure Bearing	(Pa)	≤ 2400				

STC(Standard Test Conditions): 1000W/m² AM=1.5 25°C



PHYSICAL CHARACTERISTICS Unit:mm

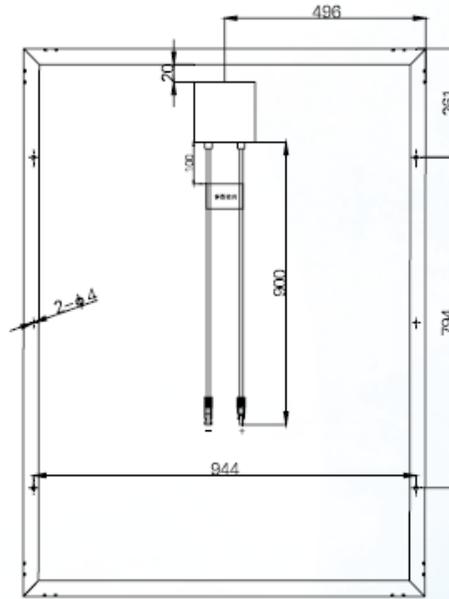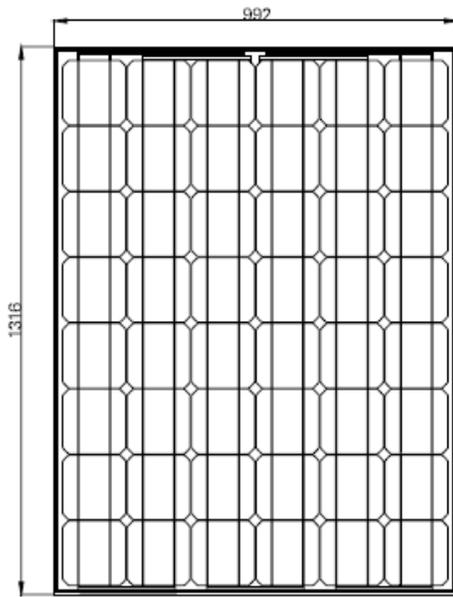

Dimensions	(mm)	1316×992×48
Weight	(kg)	15.6

Packing Configuration	2 pcs/carton
Quantity/Pallet	36 pcs/pallet
Loading Capacity	288 pcs/20ft container
	576 pcs/40ft container

ELECTRICAL CHARACTERISTICS

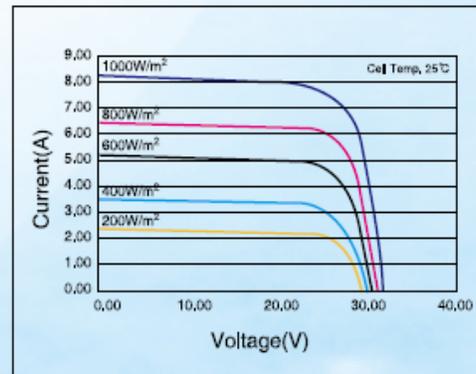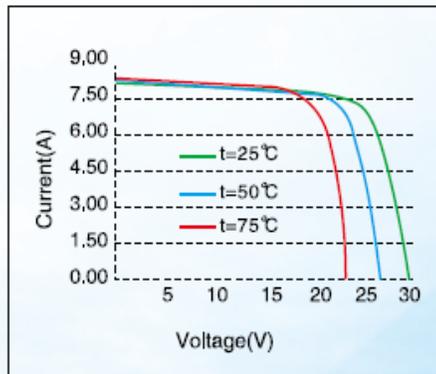

Panels are manufactured by a factory with the following certificates



Regus House, Victory Way, Admirals Park
 Dartford, DA2 6QD, Kent, UK
Tel: (44)1322303070 **Fax:** (44)1322303072
Email: sales@fortuneCP.co.uk
Websites: www.fortuneCP.co.uk