




ORI-35M

Small Size 35 Watt Monocrystalline Solar Module

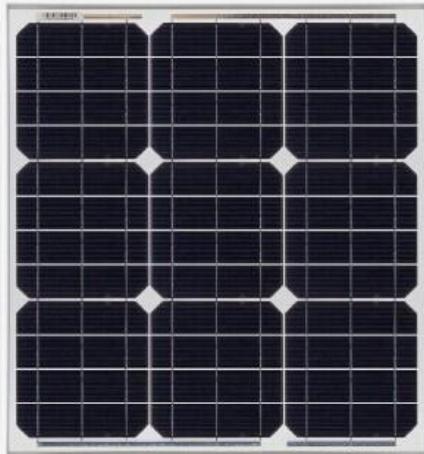

Features

High power output module conversion efficiency with stable cell production technology.

Anti-reflective and anti-soiling surface reduces power loss from dirt and dust.

Outstanding performance in low-light irradiance environments.

Certified to withstand: wind load and snow load.

High salt mist and ammonia resistance certified by TUV Rheinland.



Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications



ORI-35M

Electrical Characteristics

Model	ORI-35M
Optimum Operating Voltage (Vmp)	17.82V
Optimum Operating Current (Imp)	1.96A
Open-Circuit Voltage (Voc)	22.54V
Short-Circuit Current (Isc)	2.10A
Cell Efficiency (%)	16.76%
Module Efficiency (%)	12.47%
Tolerance Wattage (e.g. +/-3%)	0 ~ +3%
Maximum Power(W)	35 Watt
NOCT	47°C +/- 2°C

General Characteristics


Solar Cell	156*38.3 (39.7) MONO
Number of Cells	3*12
Dimension	545mm*515mm*28mm
Weight	3.4KG
Front Glass	3.2mm tempered glass
Frame	28#
Allowable Hail Load	23m/s, 7.53 g
Classification	TPT backing, FF 70-76%,-40°C to +85°C

Temperature Coefficients

Temperature Coefficient of Im (%/°C)	+0.04
Temperature Coefficient of Pmax (%/°C)	-0.47
Temperature Coefficient of Voc (%/°C)	-0.38
Temperature Coefficient of Isc (%/°C)	+0.04
Temperature Coefficient of Vm (%/°C)	-0.38

Packing Solution

Packing	Wooden Box
Pieces per container	70pcs/Pallets

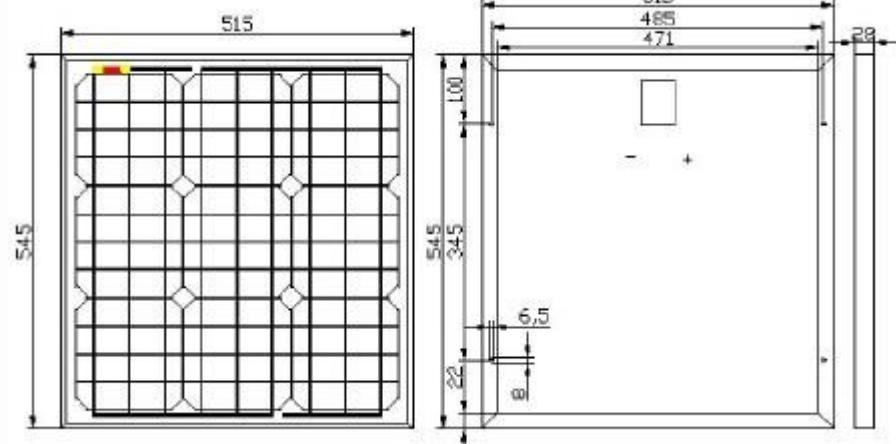

Engineering Drawing