




# BEM 310Wp

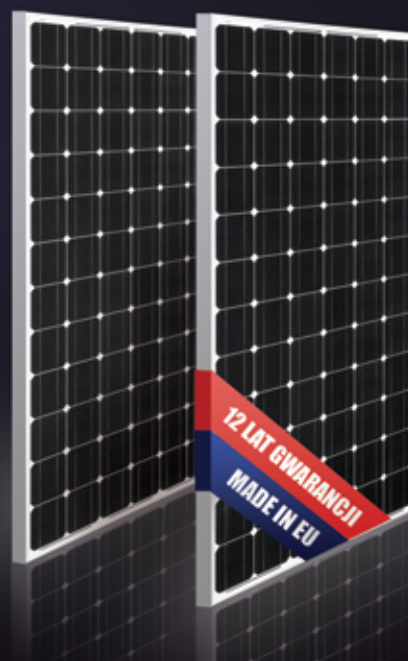

-  25 year linear performance warranty
-  100 % electroluminescence inspection
-  Guaranteed positive power tolerance
-  Maximum 5400 Pa snow load
-  IP67 junction box available, long-term weather endurance
-  Innovative solution: anti-reflective coating for high sunlight absorption
-  Potential Induced Degradation FREE
-  High quality components
-  packing system to avoid micro cracks

IRRADIANCE DEPENDENCE				
[W/m <sup>2</sup> ]	1000	800	600	400
Isc	0%	-19,6%	-39,5%	-59,2%
Voc	0%	-1,38%	-3,05%	-5,90%

STC 1000 W/m<sup>2</sup>, 25 °C, AM 1,5

## ELECTRICAL CHARACTERISTICS

Maximum power [Pmax]	310
Cells	Monocrystalline Si
Size	156 x 156 mm
Nr of cells	72
Short circuit current [Isc]	9,05
Open circuit voltage [Voc]	45,65
Maximum power current [Imax]	8,51
Maximum power voltage [Vmax]	36,45
Module efficiency	16 %
Maximum system voltage	1000 V DC
Tolerance	0 +4,99
Temperature coefficient current TcI	+0,03 %/°C
Temperature coefficient voltage TcV	-0,32 %/°C
Power temperature coefficient TcP	-0,39 %/°C
NOCT(800 W/m <sup>2</sup> , 20°C, AM 1.5, 1m/s)	43 °C




## QUALIFICATION TEST PARAMETERS

Maximum load	IEC 5400 Pa
Application class	A

## PHYSICAL CHARACTERISTICS

Length	1960 mm
Width	992 mm
Thickness	38 mm
Weight	25 kg
Junction box	IP 65



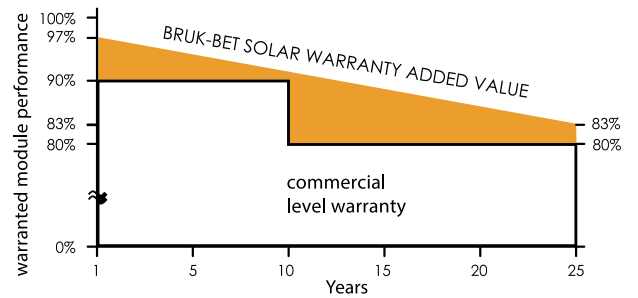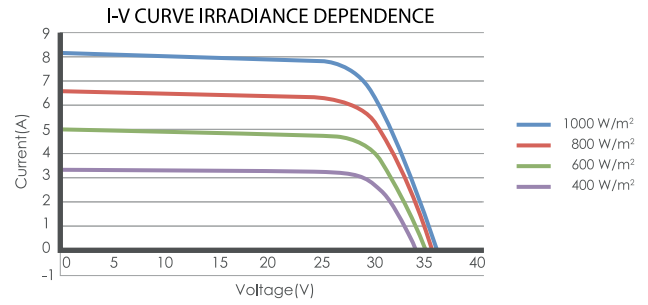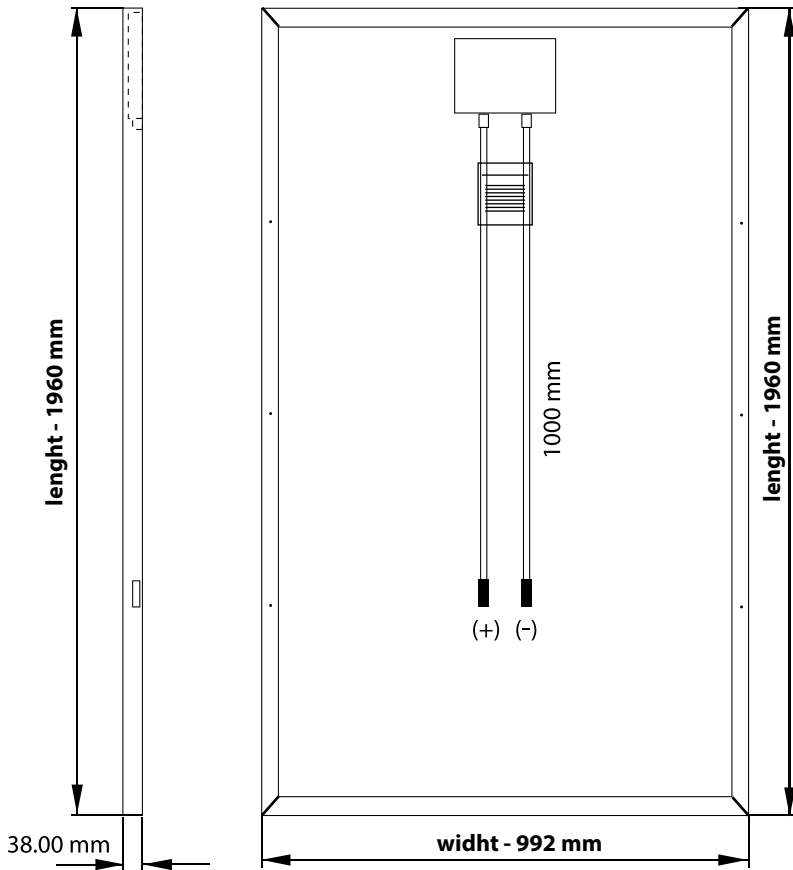




## AVAILABLE COLORS

TERRACOTTA

WHITE

TRANSPARENT

BLACK

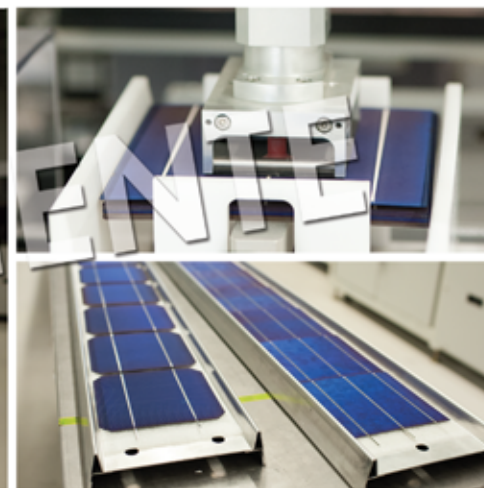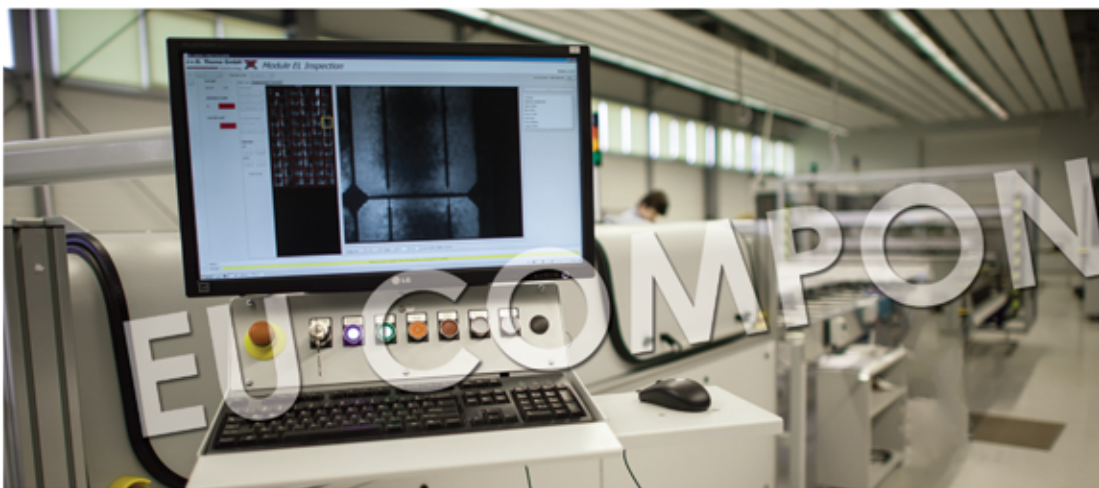

**Bruk-Bet Sp. z o.o. Headquarters:**  
 Nieciecza 199,33-240 Żabno  
 tel. + 48 14 637 77 77  
 fax + 48 14 637 77 78

**Photovoltaic Module Manufacturing Plant:**  
 ul. Mroźna 8, 33-102 Tarnów  
 tel. +48 14 632 08 20  
 fax +48 14 632 08 21

[www.solar.bruk-bet.pl](http://www.solar.bruk-bet.pl), e-mail: [solar@bruk-bet.pl](mailto:solar@bruk-bet.pl)