



常州嘉阳新能源科技有限公司

Changzhou Sunday Energy Co.,Ltd

Tel:+86 519 68081229 Website: [www.sundayenergy.cn](http://www.sundayenergy.cn)

Fax:+86 519 68081230 Email:[sales@sundayenergy.cn](mailto:sales@sundayenergy.cn)

Add:No.888,Chengfeng Road,Jintan City,Jiangsu Province

---

## SOLAR MODULE

### SDM5-200

#### FEATURES


1. Low voltage-temperature coefficient enhances high-temperature operation.
2. Exceptional low-light performance and high sensitivity to light across the entire solar spectrum maximize yearly energy delivery.
3. 25-year limited warranty on power output, 2-year Limited warranty on materials and workmanship.

#### MATERIALS

1. Highest quality, high-transmission tempered glass provides enhanced stiffness and impact resistance.
2. Advanced EVA encapsulation system with triple-layer back sheet meets the most stringent safety requirements for high-voltage operation.
3. A sturdy, anodized aluminum frame allows modules to be easily roof-mounted with a variety of standard mounting systems.
4. Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells.

#### BENEFITS

1. Manufactured in an ISO9001:2000 certified plant.
2. High efficiency, high safety, high reliability.
3. Output power tolerance of +/-3%.
4. CE、IEC、TUV、UL、MC

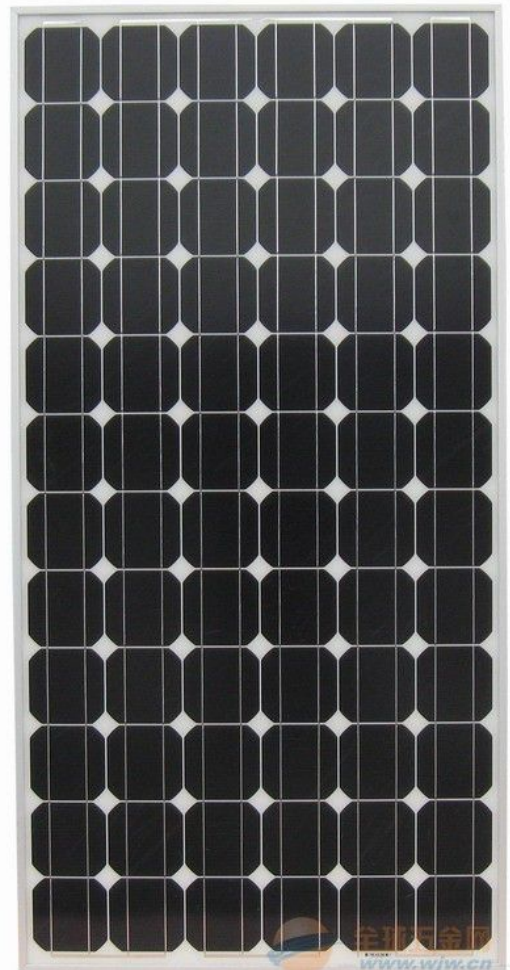

## ELECTRICAL SPECIFICATIONS

Model type	<b>SDM5-200</b>
Peak power (Pmax)	200W
Cell Efficiency	18.5%
Module Efficiency	15.7%
Maximum power voltage (Vmp)	37.65V
Maximum power current (Imp)	5.31A
Open circuit voltage (Voc)	45.2V
Short circuit current (Isc)	5.75A
Power Tolerance	-1 to +3%
Maximum system voltage	DC 1000V
Normal Operating Cell Temperature	44.4±2°C
Series fuse rating (A)	10A
Number of bypass diode	3


## MECHANICAL SPECIFICATIONS

Cell type	125mm x 125mm
Number of cells	72 cells in series
Weight	15.9 kg (35.05 lbs)
Dimensions	1580×808×50 mm (62.20×31.81×1.97 inch)
Max Load	5400Pascals ( 112 lb/ft <sup>2</sup> )

## TEMPERATURE COEFFICIENT


Temp. Coeff. of Isc (TK Isc)	0.042 %/°C
Temp. Coeff. of Voc (TK Voc)	-0.336 %/°C
Temp. Coeff. of Pmax (TK Pmax)	-0.47 %/°C

## PHYSICAL CHARACTERISTICS Unit:mm (inch)

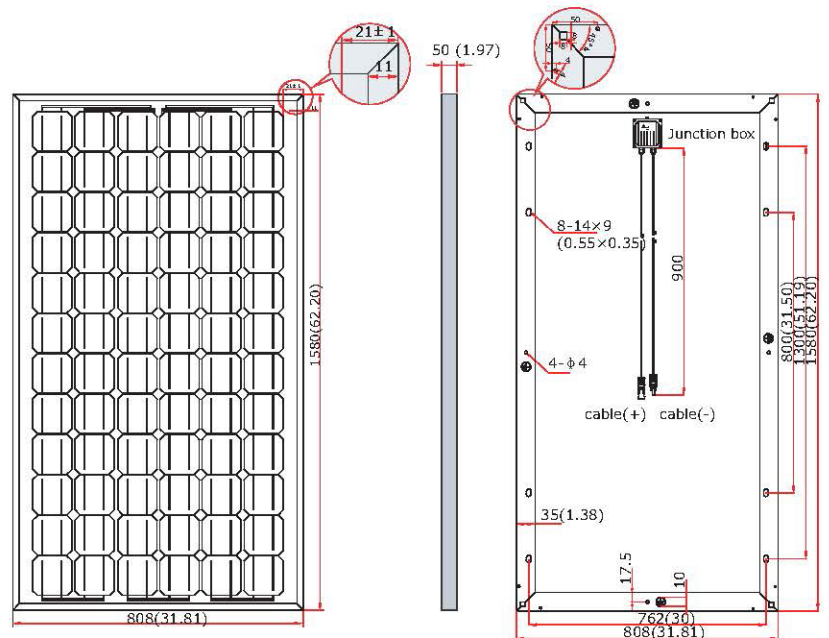


## ELECTRICAL CHARACTERISTICS


Electrical performance  
(cell temperature:25°C)

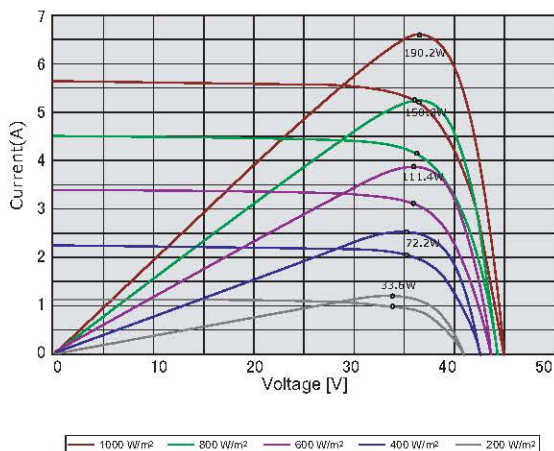

Temperature dependence of Isc,  
Voc and Pmax

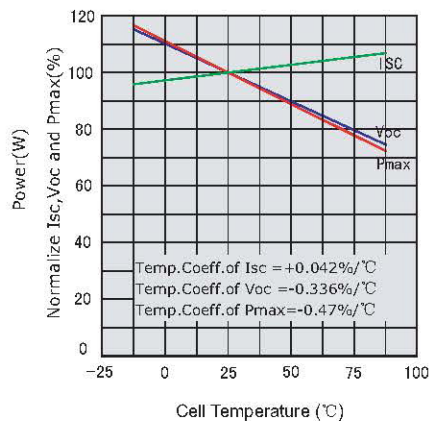

Irradiance dependence of Isc,  
Voc and Pmax (cell temperature:25°C)

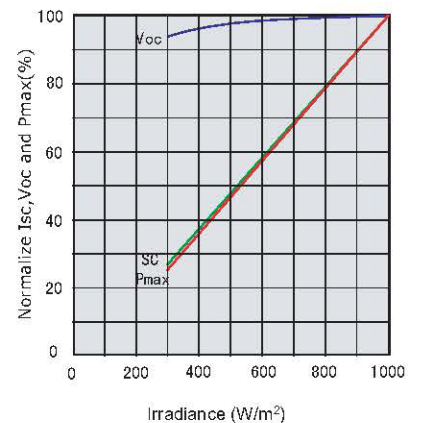

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m<sup>2</sup> solar irradiance, 1.5 Air Mass, and cell temperature of 25 °C.  
The NOCT is obtained under the Test Conditions : 800 W/m<sup>2</sup>, 20°C ambient temperature, 1 m/s wind speed, AM 1.5 spectrum.

Please contact [sales@sundayenergy.cn](mailto:sales@sundayenergy.cn) for technical support. The parameters may be changed without notice due to product improvement.