




100w Polycrystalline Solar Module

- Made with 36 high efficiency 2/3 polycrystalline cells
- Robust anodized aluminum frame with mounting holes will stand up to years of abuse without corrosion or weakening
- Perfect for off-grid uses like battery charging and other 12V applications
- Industry-standard MC-4 connectors for easy plug-and-play use

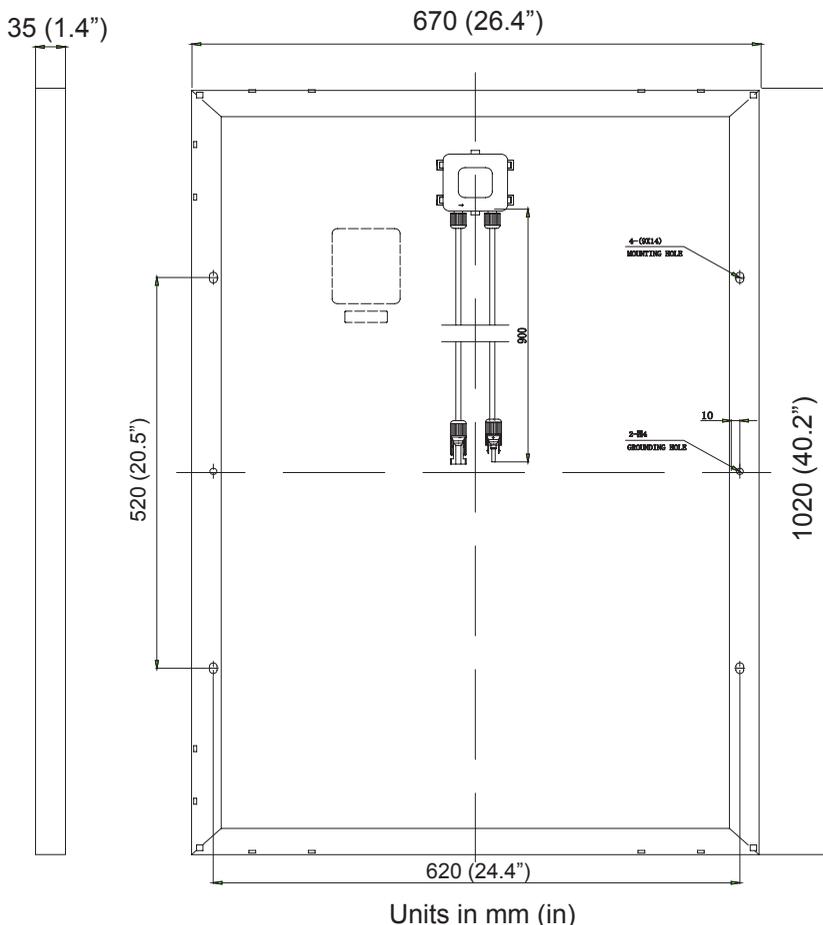

ZBR-100P	
STC Power	100 w
Vmp	17.8 V
Imp	5.62 A
Voc	21.2 V
Isc	6.02 A
Module Efficiency	14.6%
Max Sys Voltage	600 V
Max Series Fuse	10 A
Tolerance	± 3%
Dimensions	40.2 x 26.4 x 1.4 in
Weight	9.5 kg / 21 lbs
Connector Type	MC-4
# cells	36 (156x104mm)
Temperature Coefficients	
NOCT	48 ± 2°C
Pm	-0.45 %/°C
Voc	-0.35 %/°C
Isc	+0.05 %/°C

info@zebra-energy.com