

## PRODUCT SPECIFICATION

Type Of Module	SY-250WP
Maximum Power (W)	250
Tolerance (%)	0/+3%
Open Circuit Voltage (V)	37.5
Short Circuit Current (A)	8.56
Maximum Power Voltage (V)	30.8
Maximum Power Current (A)	8.12
Module Efficiency (%)	15.3
Solar Cell Efficiency (%)	17.2
Series Fuse Rating (A)	15
Terminal Box	IP65
Maximum system voltage (V)	DC1000
Operating Temperature(°C)	-40°C ---85°C

## PRODUCT FEATURE

- Bypass diode minimizes the power drop by shade.
- White tempered glass ,EVA resin,weather proof film and anodized aluminum frame to provide efficient protection from the severest environmental conditions.
- Waterproof.Perfect for grid applications.
- Product guarantee 10 years.




## Quality Assurance

- Electrical Insulation test
- Outdoor exposure test
- Hot-spot endurance test
- UV-exposure
- Thermal cycling test
- Humidity freeze test
- Damp heat Test
- Robustness of terminations test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test

# Electrical Characteristics

Current-Voltage & Power-Voltage characteristics various irradiance levels

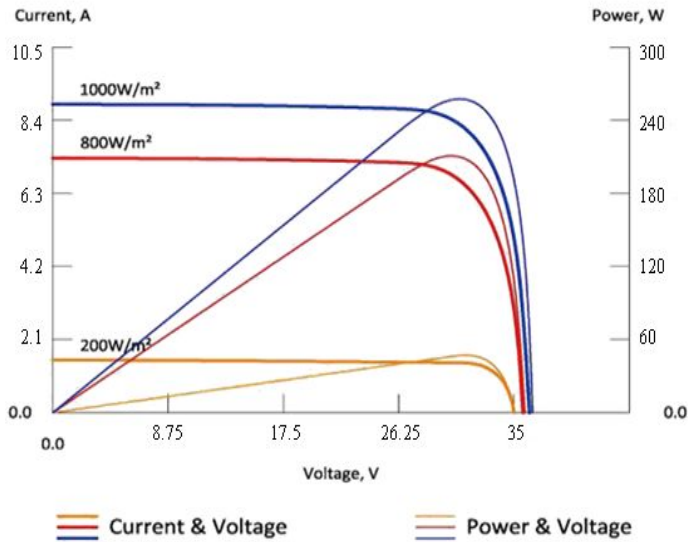

Electric Performance Typical Performance Characteristics		
Current Temperature Coefficient	%/°C	+0.06
Voltage Temperature Coefficient	%/°C	-0.34
Power Temperature Coefficient	%/°C	-0.47
Performance Warranty : 90%output , 12 years 80%output, 25 years		

# Physical Specifications

Dimension: 1650\*992\*40

Weight: 17KG/PCS


Packing : 2pcs in one carton

### Loading Capacity:

264 pcs/ 20'Container

586 pcs/ 40' Container

690 pcs/ 40'HQ

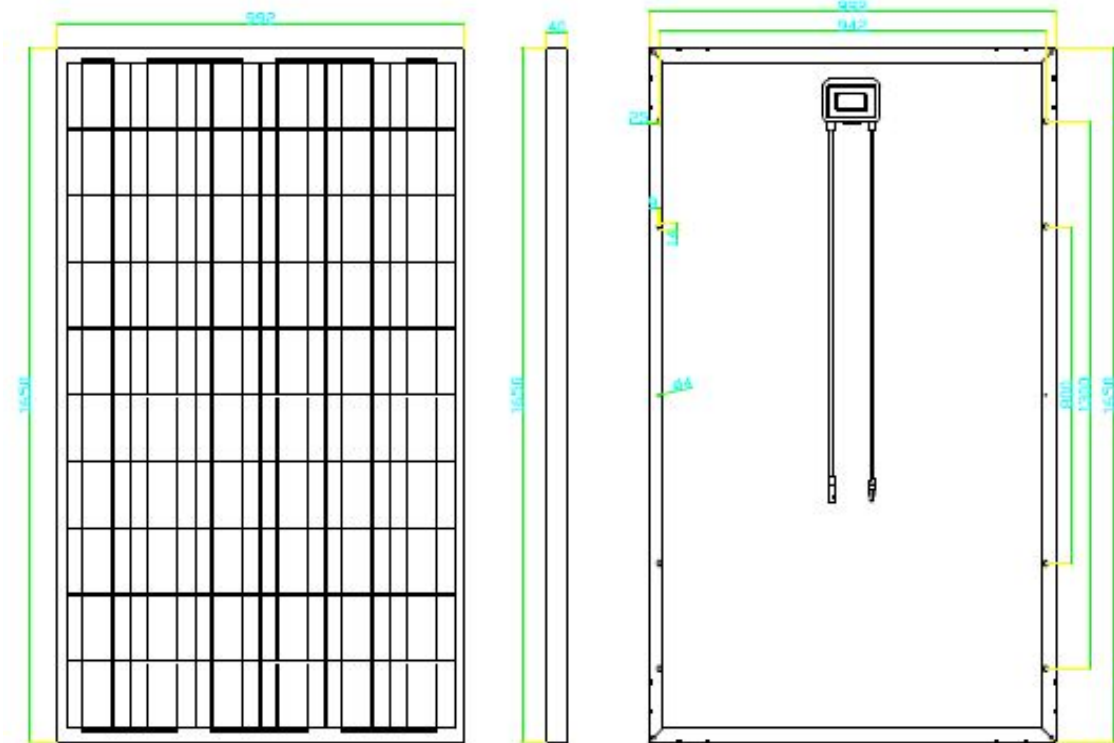

**SHENZHEN SUOYANG NEW ENERGY CO.,LTD.**

**ADD.: No.5 Building,Juhui Mold Industrial area,Tianliao Road,Guangming New Districte ,Shenzhen ,China**

**Tel:+86- 755 3369 9191**

**Fax: +86-755 3369 9194**

**Mobile:0086-13723454981**

**Website: www.szuoyang.com**

**Email: joanne@szsuoyang.com.cn/joanne.solar@hotmail.com**

