


# PN36-156P-5w

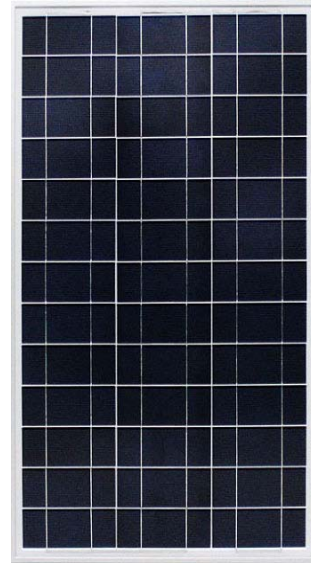

## Temperature and coefficients

NOCT	45±3°C
Pmax temperature coefficient	-0.47%/°C
Voc temperature coefficient	-0.38%/°C
Isc temperature coefficient	-0.04%/°C
NOCT:Nominal Operation Cell Temperature	

## Characteristics

Model	PN36-156P-5w	PN36-156P-10w	PN36-156P-15w	PN36-156P-20w
Optimum operating voltage(Vmp)	17.28	17.42	18	17.25
Optimum operating current(Imp)	0.29	0.574	0.861	1.16
Open circuit voltage(Voc)	21.57	21.58	21.63	21.45
Short circuit current(Isc)	0.32	0.539	0.96	1.33
Maximum power at STC(Pm)	5W	10W	15W	20W

The Electrical Characteristics are within ±3 Percent of the Indicated Values of Isc,Voc,and Pmax under Standard Test Conditions(Irradiance of 1000W/M<sup>2</sup>,AM 1.5 Spectrum and Cell Temperature of 25°C)

## Specifications

Cell	Poly Crystalline silicon 156*156	Poly Crystalline silicon 156*156	Poly Crystalline silicon 156*156	Poly Crystalline silicon 156*156
No.of cells and connections	36	36	36	36
Dimension of module(mm)	245*255*17*17	390*254*17*17	355*336*25*25	535*350*25*25

## Limits

Operating temperature	-40°C~ + 85°C
Maximum system voltage	600V DC