


5 Watt

MONO CRYSTALLINE MODULE 12x(77mmx31.2mm)



www.risenenergy.com
THE POWER OF RISING VALUE



Electrical Characteristics

Model	Pm(Wp)	Tolerance	Vm(V)	Im(A)	Voc(V)	Isc(A)
SYP5M	5W	+3%	5.9	0.85	7.38	0.95

Valued at STC (AM 1.5, 1000W/m², 25°C)

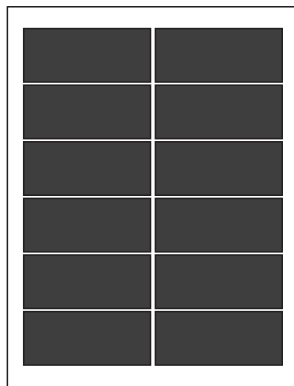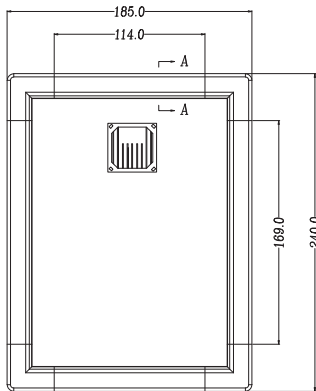

Specifications

- Number of mono crystalline solar cell 12pcsx(77mmX31.2mm)
- Aluminum frame, dimension 240x185x9mm
- Weight 0.8kg
- Temperature coefficient of VOC(β) = -0.39%/°C
- Temperature coefficient of ISC(α) = +0.033%/°C
- Temperature coefficient of Pmax = -0.44%/°C
- Bypass diodes to reduce loss in partial shadow
- IP65
- CE Standard
- Performance test data for each module