

AE POWERPLUS MODULE

AE M6-72 Series 305W-330W

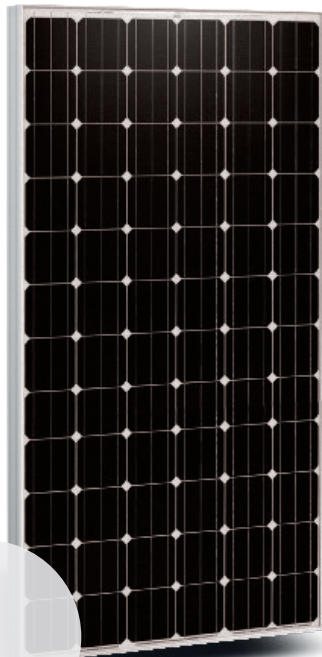


ILLUSTRATION ONLY



POWER RANGE
Plus-Sorting 0 to + 4,99Wp



PID RESISTANT
Potential induced degradation free



SALT MIST CORROSION RESISTANT
Certified for salt rich environment



SAND RESISTANT
Certified for sand rich environment



AMMONIA RESISTANT
Certified for ammonia rich environment



HIGH STRENGTHENED DESIGN
Maximum mechanical load 5400 Pa



IP67 JUNCTION BOX
Advanced water and dust proof level



GERMAN QUALITY

AE Solar photovoltaic modules are characterized by high-quality materials, best workmanship, German development and management.



LINEAR PERFORMANCE GUARANTEE

With the linear performance guarantee of 30 years and a product warranty of 12 years, AE Solar guarantees highest investment security and warranty claims.



PLUS-SORTING


Higher yield due to plus-sorting of 0 to +4.99 Wp guarantees the highest system efficiency and yield stability.



CERTIFICATES

AE Solar photovoltaic modules are not only in line with international standards, but also tested and certified under extreme stress and any environmental influences.

OUR PERFORMANCE GUARANTEE

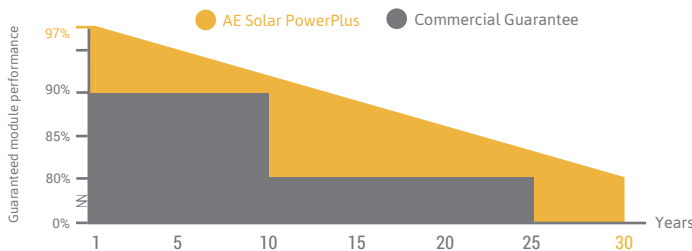

IEC 61215
IEC 61730
PERIODICAL
INCEPTION



IEC 61215
IEC 61730
PERIODICAL
INCEPTION



PID RESISTANT
SALT MIST RESISTANT
SAND RESISTANT
CORROSIVE GAS (NH₃)



AE SOLAR
Messerschmittring 54
86343 Königsbrunn
Germany

Tel.: +49 8231 97 82 68 0
Fax: +49 8231 97 82 68 9

E-Mail: info@ae-solar.com
Web: www.ae-solar.com

ELECTRICAL DATA

AE305M6-72 AE310M6-72 AE315M6-72 AE320M6-72 AE325M6-72 AE330M6-72

Parameter	Unit	AE305M6-72	AE310M6-72	AE315M6-72	AE320M6-72	AE325M6-72	AE330M6-72
Nominal power	Pm (Wp)	305	310	315	320	325	330
Open circuit voltage	Voc (V)	45.58	45.83	45.94	46.04	47.15	47.22
Short-circuit current	Isc (A)	8.83	8.91	8.94	8.97	8.99	9.01
Voltage at max power	Vmp (V)	38.23	38.45	38.74	38.92	39.02	39.17
Current at max power	Imp (A)	7.98	8.06	8.13	8.22	8.33	8.42
Module efficiency	(%)	15.77	16.03	16.28	16.54	16.80	17.06
Cells efficiency	(%)	17.91	18.20	18.49	18.79	19.08	19.37
System Voltage	(V)	1000					
Temp. coefficient Voc	(% / °C)	-0.36					
Temp. coefficient Isc	(% / °C)	0.06					
Temp. coefficient Pm	(% / °C)	-0.36					
Operating temp.	(°C)	-40 bis +85					
NOCT	(°C)	45±2					

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.

TECHNICAL DATA

Junction box	3 bypass diodes, IP67
Wire cross section (Ø, mm ²)	4.0
Cable length (mm)	Standard 900 or optional 1100
Connector type	MC4/MC4 compatible
Dimensions (L x W x H, mm)	1950 x 992 x 40
Weight (kg)	23
Cell dimensions (mm)	156 x 156
No of cells / assembly	72 / 6 x 12
Type of cells	mono-crystalline
Hail resistance	Max. Ø 28 mm at 23 m/s
Wind load	2400Pa / 244kg / m ²
Mechanical load	5400Pa / 550kg / m ²

SCALE

