

AE POWERPLUS MODULE

AE M6-60 Series 255W-280W



ILLUSTRATION ONLY

GERMAN QUALITY

255W
280W

POWER RANGE
Plus-Sorting 0 to + 4,99Wp

PID
FREE

PID RESISTANT
Potential induced degradation free



SALT MIST CORROSION RESISTANT
Certified for salt rich environment



SAND RESISTANT
Certified for sand rich environment

NH₃
S

AMMONIA RESISTANT
Certified for ammonia rich environment



HIGH STRENGTHENED DESIGN
Maximum mechanical load 5400 Pa

IP67

IP67 JUNCTION BOX
Advanced water and dust proof level



GERMAN QUALITY

AE Solar photovoltaic modules are characterized by high-quality materials, best workmanship, German development and management.



LINEAR PERFORMANCE GUARANTEE

With the linear performance guarantee of 30 years and a product warranty of 12 years, AE Solar guarantees highest investment security and warranty claims.



PLUS-SORTING


Higher yield due to plus-sorting of 0 to +4.99 Wp guarantees the highest system efficiency and yield stability.



CERTIFICATES

AE Solar photovoltaic modules are not only in line with international standards, but also tested and certified under extreme stress and any environmental influences.

OUR PERFORMANCE GUARANTEE

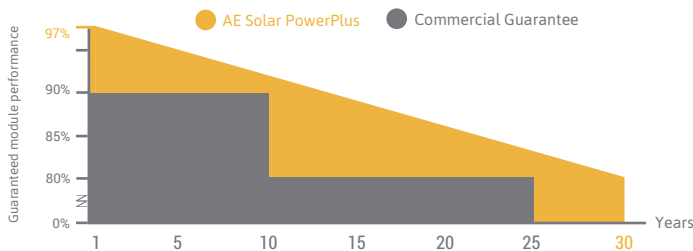

IEC 61215
IEC 61730
PERIODICAL
INCEPTION



IEC 61215
IEC 61730
PERIODICAL
INCEPTION



PID RESISTANT
SALT MIST RESISTANT
SAND RESISTANT
CORROSIVE GAS (NH₃)



AE SOLAR
Messerschmittring 54
86343 Königsbrunn
Germany

Tel.: +49 8231 97 82 68 0
Fax: +49 8231 97 82 68 9

E-Mail: info@ae-solar.com
Web: www.ae-solar.com

ELECTRICAL DATA

AE255M6-60 AE260M6-60 AE265M6-60 AE270M6-60 AE275M6-60 AE280M6-60

Parameter	Unit	AE255M6-60	AE260M6-60	AE265M6-60	AE270M6-60	AE275M6-60	AE280M6-60
Nominal power	Pm (Wp)	255	260	265	270	275	280
Open circuit voltage	Voc (V)	38.10	38.22	38.34	38.64	39.52	39.64
Short-circuit current	Isc (A)	8.86	8.91	8.96	8.99	9.01	9.07
Voltage at max power	Vmp (V)	31.86	32.10	32.40	32.52	32.64	32.94
Current at max power	Imp (A)	8.00	8.10	8.18	8.30	8.43	8.50
Module efficiency	(%)	15.67	15.98	16.29	16.60	16.90	17.21
Cells efficiency	(%)	17.97	18.32	18.67	19.02	19.37	19.73
System Voltage	(V)	1000					
Temp. coefficient Voc	(% / °C)	-0.36					
Temp. coefficient Isc	(% / °C)	0.06					
Temp. coefficient Pm	(% / °C)	-0.36					
Operating temp.	(°C)	-40 bis +85					
NOCT	(°C)	45±2					

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.

TECHNICAL DATA

Junction box	3 bypass diodes, IP67
Wire cross section (Ø, mm ²)	4.0
Cable length (mm)	900
Connector type	MC4/MC4 compatible
Dimensions (L x W x H, mm)	1640 x 992 x 40
Weight (kg)	18.5
Cell dimensions (mm)	156 x 156
No of cells / assembly	60 / 6 x 10
Type of cells	mono-crystalline
Hail resistance	Max. Ø 28 mm at 23 m/s
Wind load	2400Pa / 244kg / m ²
Mechanical load	5400Pa / 550kg / m ²

SCALE

