



# Monocrystalline Solar Module---SSxxx-60M

## SS260-60M

SS250-60M SS255-60M  
 SS245-60M SS240-60M  
 SS235-60M SS230-60M



### KEY FEATURES


- Guaranteed positive tolerance 0/+5W ensures output reliability
- Strong aluminum frames can bear snow loads up to 5400Pa and wind loads up to 2400Pa.
- Excellent performance under low light environments(morning evenings and cloudy days).
- 12 years for product defects in materials and workmanship and 25 years for 80% of warranted minimum power.
- Certifications and standards: IEC61215, IEC61730, conformity to CE.
- Manufactured according to International Quality(ISO9001).



### Electrical Characteristics

All specified Parameters are at STC 25°C Ambient, 1000W/m<sup>2</sup> irradiance and AM 1.5

Type		SS230-60M	SS235-60M	SS240-60M	SS245-60M	SS250-60M	SS255-60M	SS260-60M
Max-Power	Pm(W)	230	235	240	245	250	255	260
Module Power Range	(W)	235>Pm≥230	240>Pm≥235	245>Pm≥240	250>Pm≥245	255>Pm≥250	260>Pm≥255	265>Pm≥260
Power Tolerance	(W)	+0~+5	+0~+5	+0~+5	+0~+5	+0~+5	+0~+5	+0~+5
Max-Power Voltage	Vm(V)	30	30.1	30.2	30.3	30.4	30.5	30.6
Max-Power Current	Im(A)	7.67	7.81	7.95	8.09	8.23	8.37	8.5
Open-Circuit Voltage	Voc(V)	37.2	37.3	37.3	37.4	37.5	37.6	37.6
Short-Circuit Current	Isc(A)	8.18	8.3	8.43	8.55	8.68	8.81	8.94
Cell Efficiency	(%)	16.7	17.1	17.4	17.8	18.2	18.5	18.9
Module Efficiency	(%)	14.3	14.6	14.9	15.2	15.5	15.8	16.1
Max-System Voltage	(VDC)	1000V(IEC)						
Max.Series Fuse	(A)	15						
Pm Temperature Coefficients	(%/°C)	-0.4677						
Isc Temperature Coefficients	(%/°C)	0.0492						
Voc Temperature Coefficients	(%/°C)	-0.3374						
NOCT Nominal Operating Cell Temperature		45±2°C						
Maximum load rating		5400Pa						

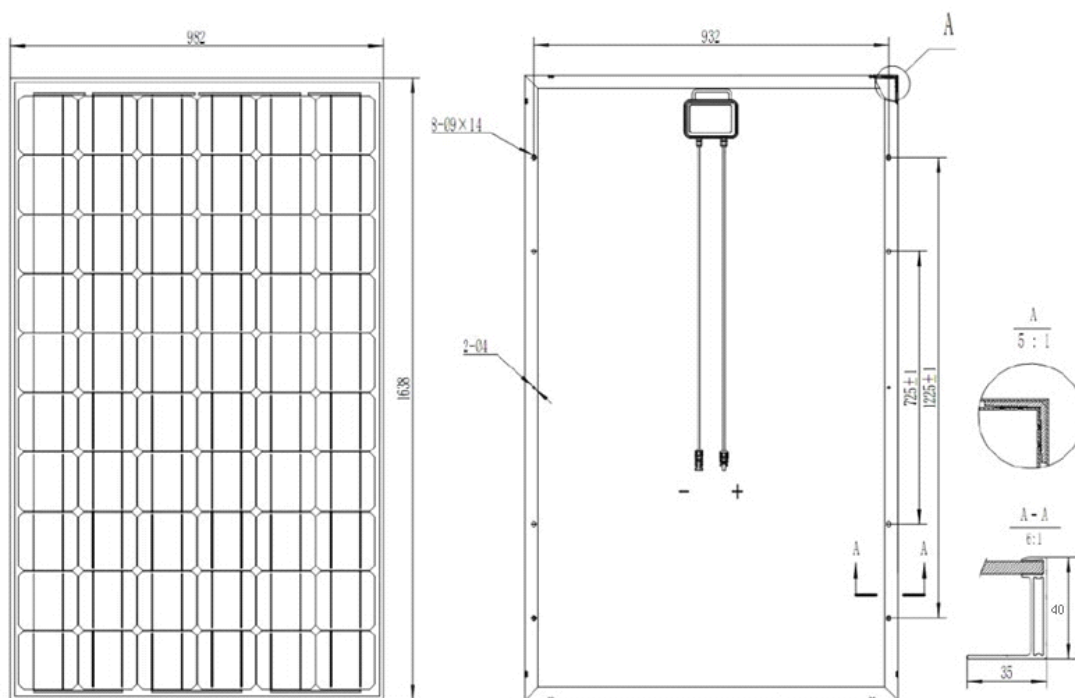


## Packaging Configuration

Packing Configuration	24 pcs/box
Quantity/Pallet	48 pcs/pallet
Loading Capacity	728 pcs/40ft(H)

## Absolute Ratings

Dielectric Insulation Voltage	3000V
Operating Temperature (°C)	-40~+85
Storage Temperature (°C)	-40~+85

## I-V Curves

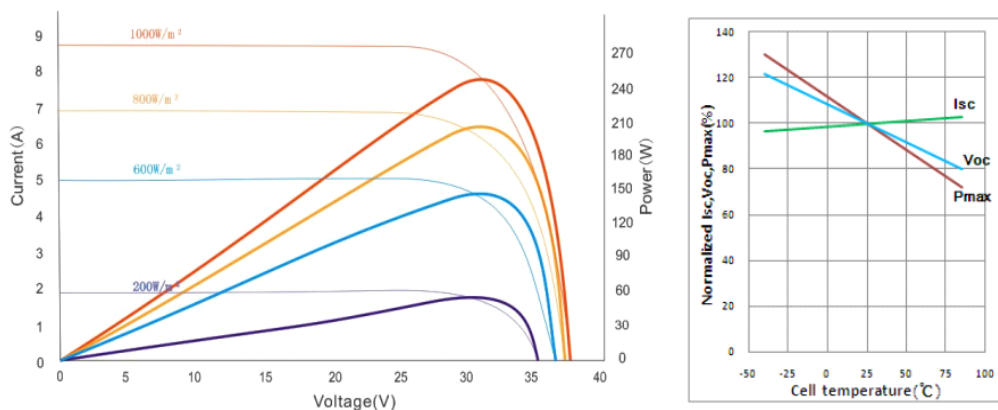

I-V Curves at different Irradiances (AM1.5 25°C)

Specifications included in this datasheet are subject to change without prior notice

## Mechanical Characteristics

Cable type, Diameter and Length	4mm <sup>2</sup> , TUV certified, 900mm
Type of Connector	Compatible with 05-6 plug
Number, type and arrangement of cells	60pcs, Mono-Crystalline Silicon(6×10)
Cell Size (mm)	156×156(D200)
Dimension (mm)	1638×982×40
Weight (Kg)	20
No.of Draining Holes in Frame	10
Glass, Type and Thickness	High Transmission, Low Iron, Tempered Glass 3.2mm

Jiangyin Shine Science and Technology Co., Ltd  
 NO.1199 Bingjiang Road(W), Jiangyin, Jiangsu,  
 214444, China

Tel: +86-510-66285883

Fax: +86-510-66285882

E-mail: [sales@shine-solar.com.cn](mailto:sales@shine-solar.com.cn)