



AC-290M/156-60S  
 AC-295M/156-60S  
 AC-300M/156-60S  
 AC-305M/156-60S  
 AC-310M/156-60S

www.axitecsolar.com

**-AXITEC-**  
 high quality german solar brand

## AXIpremium

60 cell monocrystalline  
 High performance photovoltaic module

The advantages:


- 12** Years 12 years manufacturer's warranty
- P-Max** Highest performance due to specifically selected technologies and materials
- + Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 5.400 Pa** Maximum 5400 Pa snow load
- 100%** 100% electroluminescence inspection
- Soft Grip** High stability due to AXITEC-Soft-Grip-Seam aluminium frame construction
- IP 67** High quality junction box and connector systems



Fig. similar 60M156EN161109A

**Exclusive linear AXITEC high performance guarantee!**

- 15 years manufacturer's guarantee on 90 % of the nominal performance
- 25 years manufacturer's guarantee on 85 % of the nominal performance

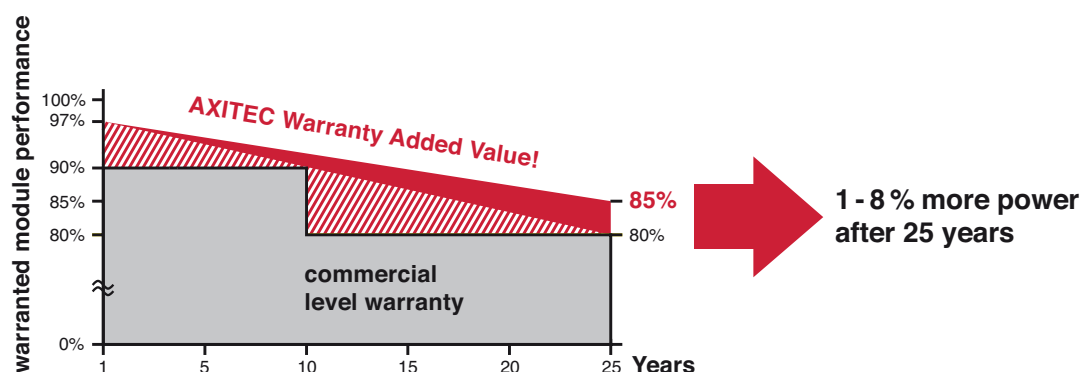

Distributed by:



**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P <sub>mpp</sub>	Nominal voltage U <sub>mpp</sub>	Nominal current I <sub>mpp</sub>	Short circuit current I <sub>sc</sub>	Open circuit voltage U <sub>oc</sub>	Module conversion efficiency
AC-290M/156-60S	290 Wp	31,71 V	9,16 A	9,70 A	39,70 V	17,83 %
AC-295M/156-60S	295 Wp	31,80 V	9,29 A	9,75 A	39,95 V	18,13 %
AC-300M/156-60S	300 Wp	32,16 V	9,34 A	9,82 A	40,08 V	18,44 %
AC-305M/156-60S	305 Wp	32,49 V	9,39 A	9,89 A	40,14 V	18,75 %
AC-310M/156-60S	310 Wp	32,88 V	9,43 A	9,98 A	40,22 V	19,05 %

**Design**

Frontside	3,2 mm hardened, low-reflection white glass
Cells	60 monocrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	35 mm silver anodized aluminium frame

**Mechanical data**

L x W x H	1640 x 992 x 35 mm
Weight	18,0 kg with frame

**Power connection**

Socket	Protection Class IP67 (3 bypass diodes)
Wire	approx. 1,1 m, 4 mm <sup>2</sup>
Plug-in system	Plug/socket IP67

**Limit values**

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m <sup>2</sup>
Reverse current feed IR	16,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than U<sub>oc</sub> may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1,5; wind speed 1 m/s; Temperature 20°C

**Temperature coefficients**


Voltage U <sub>oc</sub>	-0,30 %/K
Current I <sub>sc</sub>	0,04 %/K
Output P <sub>mpp</sub>	-0,40 %/K

**Low-light performance** (Example for AC-260M/156-60S)

I-U characteristic curve	Current I <sub>pp</sub>	Voltage U <sub>pp</sub>
200 W/m <sup>2</sup>	1,71 A	30,00 V
400 W/m <sup>2</sup>	3,41 A	30,10 V
600 W/m <sup>2</sup>	5,18 A	30,18 V
800 W/m <sup>2</sup>	6,89 A	30,36 V
1000 W/m <sup>2</sup>	8,60 A	30,42 V

**Packaging**

Module pieces per pallet	30
Module pieces per HC-container	840

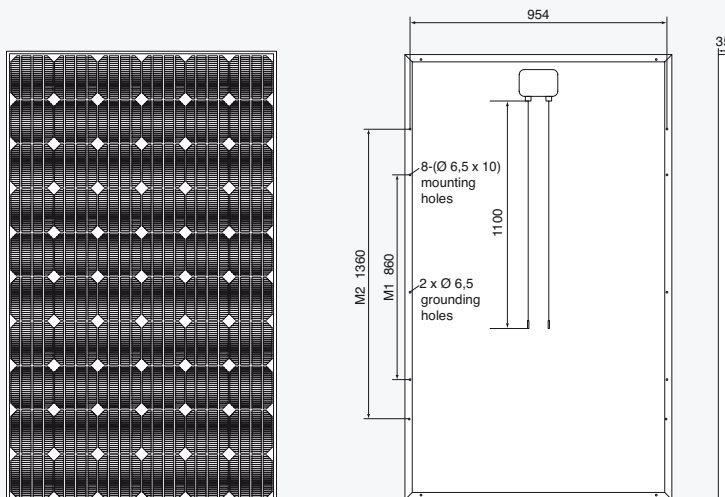

All dimensions in mm