Application Scope

- Courtyard lighting.
- Small household lighting system.
- Street lighting.
- Portable solar power.
- All small power electrical devices & small PV

Electrical Characteristics

• Characteristics	35W
Open-Circuit Voltage(Voc)	22.0V
 Optimum Circuit Voltage(Vmp) 	17.5V
Short-Circuit Current(Isc)	2.15A
 Optimum Circuit Current(Imp) 	2.00A
• Maximum Power at STC(Pmax)	35W
Module Efficiency	11.56%
 Operating Temperature 	-40℃ to +85℃
Maximum System Voltage	1000V DC
Power tolerance	±3%

• STC: Irradiance 1000W/ m², Module temperature 25 °C, AM=1.5

Mechanical Characteristics

Type of cell	Poly-crystalline 125 x 125 mm
	(5 inches)

 Dimensions 730x360x25mm (28.7x14.2x1 inches)

Weight 4.1Kg(9 lbs)

 Front Glass Low-Iron Tempered Glass

Frame **Aluminum Alloy**

 Encapsulation Glass/EVA/Cells/EVA/TPT

 Relative Humidity 0 to 100%

 Resistance 227g steel ball fall down from


1m height and 60m/s wind

Snow load 2400Pa

parameters



Size

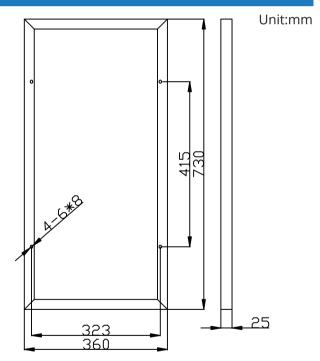

Temperature Coefficients

Maximum SeriesFuse/current rating

45 ℃ ±5 ℃
-0.45%/°C
-0.35%/°C
+0.05%/°C

Power Your Green Life!

10A

ACOPOWER Solar Panel Installation Manual

General provision

a. Installation should only be performed by qualified personnel. Each module is supplied with connectors used for system electrical connections. For the convenience of installation, ACOPOWER can provide customized cables as client required. Installers should assume all risks of injury that might occur during installation.

b . Inappropriate transport and installation may break the module and void the warranty.


Ready to work


To set up the mounting bracket of solar panel depends on its size. The bracket fixting hole must be on the basis of the pitch of hole of the solar panel module. The installation tools include: appropriate fasteners (screws, nuts) and the other installation tools.

Installation Photovoltaic Module

Grounding installation:


a. For Grounding installation, please use "Solar Panel Single Arm Universal Pole Mounting Kit" to install according to the installation instructions guide.





b. For simple installation, please use facile fixative bracket to set up. It is easy to adjust the angle. This installation can be set up on the floor or the wall.





c. For rooftop installation, please choose"Solar Panel Mounting Z Bracket "to Install on the roof and RV, Boats and other systems












Solar panel connection

The length of the cable that connected with the solar panel junction box is 1M (39.37 INCH), which should be noted the polarity of the output. The standard wiring polarity is "face terminal box: left" - "right" + ", also the polarity can be viewed on the wiring. After installation of each solar panel, series and parallel connection must be set up based on design requirements of voltage and current. Series connection is "-" and "+", "-" and "+" operator increased the charging voltage, FIG:(a). Parallel connection is "-" and "-" connected, "+" and "+" increased the charging current, FIG:(b). To use a different connection, solar panel can charge battery for 12V, 24V 36V 48V







The installation angle can be adjustable according to different geographical location, mostly associated with latitude.

ACOPOWER Team has solar design experts can provide professional and free design! Email:tech@acosolar.com