



Company

Sunworth solar, we commit ourselves to R&D, manufacture and technical innovation on PV modules and solar power system. To provide high quality products with various specifications for customers is always our pursuit.

Characteristics

- High efficiency solar cell to keep the modules efficiency reach to 16.63%.
- Positive tolerance to ensure higher output.
- Excellent performance under weak light conditions.
- Modules withstand extremely (temperature, load and impact) TUV certification.
- All modules combination and packing through stepping current to keep effectively reduce mismatch loss within.
- 100% EL test to keep higher quality.



Anodized aluminum frame withstand corrosion and damage, Special osculum can reduce destruction by water freeze.

Warranty

- 25 years power output warranty, 90% power output for 10years, and 80% power output for 25years.
- 5 years workmanship warranty.



IP65 junction box long-term weather endurance.

Quality and safety

- ISO9001:2008 certified supplier, we provide world first class solar products for clients.
- IEC 61215, IEC 61730, IEC, CQC, CGC, CE, approved.





Electrical Characteristics

Model No.	SW255P	SW260P	SW265P	SW270P
Maximum Power (Pmax)	255W	260W	265W	270W
Max-power Voltage (Vmp)	30.8V	31.1V	31.4V	31.8V
Max-power Current (Imp)	8.28A	8.37A	8.44A	8.50A
Open-circuit Voltage (Voc)	37.9V	38.1V	38.2V	38.4V
Short-circuit Current (Isc)	8.87A	8.96A	9.03A	9.11A
Module Efficiency	15.71%	16.02%	16.33%	16.63%
Operating Temperature	-40°C~+85°C			
Maximum System Voltage	1000Vdc			
Maximum Series Fuse Rating	20A			
Power tolerance	0~+5W			

*STC condition: 1000 W/m²,1.5AM and 25°C cell temperature.

Temperature characteristics

NOCT	46°C±2°C
Temperature Co-efficient of Pmax	-0.398%/°C
Temperature Co-efficient of Voc	-0.34%/°C
Temperature Co-efficient of Isc	0.0576%/°C


Mechanical characteristics

Model No.	SW255P/260P/265P/270P
Cell Type	Polycrystalline silicon 156*156mm
Cell Arrangement	60(6*10)
Dimensions	1640*990*40mm
Weight	19.5Kg
Front Cover	3.2mm tempered glass
Frame Material	Anodized aluminium alloy
Junction Box	IP65 rated
Output Cables	4mm ² ,Length 1000mm
Connectors	MC4 comparable



Packing

Packing	20'GP	40'GP
Pieces per Carton	26/15mantissa	26
Carton/Pallet	1	1
Pallet/Container	14(2PCS mantissa)	28
Pieces/container	342	728

I-V Curve

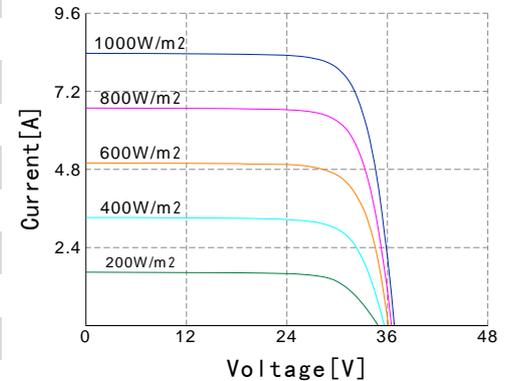

Dimensions

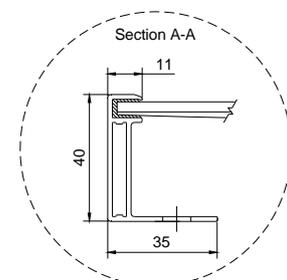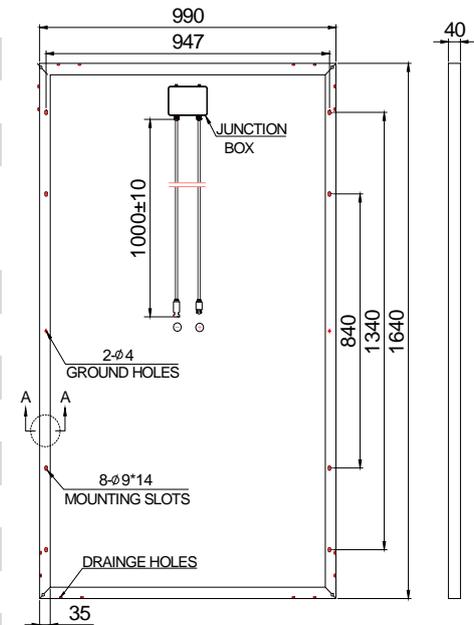

SUNWORTH SOLAR ENERGY CO., LTD

TEL: +86-769-2332 0882

Website: www.sun-worth.com

E-mail: sales@sun-worth.com