


IGNITE THE POWER OF NATURE

Polycrystalline Module

--small size 25Watt

Model (SL25TU-18P) Specifications



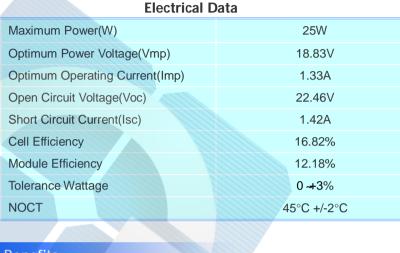

Benefits

- # High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- math Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.











Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Temperature Coefficients

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38





IGNITE THE POWER OF NATURE

Polycrystalline Module --small size 25Watt

Components & Mechanical

Solar Cell	156*27 Poly
Number of Cell(pcs)	2*18
Size of Module(mm)	570*360*28
Front Glass Thikness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	2.6
Frame(Material Corners,etc.)	28#
Temperature Range	-40°C to +85°C
FF (%)	70-78%
Standard Test Conditions	AM1.5 1000W/m² 25°C


Project Picture

Packing

Packing Wooden Box Pieces per 140pcs/Pallets container



Engineering Drawings

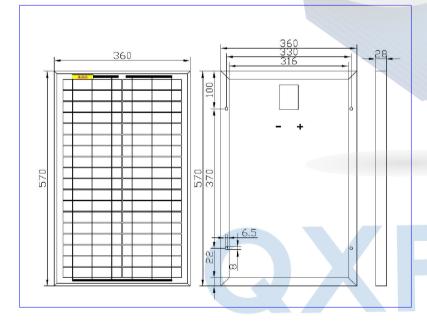

Specifications included in this datasheet are subject to change without notice.









Ningbo Qixin Solar Electrical Appliance Co., Ltd

ADD: No. 37 Jingang Road, Binhai Industrial Park,

Xiangshan County, Ningbo, 315700, China WEB: http://www.nbqxsolar.com

TEL: 0086-(0)574-25758823 FAX: 0086-(0)574-25758824 E-mail: sales@nbqxsolar.com

